
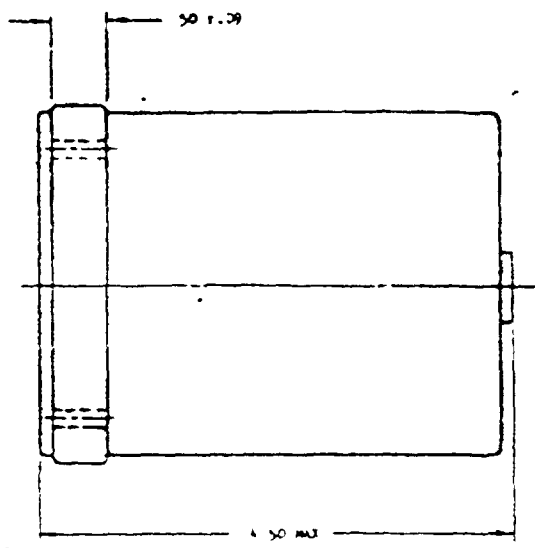


FED SUP CLASS
6618

CASE IN ACCORDANCE WITH MS2533 FOR 3 INCH SIZE EXCEPT AS NOTED

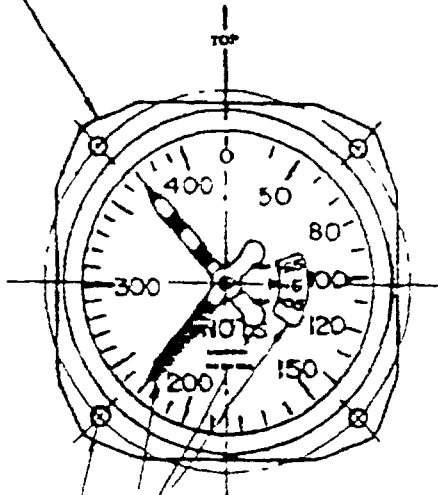

DIALS AND POINTERS SHOW FOR REFERENCE ONLY, SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS


ADJUSTMENT SCREW FOR MAXIMUM SPEED POINTED STOP

1/8 ANCH PLUG IN ACCORDANCE WITH SPECIFICATION MIL-F-1105 COVERING HOLE NUMBER ADJUSTMENT LOCATION OPTIONAL

STATIC INERT, SEE BOSS COLUMN

PITOT PRESSURE INERT COVERED WITHIN G.C., SEE BOSS COLUMN

NOTE: USE STRAIGHT THREAD FITTINGS ONLY
CAUTION DO NOT BLOW IN TUBES

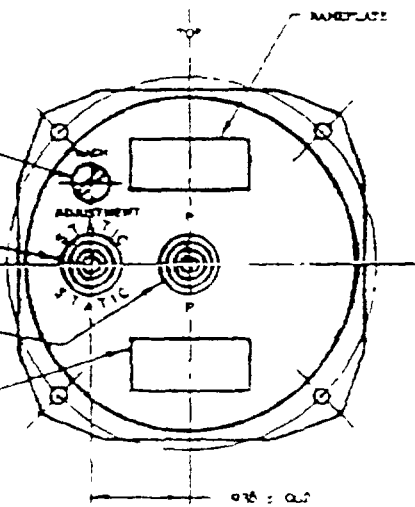

REAR VIEW

DASH NO.	DIAL MARKINGS	SCALE	BOSS	CASEKIT
-1	LUSTERLESS VIZITE	NON-LINEAR	PRESSURE	MIL-D-2050-A / MS2578-A
			STATIC	MIL-D-2050-A / MS2578-A
-2	LUSTERLESS VIZITE	NON-LINEAR	PRESSURE	MIL-D-2050-A / MS2578-A
			STATIC	MIL-D-2050-6 / MS2578-6

NOTES

1. DIMENSIONS IN INCHES
2. INDICATORS SHALL BE SUPPLIED WITH REMOVABLE SPIRIT RITE
3. FOR DESIGN PURPOSES PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREAFTER
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

REVISED AND REDRAWN

P.A. RAFT - Weps	TITLE	MILITARY STANDARD MS25333(Weps)
Other Corp	INDICATOR, INDICATED AIRSPEED, PITOT STATIC MAXIMUM ALLOWABLE SPEED, 40-400 KNOTS	
PROCUREMENT SPECIFICATION MIL-I-21728(Weps)	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (limited circulation)

PROVIDED ON FORM OF 1 AND FORM AND DERIVATIVE

APPROVED 30 July 58 REVISED 6 IS DEC 1963

This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by all military activities. All other military activities are recommended to employ this standard where feasible.