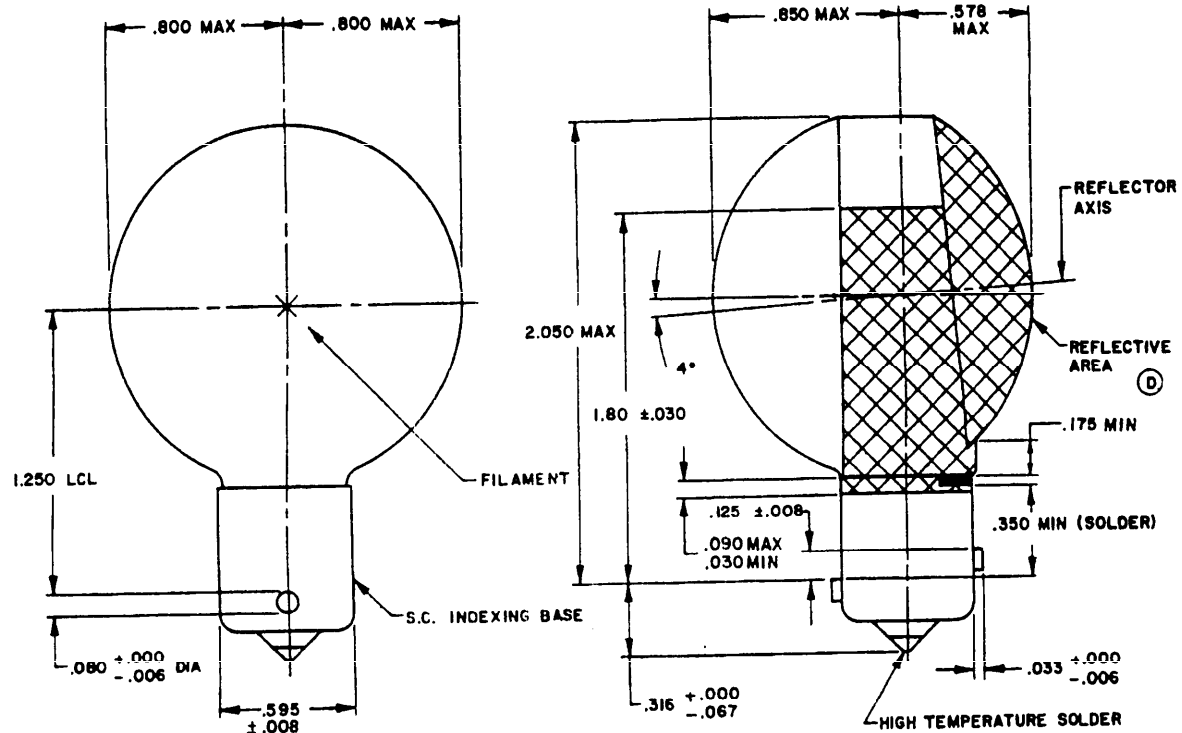


FED. SUP CLASS
6240

DASH NO.	TYPE PER MIL-L-6363	TEMP RATING CONTINUOUS OPERATION		RATINGS			RATED LIFE HOURS	FILAMENT
		°C	°F	VOLTS	AMPERES	WATTS		
-7079	II	154	310	28	1.55	40	150	CC-6
-617	II	176	350	28	1.55			CC-6
-1687	II	154	310	6.2	7.10			C-6

REQUIREMENTS:

1. LIGHT DISTRIBUTION:
CANDLEPOWER, 4800 MIN ON REFLECTOR AXIS
HORIZONTAL AND VERTICAL BEAM SPREAD TO 480 CANDELA POINTS, 20° MIN.

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010 INCH, ANGLES ±½°.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. INTENDED USE - AIRCRAFT LIGHT ASSEMBLIES CONFORMING TO MIL-L-21652 (MS21972 AND MS25277) AND SIMILAR.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This standard has been approved by the Naval Air Systems Command and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review Activities:
Navy - NC
USAF - 82
DLA - GS

P.A. Navy - AS Other Cost USAF - 99	TITLE LAMP, INCANDESCENT -SINGLE CONTACT BAYONET CANDELABRA, GG-12AI BULB	MILITARY STANDARD	
		MS25338	
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 1 SEP 57 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJ. NO. 6240-0375

APPROVED 6 Sep 58 REVISED (A) 26 Jul 60 (B) 1 Oct 64 (C) 25 Oct 66 (D) 15 OCT 86