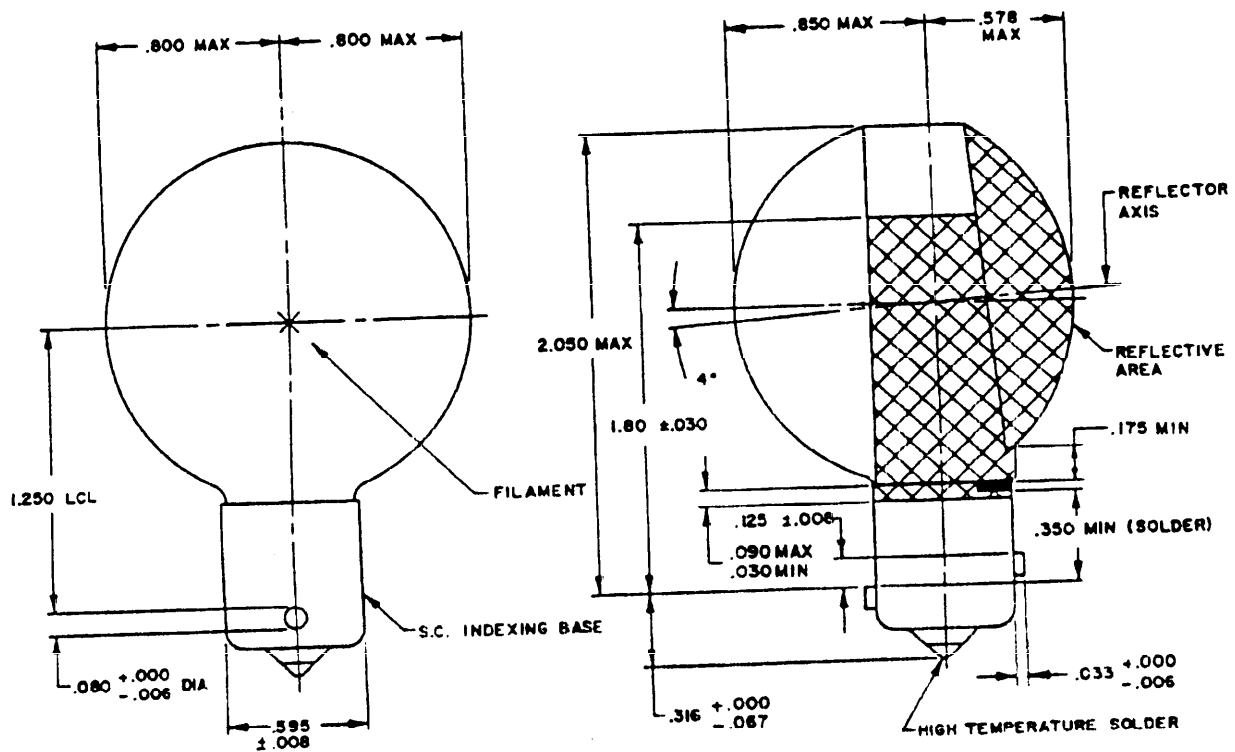


FED. SUP CLASS
6240

DASH NO.	TYPE PER MIL-L-6363	TEMP RATING CONTINUOUS OPERATION		RATINGS			RATED LIFE HOURS	FILAMENT
		°C	°F	VOLTS	AMPERES	WATTS		
-7079	11	154	310	28	1.55	40	150	CC-6
-617	11	176	350	28	1.55			CC-6
-168	11	154	310	6.2	7.10			C-6

REQUIREMENTS:

1. LIGHT DISTRIBUTION:
CANDLEPOWER, 480 MIN ON REFLECTOR AXIS
HORIZONTAL AND VERTICAL BEAM SPREAD TO 480 CANDLEPOWER POINTS, 100 MIN.

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS $\pm .010$ INCH, ANGLES $\pm 5^\circ$.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. INTENDED USE - AIRCRAFT LIGHT ASSEMBLY CONFORMING TO MIL-L-2100, MIL-2100A AND MIL-2100B AND SIMILAR.

(E) CANCELLED AS OF 1 JUNE 1989 FOR NEW PROCUREMENTS USE MIL-L-6363/1

P.A. Navy - AS Other Cost USAF - 99	TITLE LAMP, INCANDESCENT -SINGLE CONTACT BAYONET CANDELABRA, GG-12AI BULB	MILITARY STANDARD MS25338
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES	SHEET . OF 1

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. FORM NO. 6240-1098

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.
This standard has been approved by the Naval Air Systems Command and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where applicable.

Review Activities:

Navy - MC
USAF - 82
DLA - GS

APPROVED 8 Sep 68 REVISED (A) 28 Jul 60 (B) 1 Oct 64 (C) 26 Oct 69 (D) 15 OCT 1986 (E) 1 JUNE 1989