

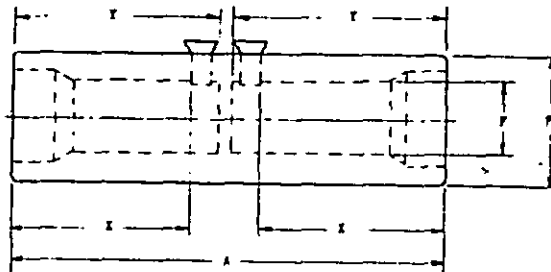



REVIEW SYMBOLS:
None
REVIEW SYMBOLS:
USAF - 11, 85
Navy - 11, 85
Army - EL

"Technical information is current as of the date of this document.
For future coordination of changes to this document, draft circulation
should be based on the information in the current document."

This military standard is approved for use by all Departments
in agreement of the Department of Defense. Selection for all new
engineering and design applications and for repetitive use shall
be made from this document.

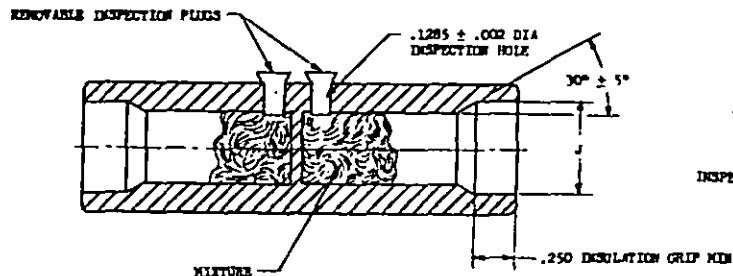

MESH NO.	CABLE SIZE	A	B	F	J DIA	K	Y
-1	5	2.133	.355	.167	.250	.960	1.125
-2	6	2.143	.343	.219	.311	.979	1.164
-3	8	2.319	.512	.272	.375	1.175	1.364
-4	10	3.125	.601	.362	.452	1.370	1.505
-5	12	3.335	.611	.376	.516	1.370	1.505
-6	14	3.213	.692	.425	.563	1.370	1.505
-7	16	3.312	.732	.492	.625	1.414	1.596
-8	20	3.537	.836	.527	.703	1.476	1.643
-9	22	3.713	.947	.596	.766	1.617	1.822

NOTES:

- (1) MATERIAL: WEBCOAT ALUMINUM, MINIMUM CONDUCTIVITY 57% IACS. MAXIMUM HARDNESS ROCKWELL H75
FINISH: TIN PLATE - ELECTRODEPOSITED .0003 INCH MINIMUM.
SPlice SHALL BE OF ONE PIECE CONSTRUCTION.
DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy-WEB Other: Gess JAF-11 AONT- EL	(A)	TITLE SPlice-Permanent GRIP STYLE, 2 WAY TYPE FOR ALUMINUM AIRCRAFT WIRE, CLASS 1	MILITARY STANDARD MS25439
PROCUREMENT SPECIFICATION MIL-T-7099	SUPERSEDES		SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 25 JAN 60 REVISED 15 MAY 64