


NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any right or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

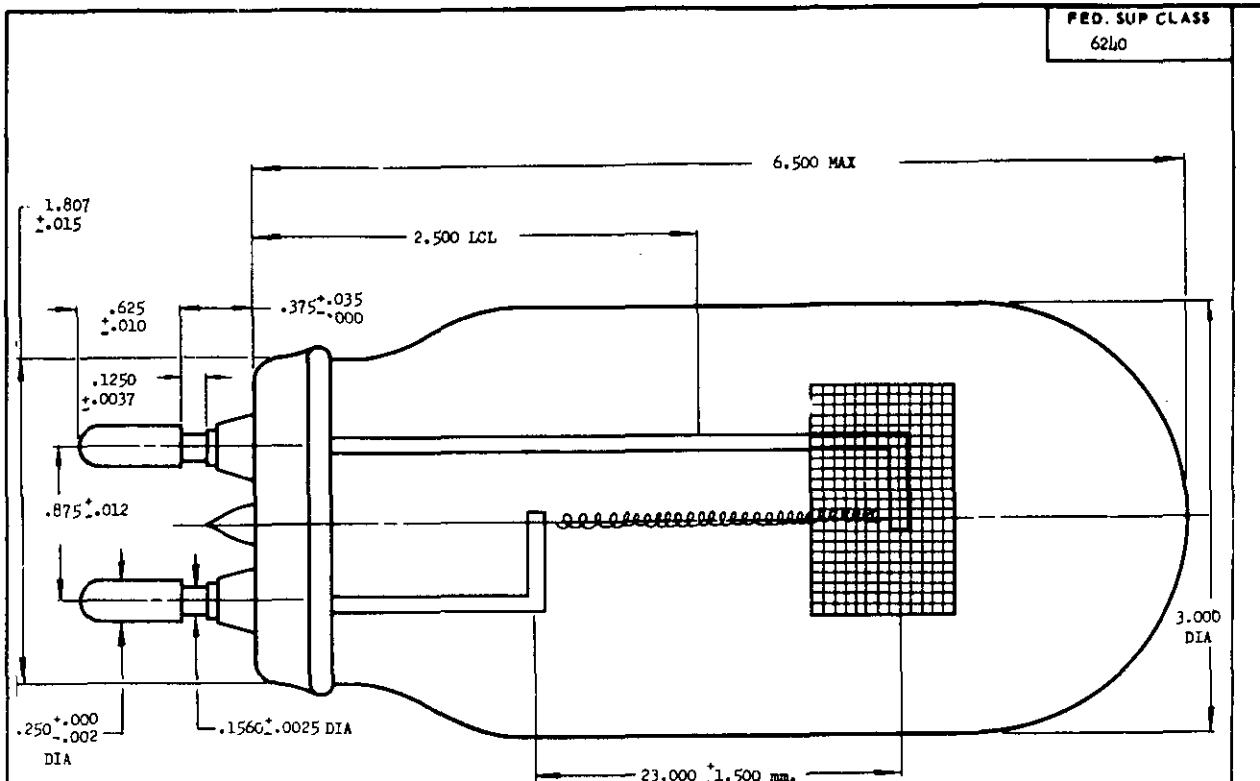

DASH NO.	INITIAL WATTS 30	RATED AMPERES	RATED INITIAL LUMENS (NOMINAL)	INITIAL EFFICIENCY (LWP) 22	FILAMENT TYPE	RATED AVERAGE LABORATORY LIFE (HRS)	FINISH
-1	500	20	12,000	24	C-8	300	CLEAR

DIMENSIONS IN INCHES, EXCEPT AS SPECIFIED. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .062$.
 AXIAL ALIGNMENT TOLERANCE: $\pm .031$.
 MAXIMUM EXCURSION OF BULB FROM BASE AXIS: 1.562.
 MAXIMUM WATTAGE INCREASE DURING LIFE: 10 PERCENT.

FILAMENT SUPPORTING STRUCTURE SHALL OBSCURE LESS THAN 25% OF THE FILAMENT FOR ANY LINE OF SIGHT WITHIN $\pm 45^\circ$ OF THE HORIZONTAL.
 ANY SUITABLE FILAMENT SUPPORTING STRUCTURE MAY BE USED.

MINIMUM MARKING: 500W, 20A, BASE DOWN, MANUFACTURER'S (NAME, ABBREVIATION, OR TRADE-MARK), AND MS PART NO.

THE USE AND SHAPE OF THE COLLECTOR GRID IS OPTIONAL.

Ⓐ **CANCELLED**

AFTER 13 MAY 1982
 NO SUPERSEDING STANDARD.

This standard has been approved by the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - Wep	TITLE	MILITARY STANDARD
Other Cust USAF	LAMP, INCANDESCENT— T-24 BULB, MEDIUM BIPOST BASE	MS25451(ASG)
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES:	SHEET 1 OF 1