



FED. SUP CLASS
5945

INACTIVE FOR NEW DESIGN AFTER 5 JUN 87
NO SUPERSEDING STANDARD.
(FOR NEW DESIGN USE MIL-R-6106/50)

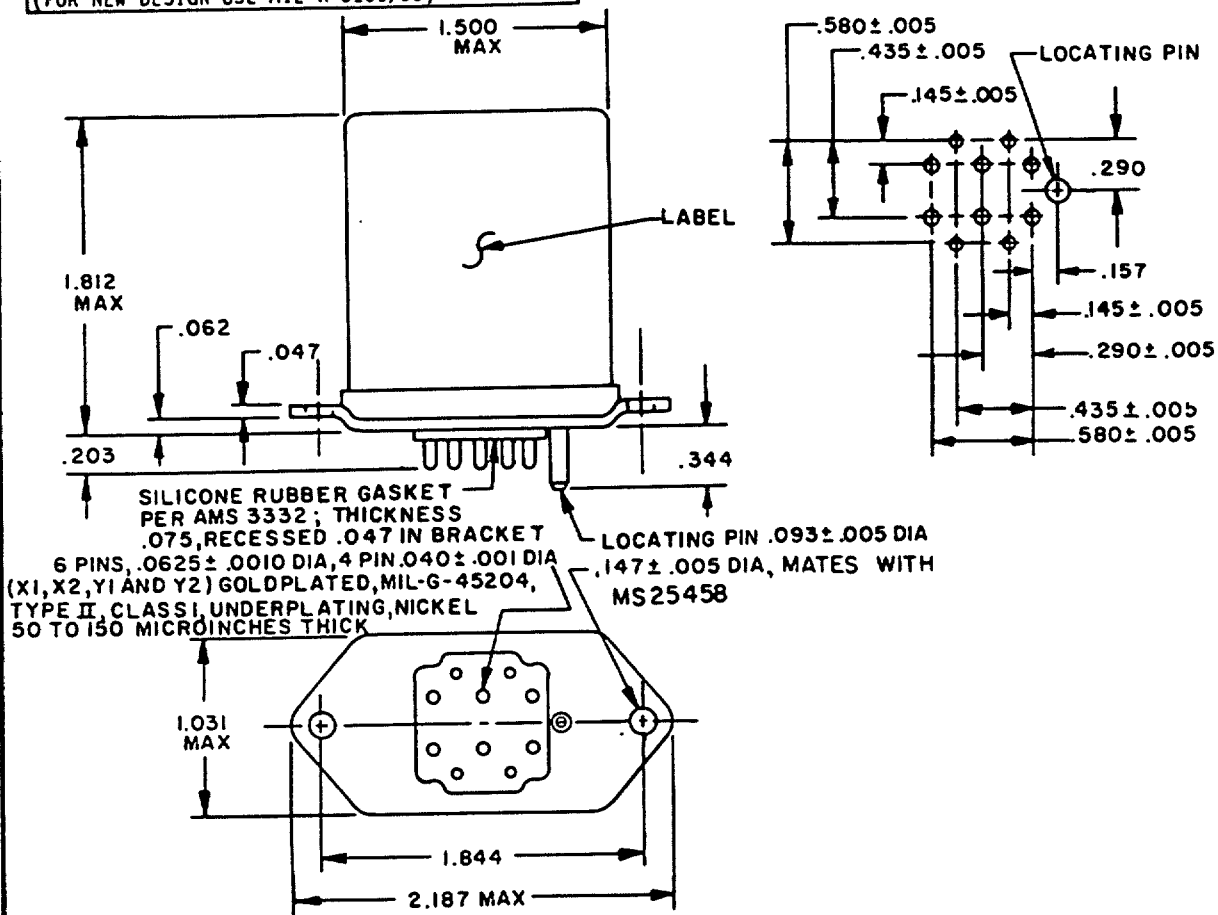

Inches	mm	Inches	mm
.001	0.03	.203	5.16
.005	0.13	.293	7.74
.040	1.02	.344	8.74
.047	1.19	.435	11.05
.062	1.57	.580	14.73
.0625	1.59	1.031	26.19
.093	2.36	1.500	39.10
.145	3.68	1.812	46.02
.147	3.73	1.844	46.84
.157	3.99	2.187	55.55

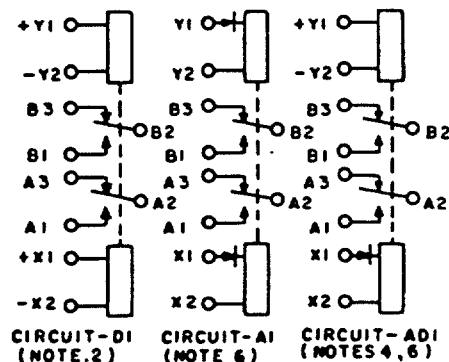

(F) ENTIRE STANDARD REVISED

P.A AF - 85

International
interest

TITLE
RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2 PDT,
TYPE I, MAGNETIC LATCH, SOCKET MOUNTED,
HERMETICALLY SEALED

MILITARY STANDARD

Other Cust
Navy - AS

MS25457

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 1 OF 5

DD FORM 672
1 MAY 73
AMSC N/A

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

5945-0745-16

User activities: Army -
Navy -
Air Force -Review activities: Army - EC
Navy -
Air Force - 11

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVISED (F) 5 JUN 87

APPROVED 1 Nov 1960

User activities: Army -
Navy -
Air Force -Review activities: Army -
Navy - EC
Air Force - 11

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.010 (0.25 mm).
4. Relay is magnetically latched in both positions. Caution note to observe polarity must appear on relays with dc coils.
5. Terminal numbers need not appear on relay headers provided there is affixed to the relay a suitable legible circuit diagram that permanently and positively identifies each terminal location specified herein.
6. The use of diodes on ac relays is optional. Actual application must be shown on label.
7. Shock, vibration, and acceleration requirements application with coils de-energized.
8. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
9. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

TABLE I. Dash numbers and characteristics.

Dash number MS 25457-	Type	Coil	Terminal type	Max weight in pounds
D1	I	dc	Plug in	0.30
A1	I	ac	Plug in	0.32
AD1	I	ac-dc	Plug in	0.32

P.A AF - 85

International
interestOther Cust
Navy - ASTITLE
RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2 PDT,
TYPE I, MAGNETIC LATCH, SOCKET MOUNTED,
HERMETICALLY SEALED

MILITARY STANDARD

MS25457

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 2 OF 5

DD FORM 672
MAY 73
AMSC N/A

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 1 Nov 1960
REVISED (F) ENTIRE STANDARD REVISED

User activities: Army -
Navy -
Air Force -

Review activities: Army -
Navy -EC
Air Force -II

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
5945

TABLE II. Operating characteristics.

MS part no. MS25457-	Coil data										Time (milliseconds max)						
	Coil	Nominal		Max		Max pick-up voltage				Drop- out voltage	Operate 4/ _____	Release 5/ _____		Contact bounce			
Volts 1/ _____	Freq. Hz	Res Ω	Volts	Amperes	Normal 3/ _____	High temp test	Cont current test				HD	NC	HU	NC	Main	Aux	
D1	X1, X2 Y1, Y2	28	dc	N/A	29	0.17	18	18	19.8	N/A	25	N/A	2	2			
A1	X1, X2 Y1, Y2	115	400 $\overline{2/}$	N/A	122	0.07	90	90	95	N/A	25	N/A	2	2			
AD1	X1, X2 Y1, Y2	115	400 $\overline{2/}$	N/A	122	0.07	90	90	95	N/A	25	N/A	2	2			
		28	dc	N/A	29	0.17	18	18	19.8	N/A	25	N/A	2	2			

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.

2/ MS25457-A1 and AD1 may be used on 60 Hz if maximum ambient temperature is

limited to +5°C (maximum coil current shall be 0.077 ampere).

3/ Over the temperature range.

4/ With nominal coil voltage.

5/ From nominal coil voltage.

P.A. AIR FORCE 85

Other Cust
NAVY - AS

Procurement Specification
MIL-R-6106

International
interest

TITLE
RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2 PDT,
TYPE I, MAGNETIC LATCH, SOCKET MOUNTED,
HERMETICALLY SEALED

SUPERSEDES:

MILITARY STANDARD

MS25457

PAGE 3 OF 5

APPROVED 1 NOV 1960

REVISED (F) ENTIRE STANDARD REVISED

FED. SUP CLASS
5945User activities: Army -
Navy -
Air Force -Review activities: Army -
Navy - EC
Air Force - II

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10 ³	28 V dc		115 V ac, 1 phase		115/200 V ac, 3 phase 1/			See appropriate notes
		Main	Aux	Main	Aux	Main	Aux	Aux	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz 60 Hz	
Resistive	100	10	10	10	6			10 6	
Inductive	100								
Inductive	20	6	6	10	4	10	4		
Motor	100	4	4	4	3	4	3		
Lamp	100	2	2	2	1.5	2	1.5		
Transfer load									2/
Mechanical life reduced current	400	12.5	12.5	2.5	2	2.5	2		
Intmd current		Applicable per specification							

1/ Absence of value indicates relay is not rated for 3-phase applications.
 2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

APPROVED

REVISED (F) ENTIRE STANDARD REVISED

P.A.
AIR FORCE 85
Other Cust
NAVY - ASInternational
interestTITLE
RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2 PDT,
TYPE I, MAGNETIC LATCH, SOCKET MOUNTED,
HERMETICALLY SEALED

MILITARY STANDARD

MS25457

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 4 OF 5

DD FORM
1 MAY 73 672

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army -
Navy - EC
Air Force - II

User activities: Army -
Navy -
Air Force -

FED. SUP CLASS
5945

Environmental characteristics

Temperature range -70°C to +125°C
Max altitude rating 80,000 ft
Shock G-level 50 G
Duration 11 ms
Max duration contact opening 10 μs
Vibration - sinusoidal 10 μs
G-level 10 G
Frequency range 5 - 1500 Hz
Acceleration 15 G

Electrical characteristics

Insulation resistance, initial 100 megohms
After life or environmental tests 50 megohms

Dielectric strength initial (sea level)
Initial After life tests
Coil to case 1,000 V rms 1,000 V rms
Aux contacts
All other points 1,500 V rms 1,125 V rms

Dielectric strength (altitude)
(When mounted in mating socket)
Coil to case 80,000 ft
Aux contacts 500 V rms
All other points 500 V rms

Max contact drop initial 0.150 volt
After life test 0.175 volt
Overload current 40 amperes dc,
60 amperes ac
Rupture current 50 amperes dc,
80 amperes ac
Duty rating Continuous
RFI specification MIL-STD-461
(Applicable to coil circuits of ac operated relays)

Quality conformance inspection

Performance of groups B and C tests are not applicable.

P.A.
AIR FORCE 85
Other Cust
NAVY - AS

International
Interest

TITLE
RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2 PDT,
TYPE 1, MAGNETIC LATCH, SOCKET MOUNTED,
HERMETICALLY SEALED

MILITARY STANDARD

MS25457

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 5 OF 5

APPROVED 1 NOV 1960

REVISED (F) ENTIRE STANDARD REVISED

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE