


Reviewers:
Navy - AS, EC
Air Force 85, 11

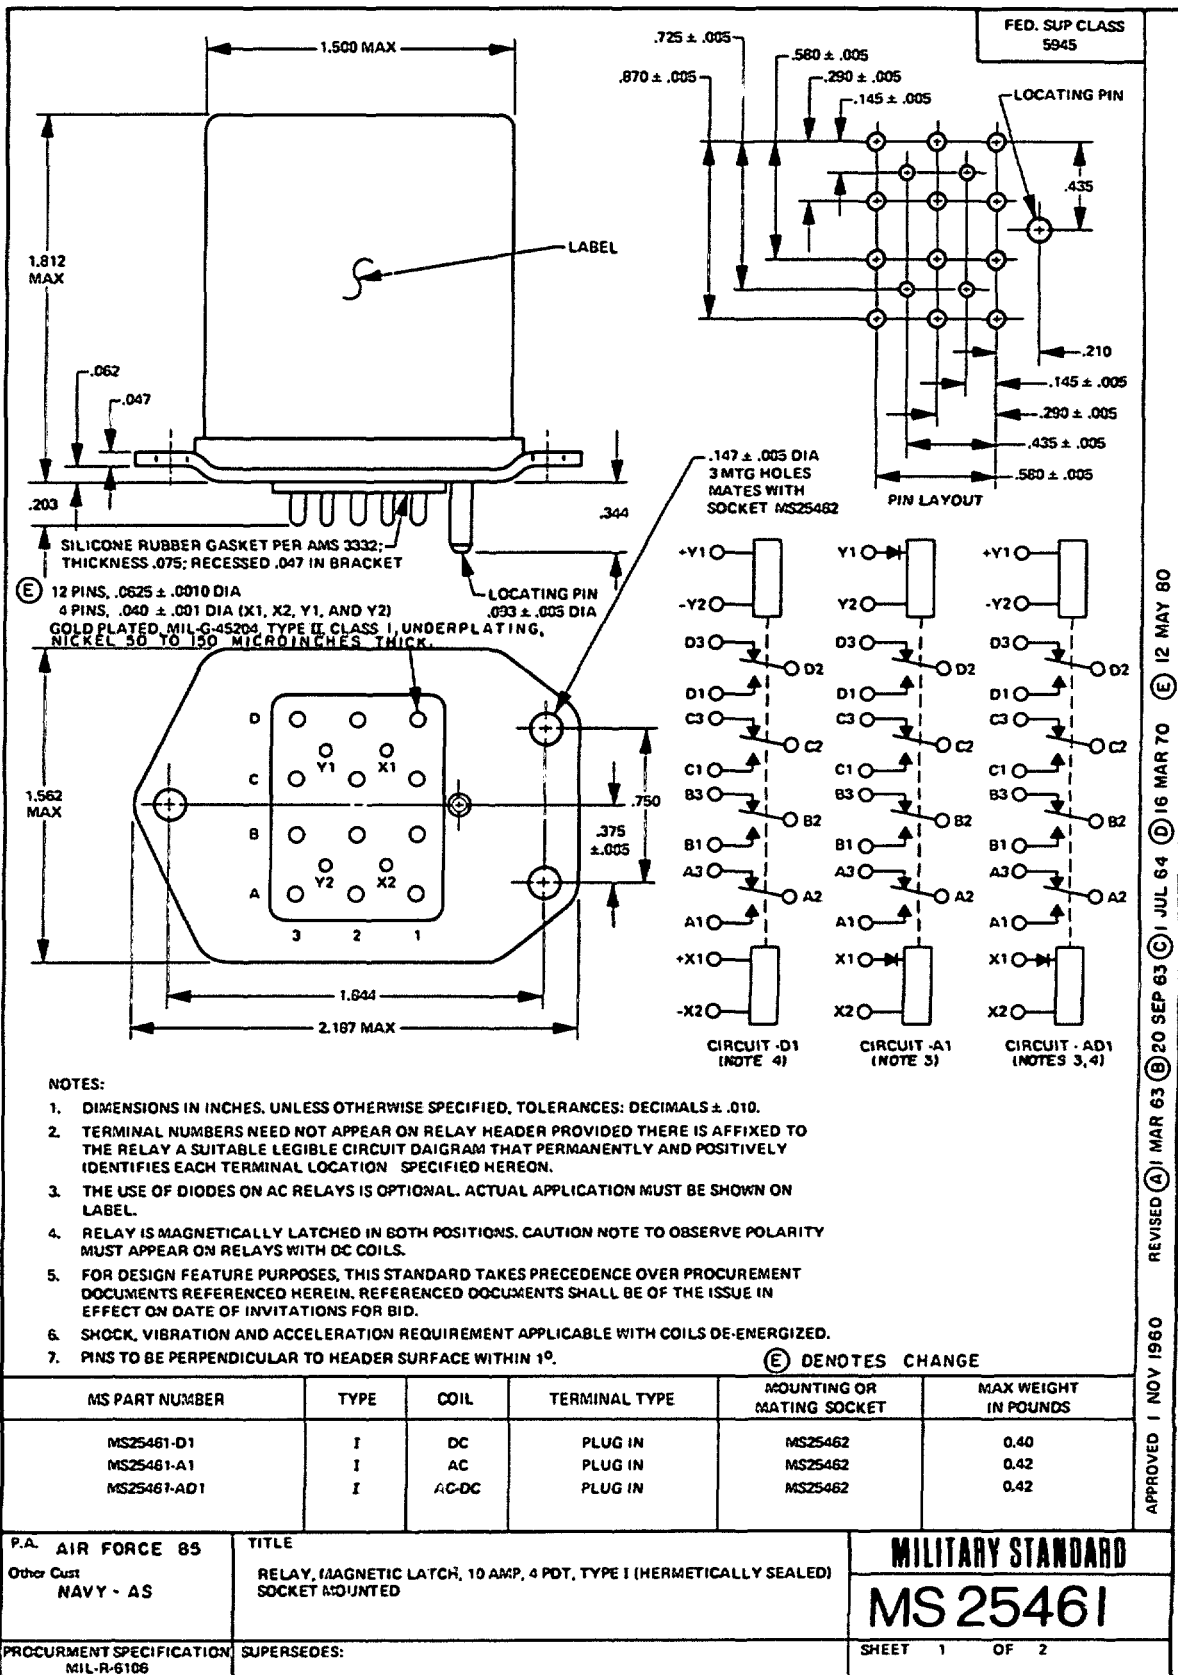

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewers :
Navy - AS, EC
Air Force 85, 11

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

OPERATING CHARACTERISTICS													FED. SUP CLASS 5945															
MS PART NO. MS25461-	C O I L	COIL DATA									TIME-MILLISECONDS - MAX. 6/																	
		Nominal			Max.		Max Pick-up Voltage			Drop Out Voltage 1/	Operate	Release	Bounce															
		Volts	Freq Hz	Res Ω	Volts	Amp	Normal 1/	High Temp Test	Cont Current Test				Main		Aux													
													NO	NC	NO	NC												
D1	X1,X2 Y1,Y2	28	DC	—	29	0.17	18	18	19.8	N/A	25	N/A	2	2	—	—												
A1	X1,X2 Y1,Y2	115	400 4/	—	122	0.07	90	90	95	N/A	25	N/A	2	2	—	—												
AD1	X1,X2	115	400 4/	—	122	0.07	90	90	95	N/A	25	N/A	2	2	—	—												
	Y1,Y2	28	DC	—	29	0.17	18	18	19.8	N/A	25	N/A	2	2	—	—												
RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED																												
TYPE OF LOAD	LIFE OPERATING CYCLES $\times 10^3$	28 VDC				115 VAC, 1 PHASE				115/200 VAC, 3 PHASE 2/				See Appropriate Notes														
		Main		Aux		Main		Aux		Main		Aux																
		NO	NC	NO	NC	400Hz	60Hz	400Hz	60Hz	400Hz	60Hz	400Hz	60Hz															
RESISTIVE	100	10	10	—	—	10	6	—	—	10	6	—	—															
INDUCTIVE	100																											
INDUCTIVE	20	6	6	—	—	10	4	—	—	10	4	—	—															
MOTOR	100	4	4	—	—	4	3	—	—	4	3	—	—															
LAMP	100	2	2	—	—	2	1.5	—	—	2	1.5	—	—															
TRANSFER, LOAD														3/														
MECHANICAL LIFE REDUCED CURRENT	400	2.5	2.5	—	—	2.5	2	—	—	2.5	2	—	—															
MIN CURRENT		APPLICABLE PER SPECIFICATION																										
ENVIRONMENTAL CHARACTERISTICS																												
TEMPERATURE RANGE -70°C TO +125°C																												
MAX ALTITUDE RATING 80,000 FT																												
SHOCK G - LEVEL 50 G																												
DURATION 11ms																												
MAX DURATION CONTACT OPENING 10 μ S																												
VIBRATION - SINUSOIDAL																												
G - LEVEL 10 G																												
FREQUENCY RANGE 5 - 1500 Hz																												
ACCELERATION 15 G																												
ELECTRICAL CHARACTERISTICS																												
INSULATION RESISTANCE, INITIAL 100 MEGOHMS																												
AFTER LIFE OR ENVIRONMENTAL TESTS 50 MEGOHMS																												
DIELECTRIC STRENGTH (SEA LEVEL)																												
<table border="1"> <thead> <tr> <th></th> <th>Initial</th> <th>After Life Tests</th> </tr> </thead> <tbody> <tr> <td>COIL TO CASE</td> <td>1000 VRMS</td> <td>1000 VRMS</td> </tr> <tr> <td>AUX CONTACTS</td> <td>—</td> <td>—</td> </tr> <tr> <td>ALL OTHER POINTS</td> <td>1500 VRMS</td> <td>1125 VRMS</td> </tr> </tbody> </table>																		Initial	After Life Tests	COIL TO CASE	1000 VRMS	1000 VRMS	AUX CONTACTS	—	—	ALL OTHER POINTS	1500 VRMS	1125 VRMS
	Initial	After Life Tests																										
COIL TO CASE	1000 VRMS	1000 VRMS																										
AUX CONTACTS	—	—																										
ALL OTHER POINTS	1500 VRMS	1125 VRMS																										
DIELECTRIC STRENGTH (ALTITUDE) 5/																												
<table border="1"> <thead> <tr> <th></th> <th>80,000 FT</th> </tr> </thead> <tbody> <tr> <td>COIL TO CASE</td> <td>500 VRMS</td> </tr> <tr> <td>AUX CONTACTS</td> <td>—</td> </tr> <tr> <td>ALL OTHER POINTS</td> <td>500 VRMS</td> </tr> </tbody> </table>																		80,000 FT	COIL TO CASE	500 VRMS	AUX CONTACTS	—	ALL OTHER POINTS	500 VRMS				
	80,000 FT																											
COIL TO CASE	500 VRMS																											
AUX CONTACTS	—																											
ALL OTHER POINTS	500 VRMS																											
MAX CONTACT DROP INITIAL 0.150 VOLTS																												
AFTER LIFE TEST 0.175 VOLTS																												
OVERLOAD CURRENT 40 AMP DC 60 AMP AC																												
RUPTURE CURRENT 50 AMP DC 80 AMP AC																												
DUTY RATING CONTINUOUS																												
RFI SPEC MIL-STD-461																												
(APPLICABLE TO COIL CIRCUITS OF AC OPERATED RELAYS)																												
NOTES, APPLICATION																												
1/ OVER TEMPERATURE RANGE																												
2/ ABSENCE OF VALUE INDICATES RELAY IS NOT RATED FOR 3 PHASE APPLICATIONS																												
3/ TRANSFER LOAD INDICATES RELAY SUITABLE FOR TRANSFER BETWEEN UNSYNCHRONIZED AC POWER SUPPLIES AT RATING INDICATED.																												
4/ MS25461-A1 AND AD1 MAY BE USED ON 60 Hz IF MAX. AMBIENT TEMPERATURE IS LIMITED TO 85 DEG C. MAX. COIL CURRENT WILL BE 0.077 AMP.																												
5/ WHEN MOUNTED IN MATING SOCKET.																												
6/ WITH NOMINAL COIL VOLTAGE																												
P.A. AIR FORCE 85		TITLE										MILITARY STANDARD																
Other Cust NAVY - AS		RELAY, MAGNETIC LATCH, 10 AMP, 4 PDT, TYPE I (HERMETICALLY SEALED) SOCKET MOUNTED										MS25461																
PROCUREMENT SPECIFICATION MIL-R-6106		SUPERSEDES:										SHEET 2																

APPROVED 1 NOV 1960 REVISED ① SEE SHTS 1 & 2 ② FOR CHANGES SEE SHEET 1