

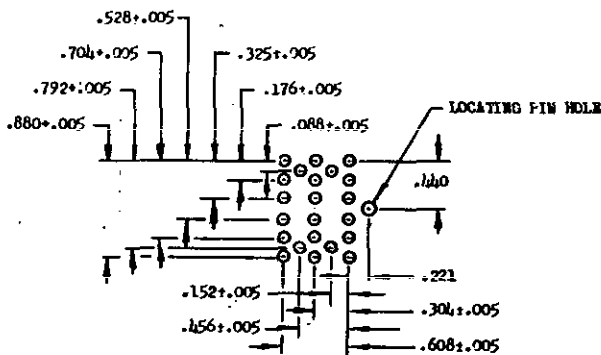
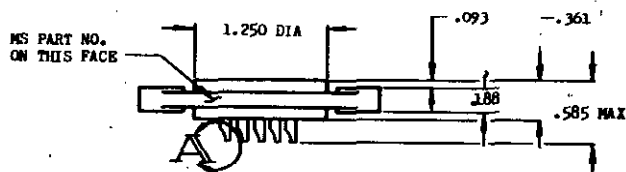


This standard has been approved by the Department of the Navy and the Department of the USAF and is mandatory for use by their activity. All other military activities are required to employ this standard where suitable.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded as an implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

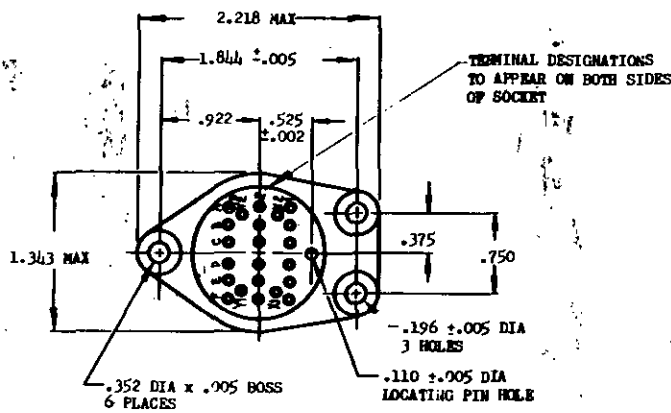

PIN RECEPTACLE LAYOUT



DETAIL A

(A) INSERTION AND WITHDRAWAL FORCES  
MEASURED WITH:

- (B) VIBRATION, MIL-STD-202, METHOD 204, CONDITION B, WITH MS25463 INSERTED  
(C) CONTACT TABS, PARA 3.8, MIL-S-12883  
(D) AMBIENT TEMPERATURE RANGE  
(E) PIN ENTER  
(F) DIELECTRIC, MIN, WITHOUT MATING RELAY ENGAGED:  
SEA LEVEL  
ALTITUDE (80,000 FT)  
(G) MATING RELAY

1 GZ MIN  
10 G, 10 TO 1500 CPS  
NOT APPLICABLE  
-65°C TO +120°C  
PARA. 3.3.1.2, MIL-C-5015  
2500 VMS  
500 VMS  
MS25463

MATERIAL: BODY, MIL-M-19833, TYPE GDI-30F.  
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.010.

ⓑ CANCELLED AFTER 19 JUNE 1981. NO SUPERSEDING STANDARD.


FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - Wep Other Cost USAF - SGEE	TITLE SOCKET, RELAY, ELECTRICAL, 22 CONTACTS, 5 AMP	MILITARY STANDARD MS25464(ASG)
PROCUREMENT SPECIFICATION MIL-S-12883	SUPERSEDES:	SHEET 1 OF 1



DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS  
5935

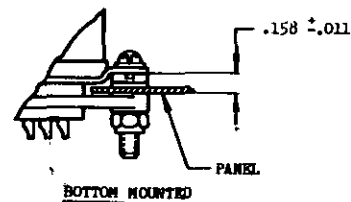

USE WASHERS SUPPLIED WITH MS25332-1 TO ACCOMPLISH THE INDICATED SPACING

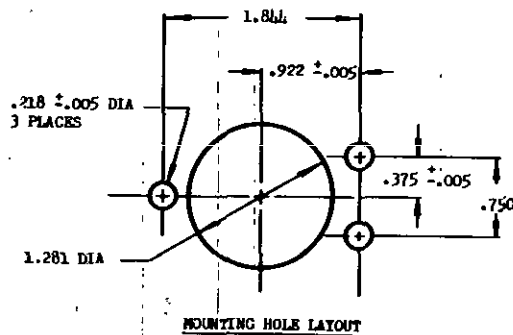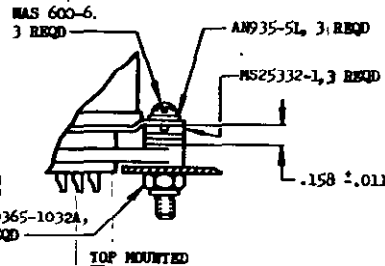

DASH NO.	MAX WT LB WITHOUT HARDWARE
-1	.06

APPROVED 1 Nov 60 REVISED (A) 1 Mar 63 (B) 19 June 1981