


INCH-POUND

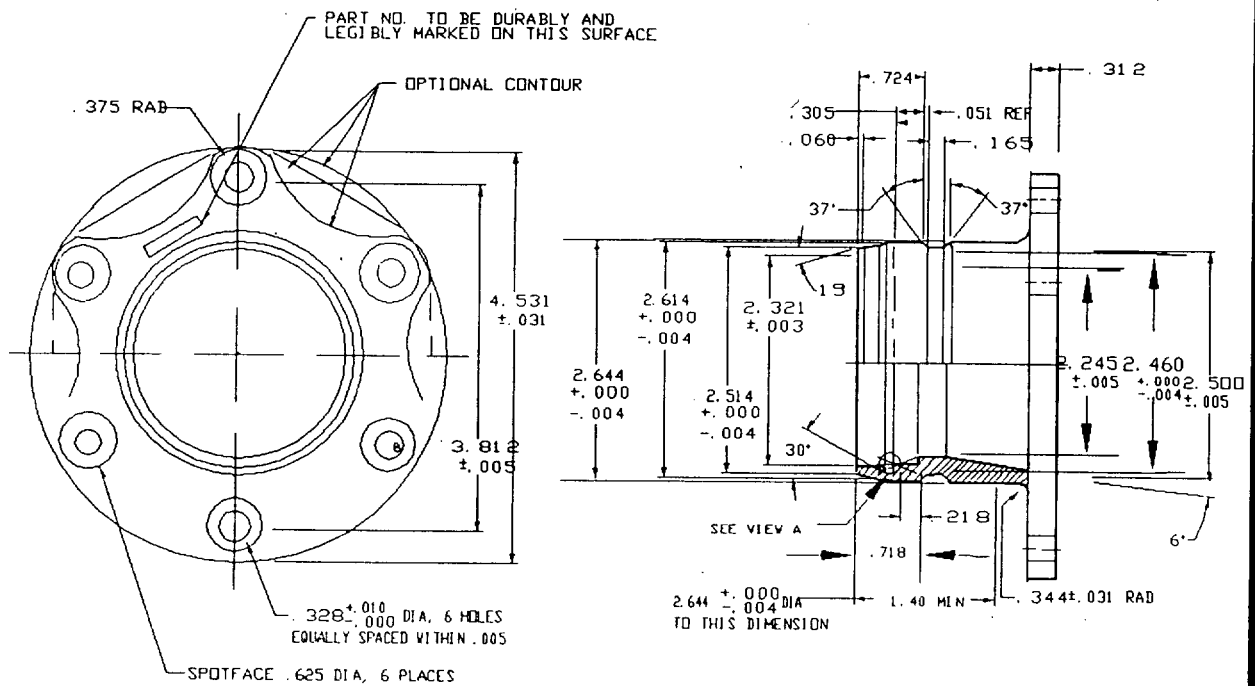

| MS PART NO. | MATERIAL |
|-------------|----------|
| MS26549 -1 | AL ALLOY |
| MS26549 -2 | BRONZE |

A. NOTES:

- ALL MACHINED SURFACES SHALL BE SMOOTH TO 63 MICROINCHES R_a MAXIMUM IN ACCORDANCE WITH ANSI B46.1
- DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS .010, ANGLES° 0.5.
- THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
- THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

PREPARING ACTIVITY: NAVY-AS
CUSTODIAN: NAVY - AS
AIR FORCE: DLA - CS
REVIEW ACTIVITY: NAVY - SH
NAVY - OS
PROJECT NUMBER: 4730-H13

MILITARY SPECIFICATION SHEET

TITLE
NIPPLE, QUICK DISCONNECT, 2-1/2 INCH,
PRESSURE FUEL SERVICING, FLANGE TYPE

SPECIFICATION SHEET NUMBER 8 AUG 1995
MS26549 REV: A
SUPERSEDING
MS26549 (AER) DATE: 17 MARCH 1958
AMSC-N/A FSC 4730

DISTRIBUTION STATEMENT

A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

PAGE 1 OF 1