


SECTION A-A
ENLARGED

—HINGE MATERIAL OPTIONAL
HINGE TO INCORPORATE
SUITABLE SPRING FOR
HOLDING LID IN OPEN POSITION

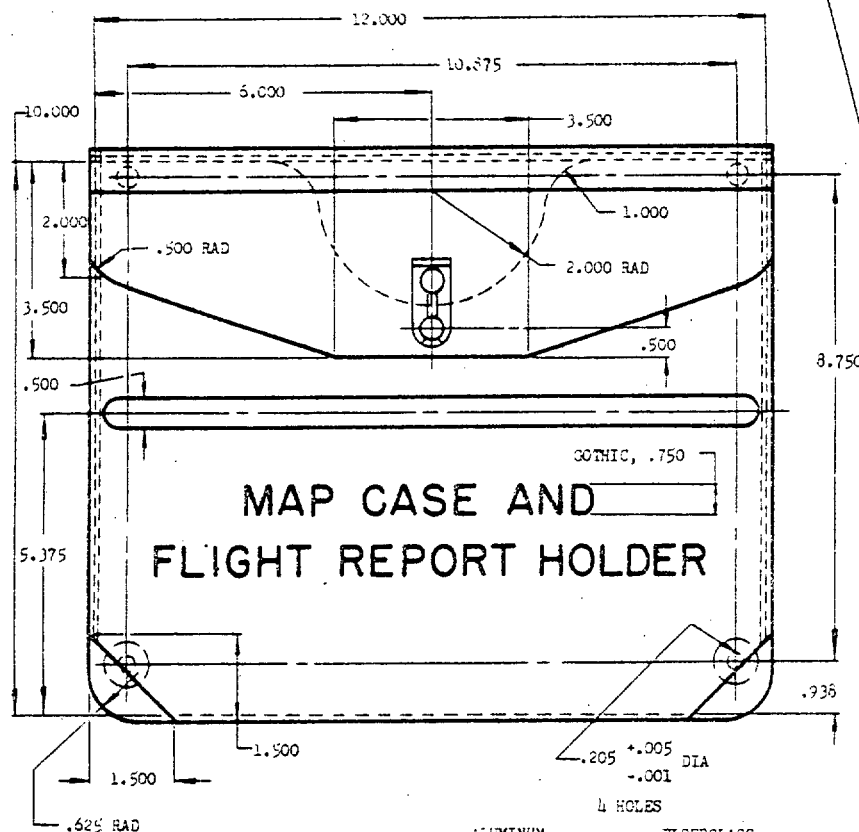

SNAPSLIDE FASTENER, AN3195-6
SNAPSLIDE FASTENER STUD,
AN3195-1

GOTHIC, .750

MAP CASE AND _____
FLIGHT REPORT HOLDER

ALUMINUM

DASH NO.

-1

FLAERGLASS

PAGE NO.

(a)

- STIFFENING RIB TO BE FORMED
DURING FABRICATION

MATERIAL: ALUMINUM ALLOY, SPECIFICATION QQ-A-561, 1/2 HARD, .040 THICK.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .032$.

GENERAL OUTLINE AND DIMENSIONS SHOWN, OTHER DIMENSIONS LEFT OPEN TO STANDARD FABRICATION PRACTICE OF MATERIAL USED.

standard has been approved by the Fleetsp (Department of the Navy) and the Department of the USAF, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HERETIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - wep		TITLE	MILITARY STANDARD
Other Cust USAF		CASE, FLIGHT REPORT HOLDER AND MAP	MS26556(ASG)
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: AN2011	SHEET 1 OF 1