


**NOTICE**—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement transaction, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished such data in any way supplies no implied warranty, specification, or other data is not to be regarded by implication or otherwise as a warranty by the Government, its agents, or its subcontractors in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

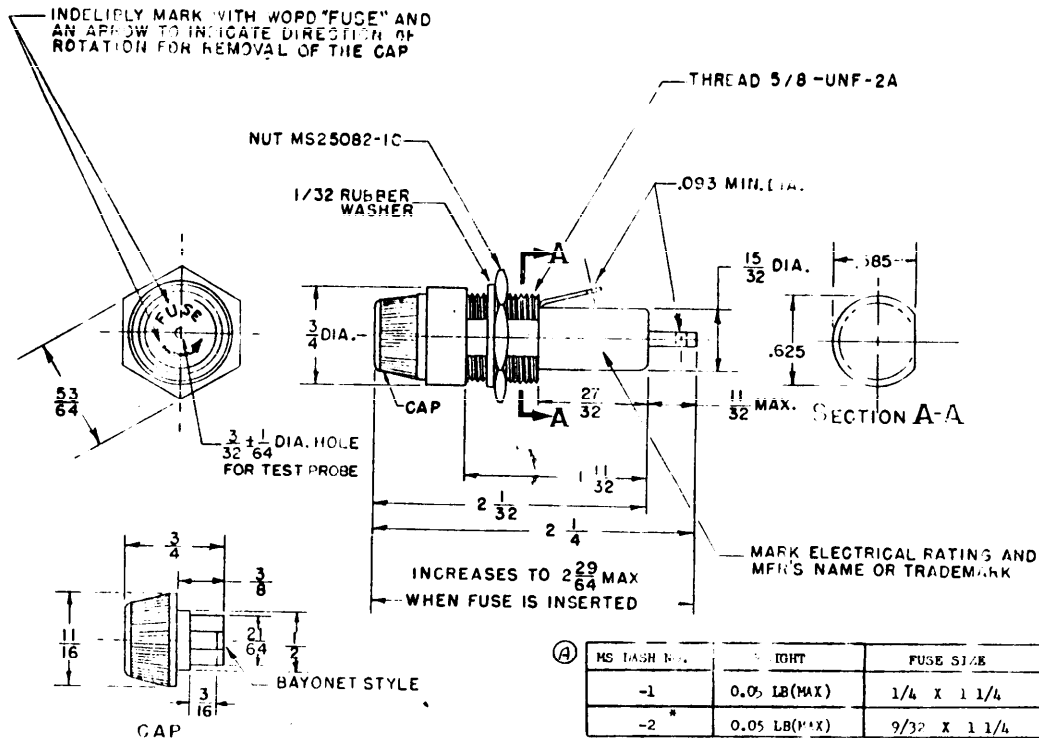

## NOTES AND SPECIFICATIONS

MATERIALS: - CONTACTS: BRASS OR BERYLLIUM COPPER; TERMINALS: BRASS OR PHOSPHOR BRONZE; BODY & CAP: MOLDED PLASTIC.  
FINISH: - ELECTRICAL CONTACTS: BRIGHT ALLOY PLATED; TERMINALS: HOT-SOLDER DIPPED.  
ELECTRICAL RATING: - CURRENT: 0-15 AMP; VOLTS: 0-250; FUSES PER MIL-P-15160.

FUSEHOLDER MUST MEET THE FOLLOWING SPECIFICATIONS: (1) VOLTAGE DROP: 20 MV(MAX) WITH 15 AMPERES WHILE BEING SUBJECTED TO VIBRATION PER PROCEDURE I OF MIL-E-5272. (2) DIELECTRIC: 1250 VOLTS (RMS) 60 CYCLES PER 1 MINUTE BETWEEN TERMINALS AND BETWEEN TERMINALS AND MOUNTING PANEL. (3) SALT SPRAY: 120 HOURS PER MIL-E-5272. (4) RIP PROOF: AS SPECIFIED IN MIL-STD-105. (5) TORQUE: METAL INSERT IN CAP - 36 POUND-INCHES, WITH NO LOOSENING. (6) MOUNTING: SINGLE HOLE, 5/8 DIAMETER, FOR PANELS UP TO 5/16 THICK. (7) SCREW THREADS: PER NIS HANDBOOK H-28, SEC. IV. (8) SPACING BETWEEN RESPECTIVE CONTACTS MEASURED LONGITUDINALLY ALONG THE INTERIOR WALL - 13/32 (MIN). (9) CONSTRUCTION DETAILS OPTIONAL EXCEPT THAT ALL CAPS MUST BE COMPLETELY INTERCHANGEABLE ON ANY FUSEHOLDER.

(ALL ABOVE TESTS TO BE PERFORMED ON A SINGLE FUSEHOLDER)

- Ⓐ CAP MUST RETAIN FUSE WHEN REMOVED FROM HOLDER.

(A) DIMENSIONS IN INCHES. TOLERANCES - UNLESS OTHERWISE SPECIFIED - DECIMALS: + 0.001, FRACTIONS: 1/32.

• USE A DUMMY FUSE IN PERFORMING THIS TEST.

This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by all Navy activities. All other military activities are required to employ this standard where suitable.

P.A. NAVY-BUWEP Other Cost	TITLE	MILITARY STANDARD
	FUSEHOLDER - CARTRIDGE, EXTRACTOR POST (A)	MS26572(WEP)
PROCUREMENT SPECIFICATION MIL-F-19207	SUPERSEDES:	SHEET OF
	NAF STD 1357	

DD FORM 672-1 (Limited coordination)  
SEP 57

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 30 Nov 1960  
REVISED (A) 15 Aug 1962