


NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement transaction of the United States Government, thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished such data in any way supports the said drawings, specifications, or other data, nor is as regarded by implication or otherwise in any manner increasing the liability of any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

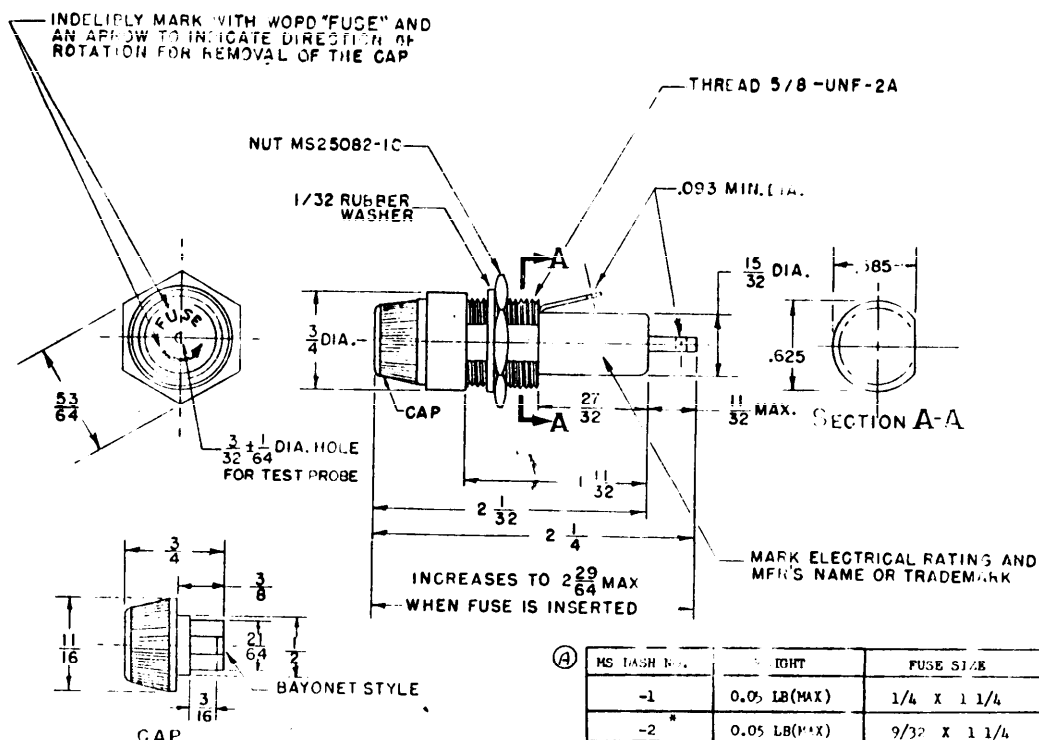

NOTES AND SPECIFICATIONS

MATERIALS: - CONTACTS: BRASS OR BERYLLIUM COPPER; TERMINALS: BRASS OR PHOSPHOR BRONZE; BODY & CAP: MOLDED PLASTIC.
FINISH: - ELECTRICAL CONTACTS: BRIGHT ALLOY PLATED; TERMINALS: HOT SOLDER DIPPED.
ELECTRICAL RATING: - CURRENT: 0-15 AMP; VOLTS: 0-250; FUSES PER MIL-P-15160.

FUSEHOLDER MUST MEET THE FOLLOWING SPECIFICATIONS: (1) VOLTAGE DROP: 20 MV(MAX) WITH 15 AMPERES WHILE BEING SUBJECTED TO VIBRATION PER PROCEDURE I OF MIL-E-5272. (2) DIELECTRIC: 1250 VOLTS (RMS) 60 CYCLES PER 1 MINUTE BETWEEN TERMINALS AND BETWEEN TERMINALS AND MOUNTING PANEL. (3) SALT SPRAY: 100 HOURS PER MIL-E-5272. (4) RIP PROOF: AS SPECIFIED IN MIL-STD-883. (5) TORQUE: METAL INSERT IN CAP - 36 POUND-INCHES WITH NO LOOSENING. (6) MOUNTING: SINGLE HOLE, 5/8 DIAMETER, FOR PANELS UP TO 5/16 THICK. (7) SCREW THREADS: PER NIS HANDBOOK H-28, SEC. IV. (8) SPACING BETWEEN RESPECTIVE CONTACTS MEASURED LONGITUDINALLY ALONG THE INTERIOR WALL - 1/32 (MIN). (9) CONSTRUCTION DETAILS OPTIONAL EXCEPT THAT ALL CAPS MUST BE COMPLETELY INTERCHANGEABLE ON ANY FUSEHOLDER.

(ALL ABOVE TESTS TO BE PERFORMED ON A SINGLE FUSEHOLDER)

- (A) CAP MUST RETAIN FUSE WHEN REMOVED FROM HOLDER.

DIMENSIONS IN INCHES. TOLERANCES - UNLESS OTHERWISE SPECIFIED - DECIMALS: + 0.004, FRACTIONS: 1/32.

* USE A DIMMY WISE IN PERFORMING THIS TEST.

This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by all other military activities as required to employ this standard where suitable.

P.A. NAVY-BUWEP Other Cost	TITLE FUSEHOLDER- CARTRIDGE, EXTRACTOR POST (A)	MILITARY STANDARD
	PROCUREMENT SPECIFICATION MIL-F-19207	MS26572 (WEP)
SUPERSEDES: NAF STD 1357		SHEET OF

DD FORM 672-1 (Limited coordination)
SEP 57

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE