


FED SUP CLASS  
5330


USER ACTIVITIES

REVIEW ACTIVITIES  
USAF 11 IS  
Navy AS  
Army ME

DSA - IS

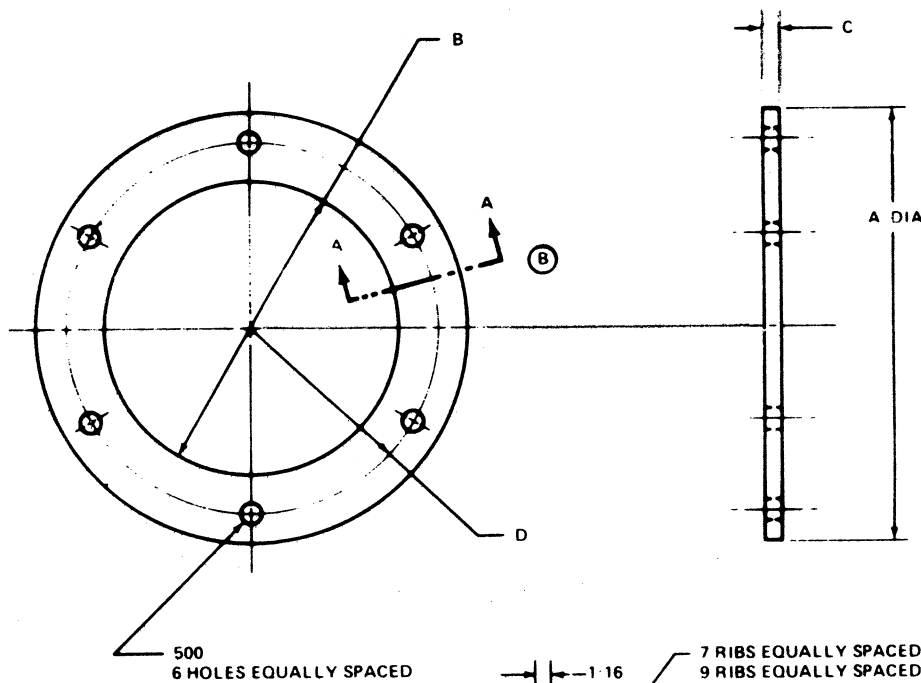

DASH NO	A MAX DIA	B DIA	C +.050 -.000	D +.005 RAD
-1	12.000	8.125	.125	5.125
-2	17.375	12.375	.125	7.125
-3	12.000	8.125	.125	5.125
-4	17.375	12.375	.125	7.125

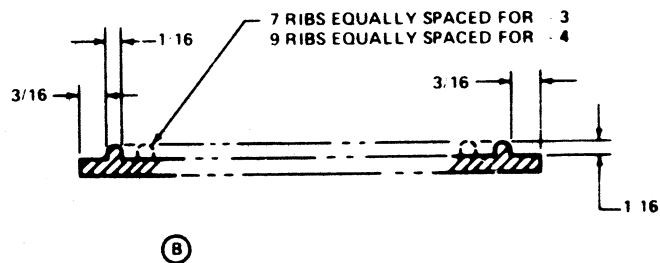SECTION A - A  
RIB DESIGN FOR -3 AND -4.

- (B) MATERIAL HEAT RESISTANT SILICONE RUBBER, CLASS IIa, GRADE 60, PER ZZ R 765

MINIMUM MARKING MS PART NO. AND MANUFACTURER'S NAME, ABBREVIATION OR TRADE MARK PER MIL STD 130.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS - .031, FRACTIONS - 1/64.

MS26577 FOR USE WITH MS24526 BASE

- (B) DASH 1 AND DASH 2 INACTIVE FOR NEW DESIGN

INTERCHANGEABILITY RELATIONSHIP MS26577 1 PARTS SUPERSEDE AN2510 1 PARTS AND ARE UNIVERSALLY, FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

(B) 6 Oct 71

(B) 23 Mar 66

(A) REVISED

APPROVED 6 May 64

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A. USAF - 82

Other Cust

Navy AS  
Army ME

(B)

TITLE

GASKET AIRPORT MARKER LIGHT BASE

MILITARY STANDARD

MS26577

PROCUREMENT SPECIFICATION

SUPERSEDES AN2510

SHEET 1 OF 1