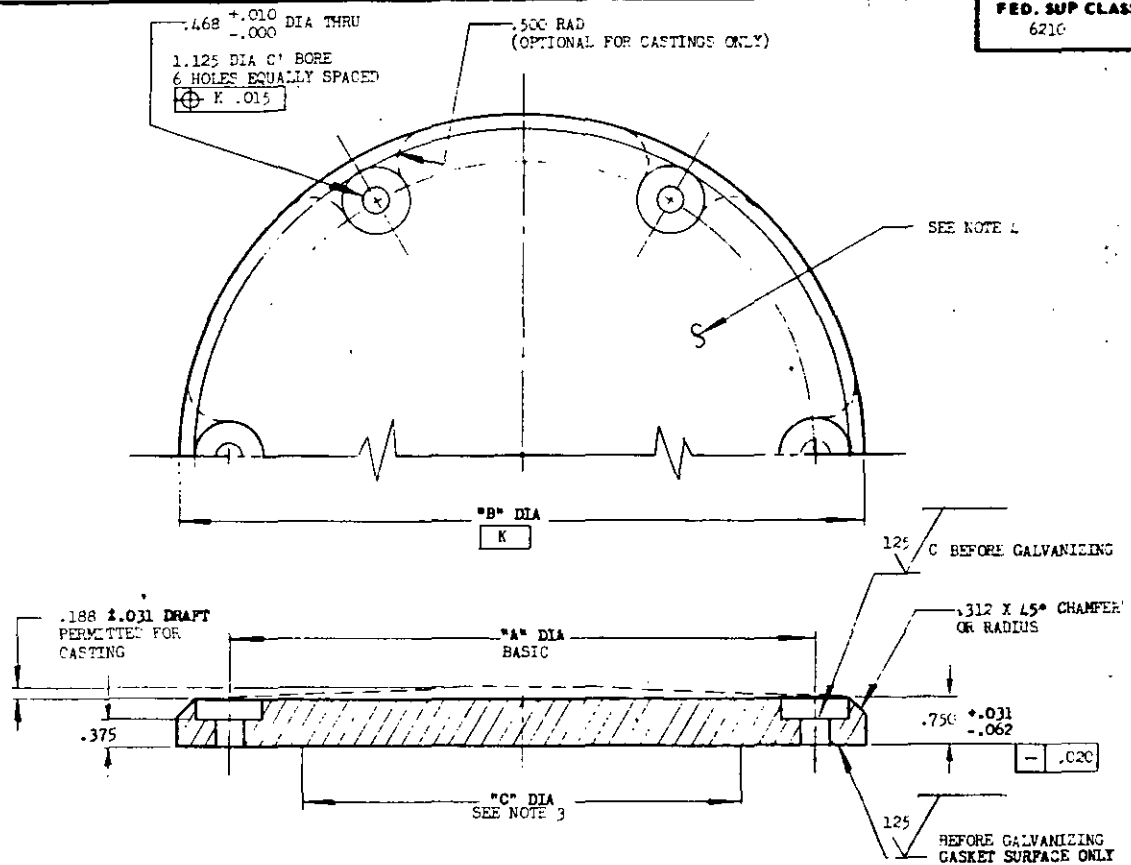


FED. SUP CLASS
6210

DASH NO	"A" DIA	"B" DIA	"C" DIA
-1	10.250	12.000	7.500
-2	14.250	17.375	11.750

1. MATERIAL: STEEL, PLATE, OR CAST, MUST WITHSTAND A COMPRESSION LOAD OF 100,000 LBS WHEN TESTED PER PROCUREMENT SPECIFICATION.
2. FINISH: GALVANIZED SEE PROCUREMENT SPECIFICATION.
3. SURFACE ROUGHNESS AS FABRICATED UNLESS OTHERWISE SPECIFIED. REMOVE ALL BURRS AND SHARP EDGES.
4. MINIMUM MARKING TO BE PERMANENTLY MARKED ON TOP OF ASSEMBLY: MS PART NO. AND MANUFACTURER'S NAME, ABBREVIATION OR TRADEMARK.
5. THIS BASE PLATE IS SUPPLIED WITH 6 3/8 -16 UNC-2A BOLTS, 6 MS21205 WASHERS, AND 1 MS26577 GASKET.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .010$, ANGLES $\pm 0^\circ 45'$.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) ENTIRE STANDARD REVISED. (B) CANCELLED AFTER 24 MARCH 82 NO SUPERSEDING STANDARD.

P.A. USAF-11 Other Cust Navy-AS	TITLE COVER, AIRPORT MARKER LIGHT BASE, BLANK	MILITARY STANDARD MS26580(ASG)
PROCUREMENT SPECIFICATION MIL-B-8954	SUPERSEDES: AN2511	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Review activities:

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

U.S. GOVT. REPRODUCTION

APPROVED 9 Mar 66 REVISED A 11 Sept 68 B 24 MAR 82