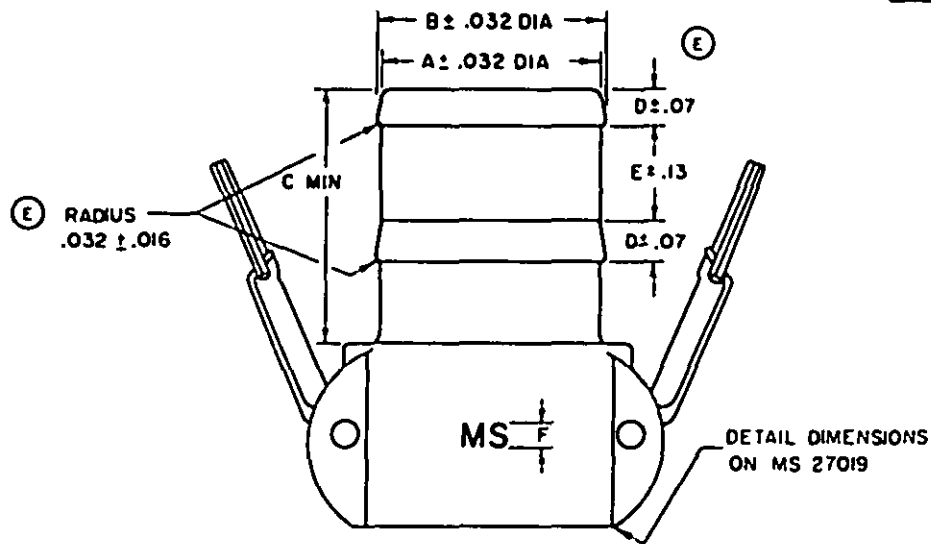


FED. SUP CLASS
4730

DASH NUMBER	CLASS NUMBER		NOM. SIZE	DIMENSIONS						GASKET REQD
	CLASS 1	CLASS 2		A	B	C	D	E	F	
-1	I		1/2	.484	.594	1.313	.188	.469	.125	MS27030-1
-2		I								
-3	I		3/4	.734	.844	2	.25	.75	.125	MS27030-2
-4		I								
-5	I		1	.984	1.078	2.25	.375	.75	.125	MS27030-3
-6		I								
-7	I		1-1/4	1.234	1.344	2.25	.375	.813	.25	MS27030-4
-8		I								
-9	I		1-1/2	1.484	1.594	2.375	.375	.813	.25	MS27030-5
-10		I								
-11	I		2	1.969	2.094	2.75	.375	1.125	.25	MS27030-6
-12		I								
-13	I		2-1/2	2.484	2.676	3.125	.438	1.375	.25	MS27030-7
-14		I								
-15	I		3	2.969	3.125	4	.5	1.563	.25	MS27030-8
-16		I								
-17	I		4	3.469	4.125	4.25	.5	1.75	.25	MS27030-9
-18		I								
-21	I		6							MS27030-10
-22		I								

SEE SHEET 2

(E) DENOTES CHANGE

USM ACTIVITIES:
ARMY - AT
NAVY - MC

USM ACTIVITIES:
ARMY - CL, FY
AIR FORCE - 87
ULA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. ARMY-ME Other Cost NAVY-YD A F - 99	INTERNATIONAL INTEREST STANAG NO. 2761 OASIS 240	TITLE COUPLING HALF, QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, HOSE SHANK, TYPE III	MILITARY STANDARD MS 27025
PROCUREMENT SPECIFICATIONS MIL-C-27487	SUPERSEDES:	SHEET 1 OF 2	

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

4730-0603

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 23 SEPTEMBER 1960 REVISED 4 AUGUST 1964 19 FEBRUARY 1970 16 JULY 1980 4 OCTOBER 1985

