

INCH-POUND


MS27067C
 24 September 2003
 SUPERSEDING
 MS27067B
 30 June 1972

DETAIL SPECIFICATION SHEET

ELBOW SUBASSEMBLY, FLARED, 45° FORGED, SWIVEL NUT

This specification is approved for use by all Departments
 and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
 shall consist of this specification and MIL-DTL-27272.

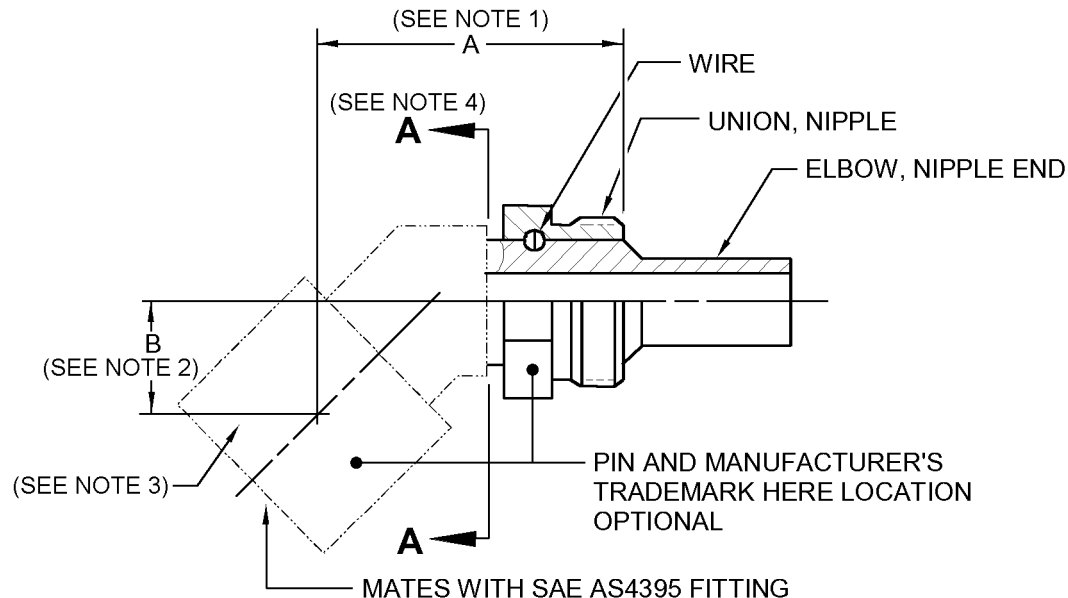

NOTES:

1. Dimension A is measured between the hose end of the threaded section of the union and the free end of the insert at its centerline.
2. Dimension B is measured between the centerline of the nipple and the free end of the insert at its centerline.
3. If required, lockwire holes to be drilled in accordance with SAE AS1043 and suffix L added to Part or Identifying Number (PIN) (e.g., MS27067-4CL).
4. Any forged design of subassembly components to the left of plane A-A is acceptable provided that requirements of this specification sheet and the procurement specification are met.

FIGURE 1. Elbow subassembly illustration.

MS27067C

REQUIREMENTS

Intended use. This part is a component of MS27059.

Identification of product. The PIN and the manufacturer's trademark shall be permanently marked on the assembly. The PIN for this part shall be as specified in table I (e.g., MS27067-4C).

Dimensions. Dimensions are in inches.

Material. PIN suffix C, corrosion-resistant steel.

PIN suffix D: Aluminum alloy.

No PIN suffix: Combination of aluminum alloy and corrosion-resistant steel.

See applicable specification sheet for other components identified in table I for their material requirements.

Finish. Corrosion-resistant steel, do not passivate.

Aluminum alloy: Anodize in accordance with MIL-A-8625, type II, dye blue.

Elbow subassembly illustration. See figure 1.

Order of precedence. This specification takes precedence over the documents referenced herein. Unless otherwise specified, referenced documents shall be of the issue in effect on the date of solicitation.

TABLE I. Elbow subassembly composition.

| PIN <u>1/</u> | Wire PIN | Union, nipple PIN | Elbow, nipple end PIN | A <u>2/</u> ±.020 | B <u>3/</u> ±.020 |
|------------------|-------------|----------------------|-----------------------------|----------------------|----------------------|
| MS27067 | MS27072 | MS27071 | MS27087 | | |
| -3/-4C <u>4/</u> | -4C | -4C | -3/-4C | 1.078 | .283 |
| -4C | | | -4C | 1.117 | .322 |
| -5C | -5C | -5C | -5C | 1.150 | .340 |
| -6C | -6C | -6C | -6C | 1.224 | .389 |
| -8C | -8C | -8C | -8C | 1.720 | .465 |
| -8 | | | -8D | | |

1/ If required, lockwire holes to be drilled in accordance with SAE AS1043 and suffix L added to PIN (e.g., MS27067-4CL).

2/ Dimension A is measured between the hose end of the threaded section of the union and the free end of the insert at its centerline.

3/ Dimension B is measured between the centerline of the nipple and the free end of the insert at its centerline.

4/ Swivel nut and sealing surface of this elbow subassembly shall mate with AS4395-3 fitting. The remaining portion of the subassembly shall mate with M27267-4 hose.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

MS27067C

CONCLUDING MATERIAL

Custodians:

Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:

DLA - CC

(Project 4730-0868-039)

Review activities:

Army - AR, AT, MI
Navy - MC, SA, SH
Air Force -71