


LIST OF THIS  
ISSUE OF THE

RE REQUIREMENTS FOR ACCURRING THE PRODUCT(S) DESCRIBED HEREIN SHALL  
SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN  
ODDSS SPECIFIED IN THE SOLICITATION. MIL-T-27535


ON IS APPROVED FOR USE BY all Departments and Agencies  
ment of Defense.

THIS SPECIF  
of the L

Form Approved  
OMB No 0704-0188

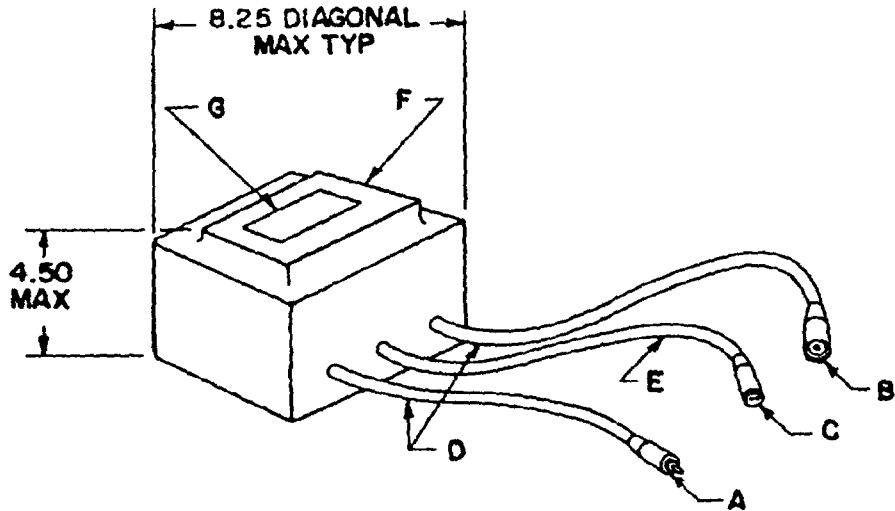

Ⓒ ENVELOPE OPTION 1

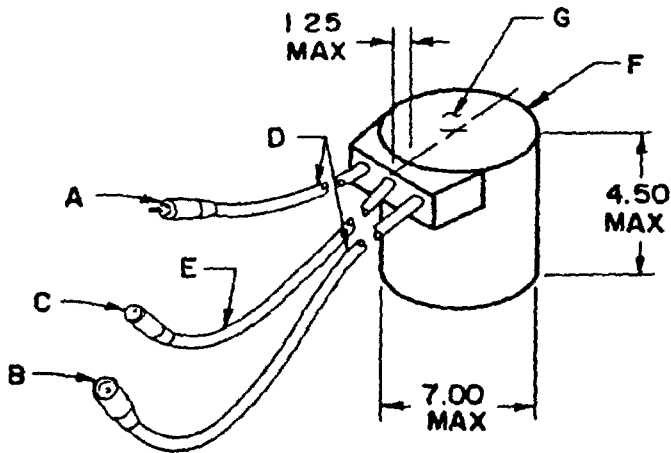

Ⓒ ENVELOPE OPTION 2

Ⓑ Denotes Changes

PREPARING ACTIVITY Air Force-85  
CUSTODIANS ARMY NAVY  
AIR FORCE 85 DLA  
Navy-AS, YD  
REVIEW Air Force-99, 11, DLA-ES  
USER  
PROJECT NUMBER 5950-0759

TITLE  
MILITARY SPECIFICATION SHEET  
TRANSFORMER, POWER,  
ISOLATION; AIRPORT LIGHTING,  
300W/6 6A/6 6A/5000V

SPECIFICATION SHEET NUMBER  
MS27134B 15 Nov 1990  
SUPERSEDING  
MS27134A 18 Aug 1965  
AMSC N/A FSC 5950

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Page 1 of 2

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-T-27535

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved  
OMB No 0704 0188

ELECTRICAL CHARACTERISTICS					
PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS	LOAD
6 6	95	90		6.53-6 67	7 2 OHMS (a)
6 6				6.6 -7 1	SHORT CIRCUITED
6 6			135	0	OPEN CIRCUITED
5 2				5 1 -5 4	5 9 OHMS (a)
4 1				4 0 -4 3	4 8 OHMS (a)
3.4				3 3 -3 6	4 2 OHMS (a)
2 8				2 7 -3.0	3.8 OHMS (a)

(a) THE LOAD MAY BE EITHER A 300W, 6.6A LAMP OR THE OHMIC RESISTANCE SPECIFIED

- A PLUG FIGURE 6a FAA SPECIFICATION L-823
- B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823
- C. RECEPTACLE AS SPECIFIED IN TABLE
- D PRIMARY CABLE (SEE TABLE)
- E SECONDARY CABLE (SEE TABLE)
- F. CASE.
- G IDENTIFICATION MARKING (LOCATION OPTIONAL).

PART NO.	C	LEAD LENGTH INCHES	
		D	E
MS27134-1	FIG 1b FAA SPEC L-823	18 <sup>+3</sup> <sub>-1</sub>	12 <sup>+3</sup> <sub>-1</sub>
MS27134-2	FIG 1c FAA SPEC L-823	30 <sup>+3</sup>	54 <sup>+3</sup>

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES

MAXIMUM WEIGHT 20 POUNDS.

DIMENSIONS IN INCHES

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

PREPARING ACTIVITY Air Force-85 CUSTODIANS ARMY NAVY- AIR FORCE 85 DLA- Navy-AS, YD REVIEW Air Force-99, 11, DLA-ES USER PROJECT NUMBER 5950-0759	MILITARY SPECIFICATION SHEET TITLE TRANSFORMER, POWER, ISOLATION AIRPORT LIGHTING, 300W/6.6A/6.6A/5000V	SPECIFICATION SHEET NUMBER <b>MS27134B</b> SUPERSEDING MS27134A 18 Aug 1965 AMSC N/A FSC 5950
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.		Page 2 of 2