


FED. SUP CLASS  
5945User activities: Army.  
Navy  
Air ForceReviewer activities: Army  
Navy  
Air Force  
EC  
II

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

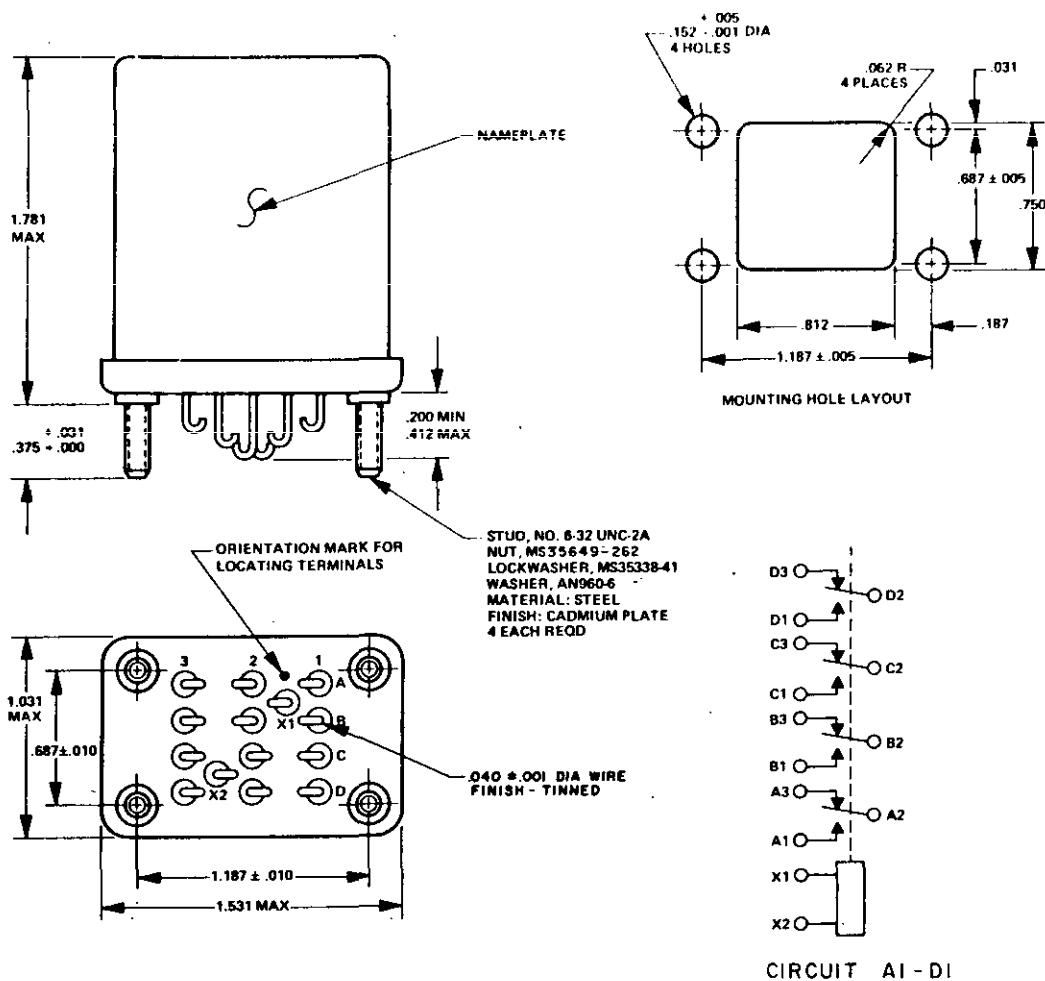

The use of diodes on ac relays is optional. Actual application must be shown on label.

C CANCELED WITHOUT REPLACEMENT

MS PART NUMBER	TYPE	COIL	TERMINAL TYPE	MOUNTING OR MATING SOCKET	MAX WEIGHT IN POUNDS
MS27218-01	I	DC	SOLDER HOOK	STUD	0.35
MS27218-A1	I	AC	SOLDER HOOK	STUD	0.35

C DENOTES CHANGE

P.A. USAF - 85 Other Cust NAVY - AS	International interest	TITLE RELAY, 5 AMP, 4 PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED, MULTI-PHASE	MILITARY STANDARD <b>MS 27218</b>
Procurement Specification MIL - R - 6106	SUPERSEDES:	SHEET   OF	

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5945-0569

APPROVED 17 OCT 63 REVISED 3 NOV 1975 6 APR 81