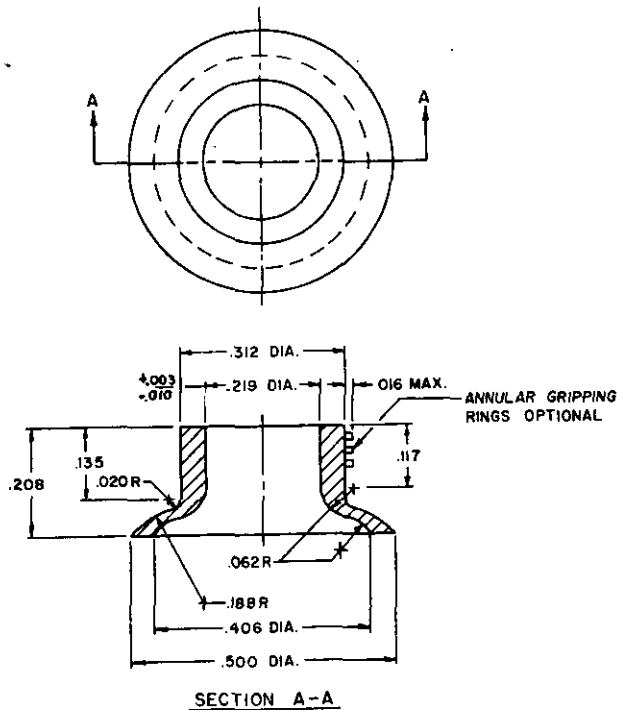


FED. SUP CLASS  
5925

- A. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED. TOLERANCE  $\pm .010$
- B. MATERIAL - SILICONE RUBBER, SPEC. 22-R-765, CLASS III, GRADE 50, (B) SHALL BE CLEAR TO THE EXTENT THAT WHITE BAND OF CIRCUIT BREAKER ACTUATOR IS VISIBLE.
- C. SHIELD SHALL NOT TEAR OR CHANGE SHAPE AS A RESULT OF PASSING OVER A 7/16 INCH DIA STEEL PIN.
- D. SHIELD SHALL SEAT AGAINST THREADED MOUNTING BUSHING OF MS25244 BREAKER AND AGAINST ACTUATOR COLLAR OF MS25017 BREAKER.
- E. SHIELD SHALL NOT RESTRICT BREAKER ACTUATOR MOVEMENT TO TRIPPED POSITION.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.  
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

© CANCELED AFTER 27 APRIL 1978

P.A. B5 Other Cust	TITLE <b>SHIELD, CIRCUIT BREAKER</b>	MILITARY STANDARD <b>MS27220(USAF)</b>
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET   OF

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

\*U.S. GOVERNMENT PRINTING OFFICE: 1978-703-122/2491

APPROVED 16 MARCH 1964 REVISED (A) 15 DECEMBER 1965 (B) 18 MARCH 1968 (C) 27 APRIL 1978

Revised  
User

This has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DD158."