



FED. SUP CLASS
5945

INACTIVE FOR NEW DESIGN AFTER 5 JUN 87
 NO SUPERSEDING STANDARD
 FOR NEW DESIGN USE MS27401

User activities: Army -
 Navy -
 Air Force -

Review activities: Army -
 Navy - AS
 Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

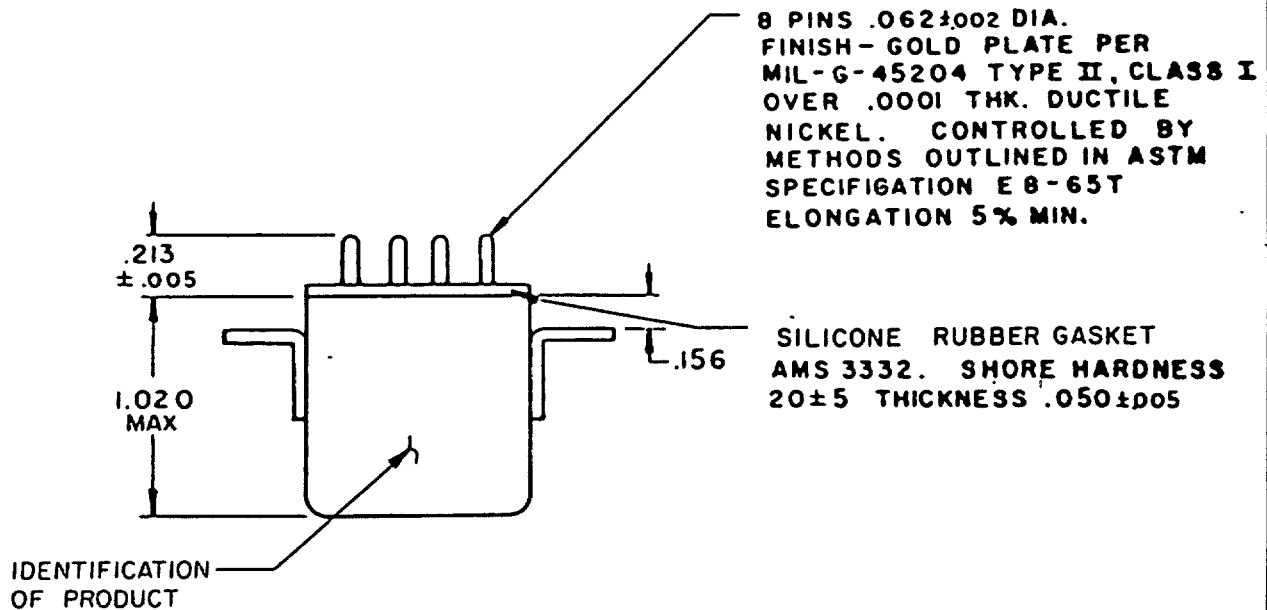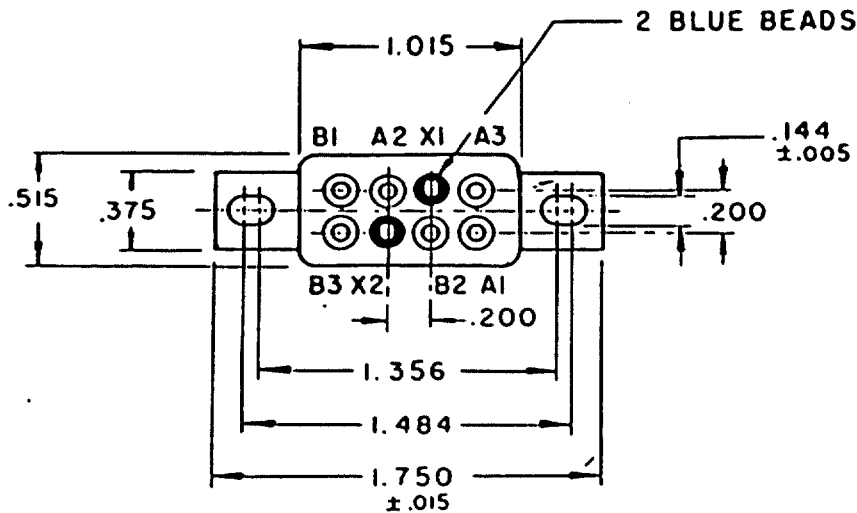

DASH NUMBERS 1, 2, AND 3

(K) denotes changes

APPROVED 10 Aug 1964 REVISED (J) 5 JUN 87 (K) 10 FEB 89

P.A. USAF - 85 Other Cust Navy - EC	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2PDT, TYPE I, HERMETICALLY SEALED	MILITARY STANDARD MS27247
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 1 OF 6

DD FORM 672
 1 MAY 73
 AMSC N/A

(Coordinated) previous editions of this form are obsolete.



5945-0798-04

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
5945User activities:
Army -
Navy -
Air Force -Review activities:
Army - AS
Navy -
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

11, 99

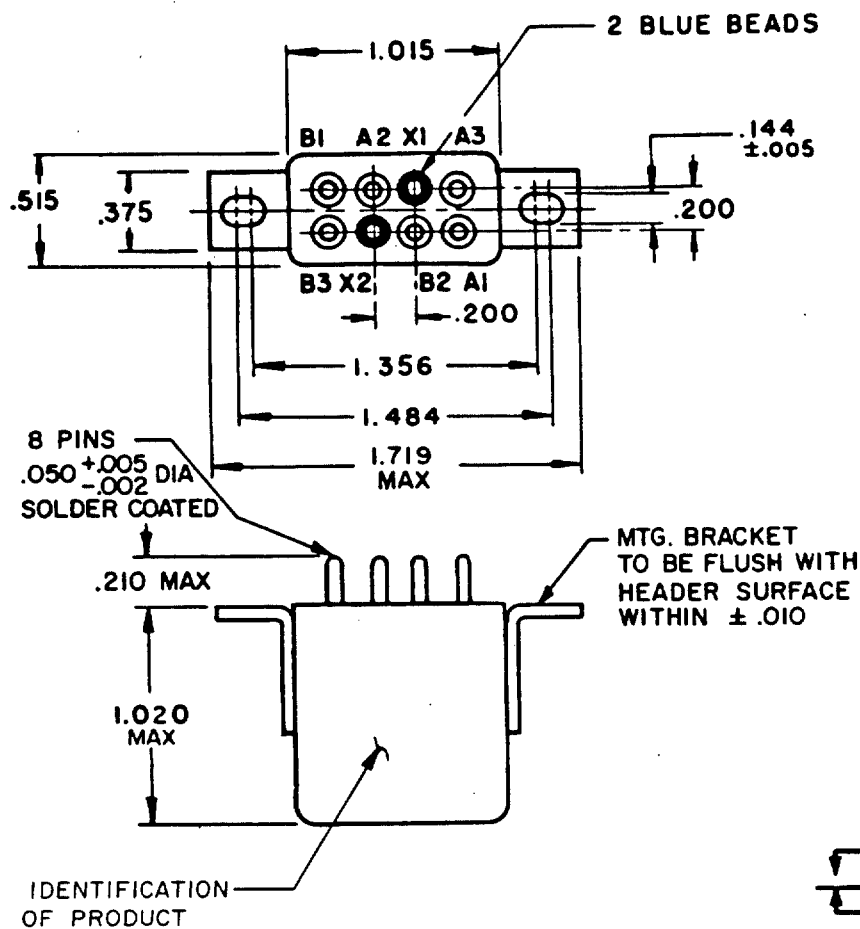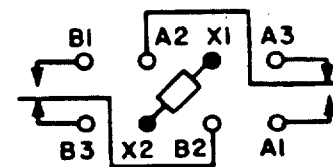DASH NUMBERS 4 AND 5CIRCUIT DIAGRAM

For changes see pages 4 and 6

REVISED

10 Aug 1964

APPROVED

P.A USAF - 85 Other Cust Navy - EC	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2PDT, TYPE I, HERMETICALLY SEALED	MILITARY STANDARD
			MS 27247
Procurement Specification MIL-R-6106		SUPERSEDES:	PAGE 2 OF 6

DD FORM
1 MAY 73

672

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

User activities: Army -
Navy -
Air Force -Review activities: Army -
Navy - AS
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Inches	mm	Inches	mm
.0001	0.025	.210	5.33
.002	0.05	.213	5.41
.005	0.13	.375	9.52
.010	0.25	.515	13.08
.015	0.38	1.000	25.40
.050	1.27	1.015	25.78
.062	1.57	1.356	34.44
.144	3.66	1.484	37.69
.156	3.96	1.719	43.66
.200	5.08	1.750	44.45

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.010 (0.25 mm).
4. Terminal numbers need not appear on relay headers provided there is affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.
5. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

TABLE 1. Dash numbers and characteristics.

Dash number	Type	Coil	Terminal type	115/200 V ac 3 phase contact rating	Mounting or mating socket	Max weight in pounds
MS27247-						
1	I	dc	Plug-in	N/A	N/A	.08
2	I	dc	Plug-in	Applicable	N/A	.08
3	IER	dc	Plug-in	Applicable	N/A	.08
4	I	dc	Printed wire (PW)	N/A	N/A	.08
5	I	dc	Printed wire (PW)	Applicable	N/A	.08

P.A USAF - 85	International Interest	TITLE RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2PDT, TYPE I, HERMETICALLY SEALED	MILITARY STANDARD
Other Cust Navy - EC			MS27247
Procurement Specification MIL-R-6106	SUPERSEDES:		PAGE 3 OF 6

User activities: Army -
Navy -
Air Force -Review activities: Army -
Navy - AS
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

(K) TABLE II. Operating characteristics.

IMS part no.	Coil data											Time (milliseconds-maximum)					
	Coil	Nominal		Max		Max pick-up voltage			Hold voltage $\frac{2}{2/}$	Drop-out voltage $\frac{2}{2/}$	Operate $\frac{3}{3/}$	Release $\frac{4}{4/}$	Contact bounce				
		Volts $\frac{1}{1/}$	Freq. Hz	Res Ω $\pm 10\%$	Volts	Amperes	Normal $\frac{2}{2/}$	High temp test					Cont current test	Main	Aux		
MS27247-1	dc	28	dc	300	29	.120	18	18	19.8	7	1	10	2	5			
MS27247-2	dc	28	dc	300	29	.120	18	18	19.8	7	1	10	2	5			
MS27247-3	dc	28	dc	300	29	.120	18	18	19.8	7	1	10	2	5			
MS27247-4	dc	28	dc	300	29	.120	18	18	19.8	7	1	10	2	5			
MS27247-5	dc	28	dc	300	29	.120	18	18	19.8	7	1	10	2	5			

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.

2/ Over the temperature range.

3/ With nominal coil voltage.

4/ From nominal coil voltage.

P.A
USAF - 85
Other Cust
Navy - ECInternational
interest

TITLE

RELAYS, ELECTROMAGNETIC, 10 AMPERES,
2PDT, TYPE I, HERMETICALLY SEALED

MILITARY STANDARD

MS27247

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 4 OF 6

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 10 Aug 1964 REVISED (K) For changes see pages 4 and 6

User activities: Army -
Navy -
Air Force -Review activities: Army - AS
Navy -
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles X 10 ³ 2/	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 2/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	10	10			10				10				
Inductive	100	4	4			4				4				
Inductive 1/ (-5 only)														
Motor	100	3	3			3				3				
Lamp	100	2	2			2				2				
Transfer load														3/
Mechanical life reduced current	400	2.5	2.5											
Intmd current														4/

1/ Addition rating for -5 only: 2 ampere inductive at 460 V ac, 400 Hz.

2/ 115/200 V ac for 60 Hz ratings, absence of value indicates relay is not rated for 3 phase applications.

3/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

4/ Minimum current ratings 0.1 ampere resistive, 0.3 ampere inductive, and 0.5 ampere resistive are applicable in accordance with acquisition specification except monitored to 3 ohm contact resistance.

P.A.

USAF - 85

Other Cust

Navy - EC

International
Interest

TITLE

RELAYS, ELECTROMAGNETIC, 10 AMPERES,
2PDT, TYPE I, HERMETICALLY SEALED

MILITARY STANDARD

MS27247

Procurement Specification
MIL-R-6106

SUPERSEDES:

PAGE 5 OF 6

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 10 Aug 1964 REVISED (K) For changes see pages 4 and 6

User activities: Army - AS
Navy -
Air Force - 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:

Environmental characteristics

Temperature range -70°C to +125°C
Max altitude rating 80,000 ft
Shock G-level 50 G
Duration 11 ms
Max duration contact opening 10 µs
Vibration - sinusoidal
G-level 20 G
Frequency range 10 - 2,000 Hz
Acceleration 15 G

Electrical characteristics

Insulation resistance, Initial 100 megohms
After life or environmental tests 50 megohms

Dielectric strength (sea level)

	Initial	After life tests
Coil to case	1,000 V rms	1,000 V rms
Aux contacts		
All other points	1,250 V rms	1,000 V rms

Dielectric strength (altitude)

Coil to case	80,000 ft 350 V rms
Aux contacts	
All other points	350 V rms

Max contact drop Initial 0.150 volt
After life test 0.175 volt

Overload current 20 amperes, 28 V dc

Rupture current 40 amperes, 115 V ac, 400 Hz

Duty rating Continuous

RFI specification MIL-STD-461
(Applicable to coil circuits of ac operated relays)

Quality conformance inspection

Performance of groups B and C tests are not applicable.

(K)

Group A acceptance reports shall be submitted to the qualifying activity on a yearly basis in order to retain qualification for this military standard sheet.

P.A USAF - 85 Other Cust Navy - EC	International interest	TITLE RELAYS, ELECTROMAGNETIC, 10 AMPERES, 2PDT, TYPE I, HERMETICALLY SEALED	MILITARY STANDARD
Procurement Specification MIL-R-6106		SUPERSEDES:	MS27247
			PAGE 6 OF 6