

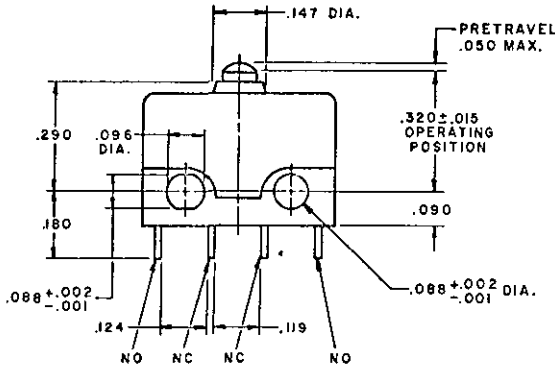
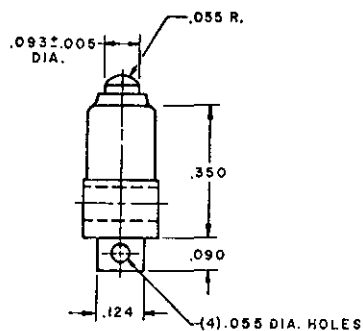


Custodian: Air Force - 85
 Reviewer: Air Force - 85
 "Reviewer/User Information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS"

This standard has been approved by the AFM, Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS 5930																					
	 <p style="text-align: center;">CIRCUIT DIAGRAM</p>																				
																					
<p>DETAIL REQUIREMENTS:</p> <table style="width: 100%;"> <tr> <td style="width: 50%;">(A) CONTACT ARRANGEMENT</td> <td>SPDT</td> </tr> <tr> <td>(B) ACTUATING FORCE</td> <td>8 OZ. MAX.</td> </tr> <tr> <td>(C) RELEASE FORCE</td> <td>1.5 OZ. MIN.</td> </tr> <tr> <td>(D) PRETRAVEL</td> <td>.050 MAX.</td> </tr> <tr> <td>(E) MOVEMENT DIFFERENTIAL</td> <td>.010 MIN.</td> </tr> <tr> <td>(F) OVERTRAVEL</td> <td>.004 MIN.</td> </tr> <tr> <td>(G) MINIMUM OPERATING CYCLES</td> <td>25,000 CYCLES</td> </tr> <tr> <td>(H) MAXIMUM WEIGHT</td> <td>.003 LB.</td> </tr> <tr> <td>(I) STRENGTH OF PUSHBUTTON AND PUSHBUTTON STOP</td> <td>25 LB.</td> </tr> <tr> <td>(J) STRENGTH OF TERMINALS</td> <td>9 LB.</td> </tr> </table>		(A) CONTACT ARRANGEMENT	SPDT	(B) ACTUATING FORCE	8 OZ. MAX.	(C) RELEASE FORCE	1.5 OZ. MIN.	(D) PRETRAVEL	.050 MAX.	(E) MOVEMENT DIFFERENTIAL	.010 MIN.	(F) OVERTRAVEL	.004 MIN.	(G) MINIMUM OPERATING CYCLES	25,000 CYCLES	(H) MAXIMUM WEIGHT	.003 LB.	(I) STRENGTH OF PUSHBUTTON AND PUSHBUTTON STOP	25 LB.	(J) STRENGTH OF TERMINALS	9 LB.
(A) CONTACT ARRANGEMENT	SPDT																				
(B) ACTUATING FORCE	8 OZ. MAX.																				
(C) RELEASE FORCE	1.5 OZ. MIN.																				
(D) PRETRAVEL	.050 MAX.																				
(E) MOVEMENT DIFFERENTIAL	.010 MIN.																				
(F) OVERTRAVEL	.004 MIN.																				
(G) MINIMUM OPERATING CYCLES	25,000 CYCLES																				
(H) MAXIMUM WEIGHT	.003 LB.																				
(I) STRENGTH OF PUSHBUTTON AND PUSHBUTTON STOP	25 LB.																				
(J) STRENGTH OF TERMINALS	9 LB.																				
<p>(K)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">RATED LOAD</th> <th style="text-align: center;">CURRENT CAPACITY 28 VOLTS DC</th> </tr> </thead> <tbody> <tr> <td>RESISTIVE</td> <td>8 AMP.</td> </tr> <tr> <td>INDUCTIVE (50,000 FT.)</td> <td>3 AMP.</td> </tr> <tr> <td>MOTOR</td> <td>5 AMP.</td> </tr> </tbody> </table>		RATED LOAD	CURRENT CAPACITY 28 VOLTS DC	RESISTIVE	8 AMP.	INDUCTIVE (50,000 FT.)	3 AMP.	MOTOR	5 AMP.												
RATED LOAD	CURRENT CAPACITY 28 VOLTS DC																				
RESISTIVE	8 AMP.																				
INDUCTIVE (50,000 FT.)	3 AMP.																				
MOTOR	5 AMP.																				
<p style="text-align: center;">DIMENSIONS: IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010</p> <p style="text-align: center;">FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.</p> <p style="text-align: center;">REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.</p>																					
P.A. AIR FORCE 65 Other Cust	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 40%; text-align: center; vertical-align: top;"> TITLE SWITCH, SENSITIVE, SUB-SUB-MINIATURE </td> <td style="width: 60%; text-align: center; vertical-align: top;"> MILITARY STANDARD MS27257(USAF) </td> </tr> <tr> <td style="padding: 5px;"> PROCUREMENT SPECIFICATION MIL-S-6743 </td> <td style="padding: 5px;"> SHEET 1 OF 1 </td> </tr> </table>	TITLE SWITCH, SENSITIVE, SUB-SUB-MINIATURE	MILITARY STANDARD MS27257(USAF)	PROCUREMENT SPECIFICATION MIL-S-6743	SHEET 1 OF 1																
TITLE SWITCH, SENSITIVE, SUB-SUB-MINIATURE	MILITARY STANDARD MS27257(USAF)																				
PROCUREMENT SPECIFICATION MIL-S-6743	SHEET 1 OF 1																				

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5930-F230-17