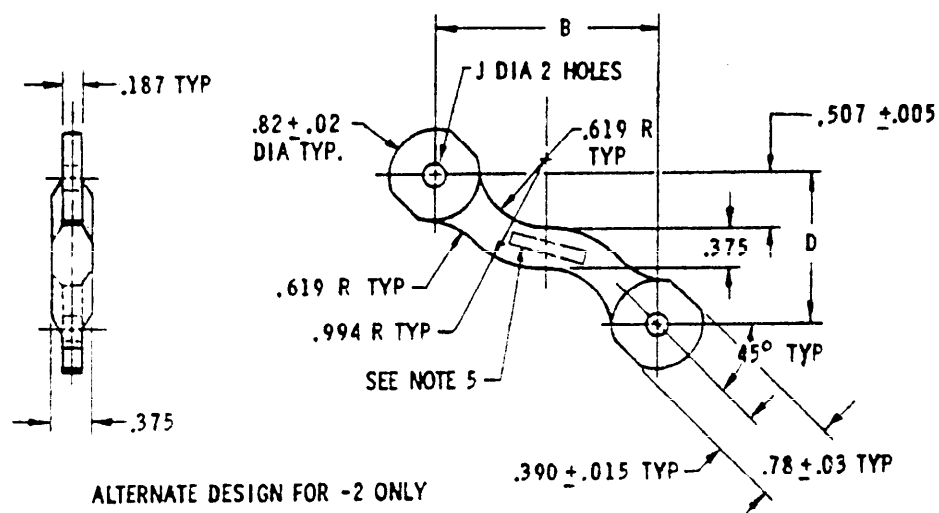
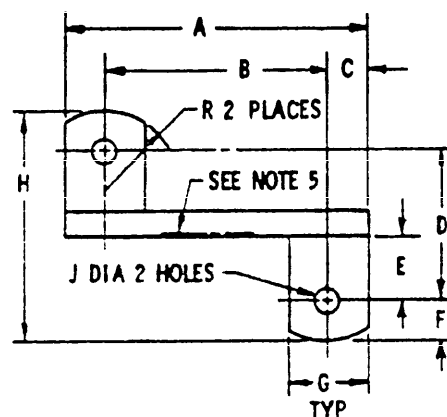



FED. SUP CLASS
6140

DASH NO.	A	B	C	D	E	F	G +.031	H +.015	J +.005	K	L	M	R (rad) +.031
-1	2.125	1.625	.250	1.080	.478	.312	.500	1.704	.178	.125	.250	.062	.750
-2	2.790	2.040	.375	1.390	.570	.375	.750	2.140	.218	.250	.375	.125	

Notes:

1. Material - Copper, Specification QQ-C-502.
2. Remove all burrs and sharp edges.
3. Finish - Nickel Plate, Specification QQ-N-290, Type V.
4. Unless otherwise specified, dimensions are in inches, tolerances on decimals $\pm .010$, angles $\pm 5^\circ$.
5. Steel stamp part no. .005 deep min. using .125 high characters before plating.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.

(B) REDRAWN

and Agencies of the Department of Defense.

P. A.
Air Force-99
Other CustINTERNATIONAL
INTEREST

TITLE

CONNECTOR, BATTERY CELL, OFFSET

MILITARY STANDARD

MS27308 (99)

PROCUREMENT SPECIFICATION
MIL-B-26220

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

6140-F453

APPROVED 23 MAR 64 REVISED (A) 18 MAR 69 (B) 26 MAY 77