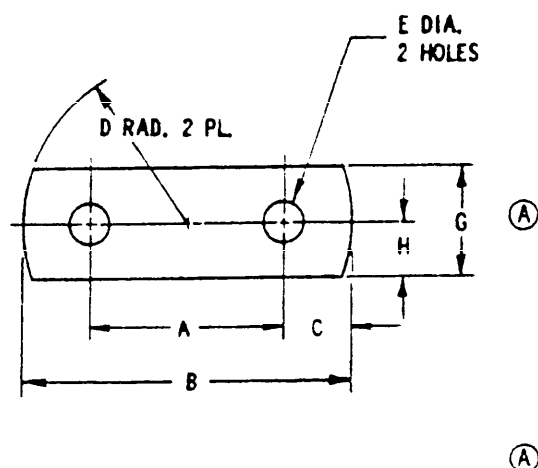


FED. SUP CLASS
6140

DASH NO.	DIMENSIONS							
	A	B	C	D	E	Thickness	G	H
(A) -1	±.015	±.015	±.015	±.062	±.010	±.010	±.031	±.010
(A) -2	.890	1.515	.312	.750	.178	.062	.500	.250
(A) -3	1.175	1.925	.375	.500	.218	.125	.750	.375
(A) -4	1.140	1.765	.312	.750	.178	.062	.500	.250
(A) -5	1.390	2.140	.375	.500	.218	.125	.750	.375
(A) -6	1.080	1.705	.312	.750	.178	.062	.500	.250
(A) -7	1.300	2.050	.375	.500	.218	.125	.750	.375
(A) -8	1.070	1.820	.375	.500	.218	.125	.750	.375

Notes:

1. Material: Copper, Specification QQ-C-520.
2. Finish: Nickel Plate, Specification QQ-N-290, Type V.
3. Dimensions in inches.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.

(A) REDRAWN

This military standard is approved for use by (Sacramento ALC MMIRE) Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

P A Air Force-99 Other Cost	INTERNATIONAL INTEREST	TITLE CONNECTOR, BATTERY CELL, STRAIGHT	MILITARY STANDARD MS 27309 (99)
PROCUREMENT SPECIFICATION MIL-B-26220	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 672-1 LIMITED COORDINATION

6140-F454

APPROVED 23 MAR 64 REVISED (A) 26 MAY 1977