


FED. SUP CLASS
5935User activities: Army -
Navy -
Air Force -Review activities: Army -
Navy -
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

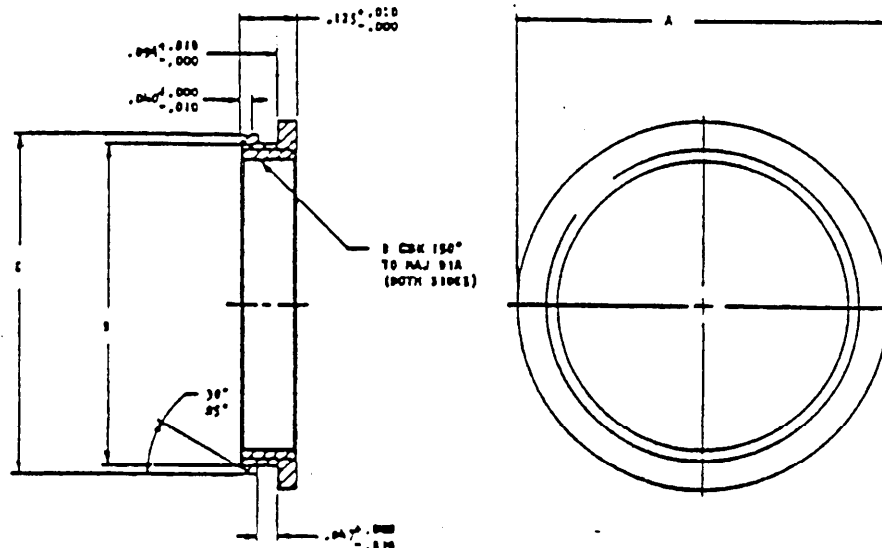


(B) CANCELED - FOR PROCUREMENT
USE MIL-C-85049/61

SHELL SIZE	A MAX DIA	B THREAD LINE CLASS 2B	C +.010 -.000 DIA	D +.010 DIA	
8	.59	7/16-28	.516	.476	-
10	.716	9/16-24	.647	.603	-
12	.846	1 1/16-24	.764	.726	-
14	.982	1 1/8-20	.892	.852	-
16	1.09	1 1/8-20	1.018	.978	-
18	1.234	1 1/8-18	1.143	1.103	-
20	1.394	1 1/2-18	1.262	1.222	-
22	1.569	1 1/2-18	1.392	1.352	-
24	1.754	1 1/2-18	1.516	1.476	-

NOTES:

- DIMENSIONS IN INCHES.
- MATERIAL: ALUMINUM ALLOY
- FINISH:
 - CADMIUM PLATED, NICKEL BASE
 - OLIVE DRAB, CADMIUM PLATED, NICKEL BASE



THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 28 Jan 66 REVISED (A) 10 Aug 66 (B) 22 Dec 87

P.A. USAF - 85 Other Cust	International Interest	TITLE RING, POTTING BOOT, ELECTRIC, CONNECTOR	MILITARY STANDARD MS27332
Procurement Specification MIL-C-27599		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 MAY 73 672

AMSC/NA

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3576

DISTRIBUTION STATEMENT A. - Approved for public release; distribution is unlimited.