

INCH - POUND

MS27334D  
 20 May 2005  
 SUPERSEDING  
 MS27334C  
 20 December 1967


## DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE,  
 SOLDER TYPE, BAYONET COUPLING, CLASSES P & T, SERIES II

This specification is approved for use by all Departments  
 and Agencies of the Department of Defense.

Inactive for new design after 7 December 1998.

The requirements for acquiring the product described herein  
 shall consist of this specification sheet and MIL-DTL-27599.

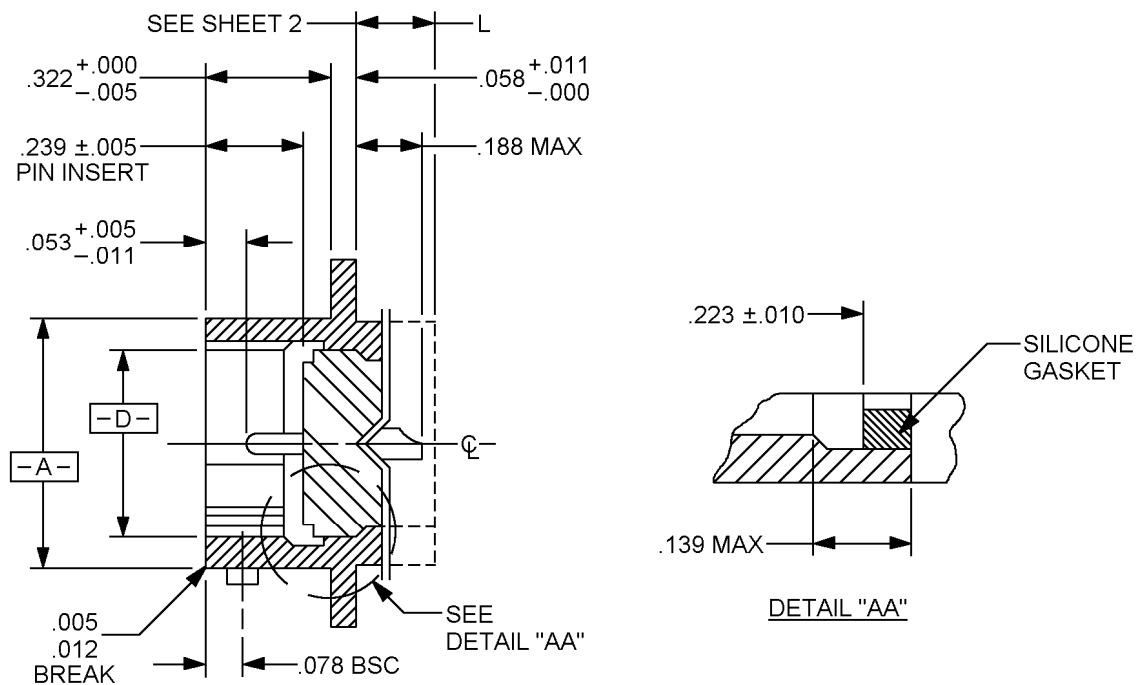

CLASS T AND P

FIGURE 1. Receptacle, wall mount flange.

MS27334D


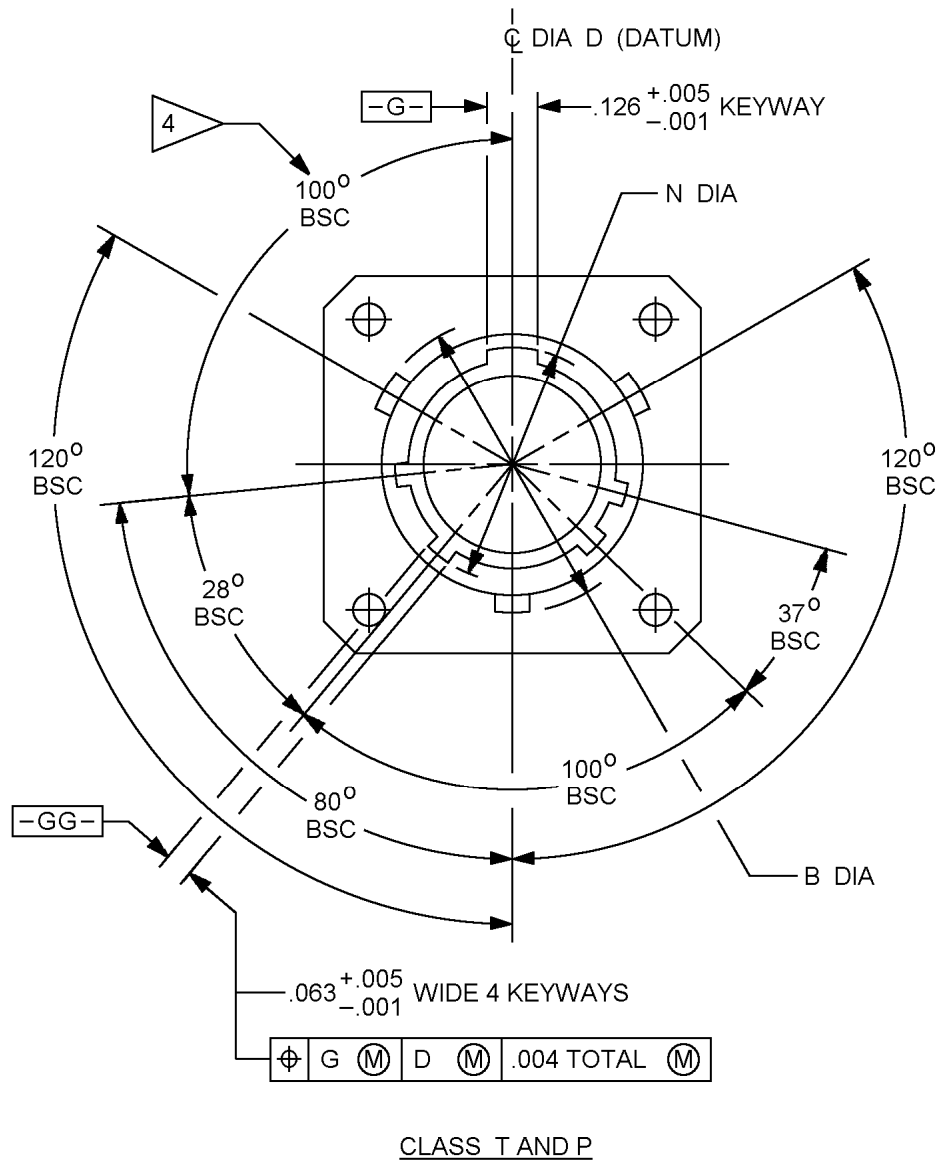


FIGURE 1. Receptacle, wall mount flange - Continued.


MS27334D

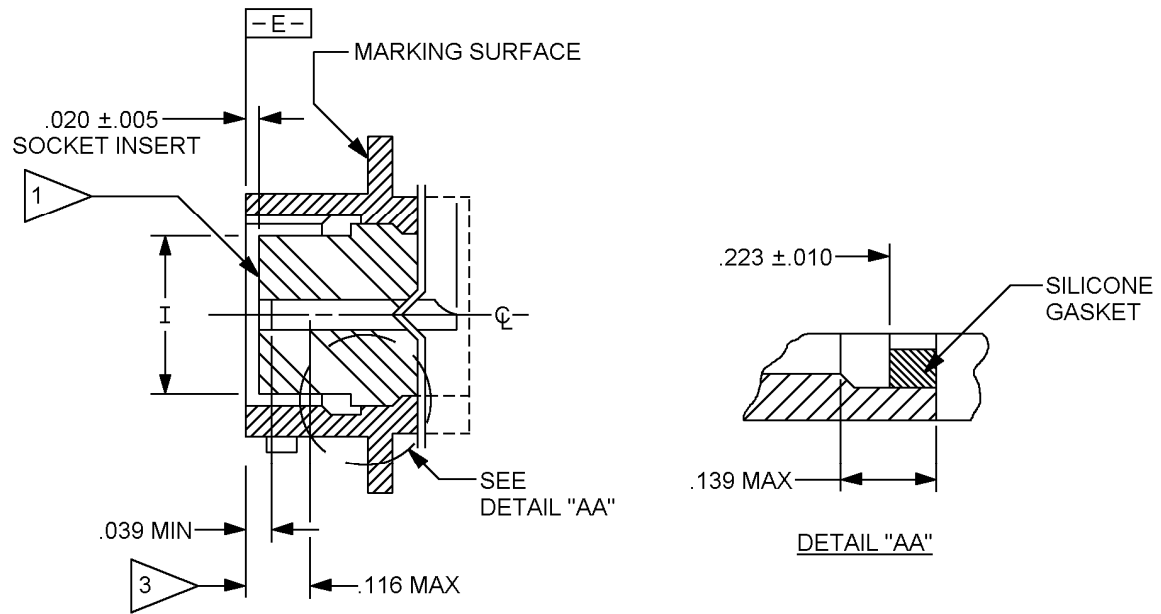

CLASS T AND P

FIGURE 1. Receptacle, wall mount flange - Continued.

## MS27334D

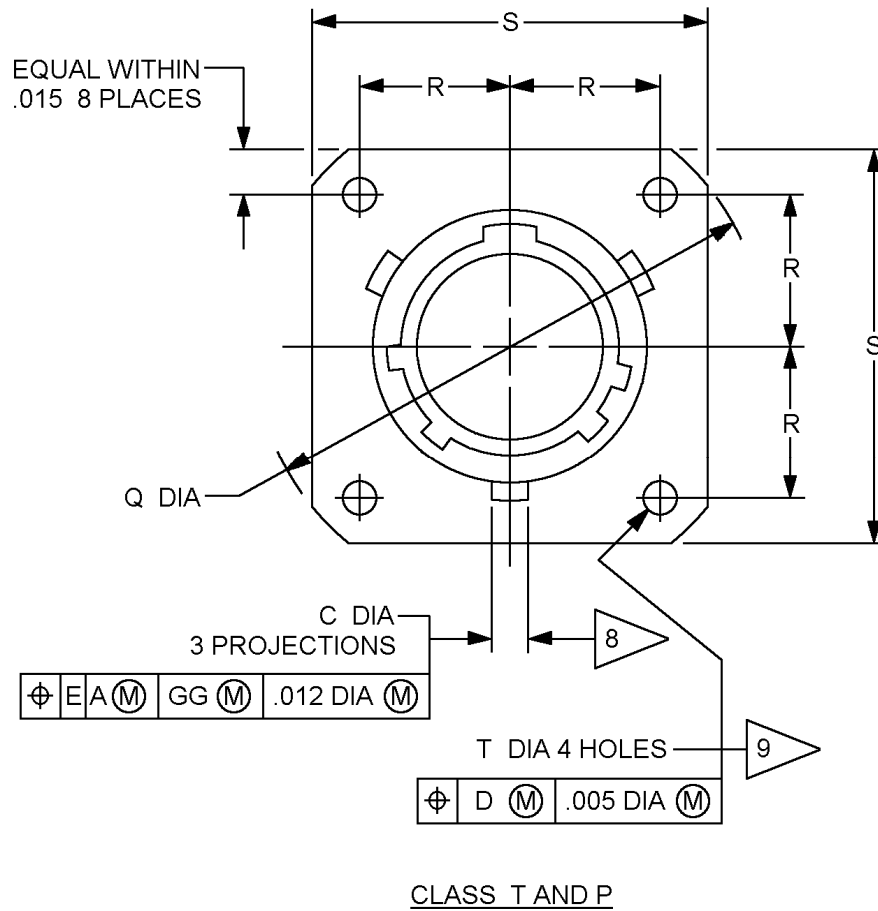FIGURE 1. Receptacle, wall mount flange - Continued.

## MS27334D

Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.001	0.0254	0.012	0.305	0.058	1.473	0.139	3.531
0.004	0.1016	0.015	0.381	0.063	1.600	0.188	4.775
0.005	0.127	0.02	0.508	0.078	1.981	0.223	5.664
0.010	0.254	0.039	0.991	0.116	2.947	0.239	6.071
0.011	0.279	0.053	1.346	0.126	3.200	0.322	8.179

## NOTES:

1. Insert front surface shall be flat within .005 T.I.R.
2. Dimensions are in inches. Metric equivalents are in parenthesis and given for information only.
3. The point at which a gauge pin having the same basic diameter as the mating contact and a square face, touches socket contact spring.
4. Normal keyway position. For other keyway positions, see MIL-DTL-27599.
5. Diameters A and D shall be concentric within .015 T.I.R.
6. Diameter A with respect to diameter B, and diameter D with respect to diameter N, shall be concentric at MMC.
7. Diameters D and I shall be concentric within .005 T.I.R. at MMC.
8. The gauge features for GG shall be CC smaller than their MMC size at basic location.
9. The gauge features for GG shall be .010 smaller than their MMC size at basic location.

FIGURE 1. Receptacle, wall mount flange - Continued.

## MS27334D

TABLE 1. Dimensions.


Shell size	A dia + .001 - .005	B dia + .000 - .016 over projections	C dia + .006 - .002	D dia + .005 - .001	I dia ± .005	N dia + .005 - .006
8	.473 (12.01)	.563 (14.30)	.078  (1.98)	.362 (9.19)	.296 (7.52)	.412 (10.46)
10	.590 (14.98)	.680 (17.27)		.490 (12.44)	.413 (10.49)	.540 (13.71)
12	.750 (19.05)	.859 (21.82)		.607 (15.42)	.527 (13.38)	.689 (17.50)
14	.875 (22.22)	.984 (25.00)		.732 (18.59)	.652 (16.56)	.814 (20.67)
16	1.000 (25.40)	1.108 (28.14)		.857 (21.77)	.777 (19.73)	.939 (23.85)
18	1.125 (28.57)	1.233 (31.32)		.962 (24.43)	.866 (22.00)	1.039 (26.39)
20	1.250 (31.75)	1.358 (34.49)	.125  (3.175)	1.087 (27.60)	.991 (25.17)	1.164 (29.56)
22	1.375 (34.92)	1.483 (37.67)		1.212 (30.78)	1.116 (28.34)	1.289 (32.74)
24	1.500 (38.10)	1.610 (40.89)		1.337 (33.96)	1.241 (31.52)	1.414 (35.91)

## MS27334D


TABLE 1. Dimensions.

Shell size	Q max	R BSC	S max	T + .010 - .005	CC
8	1.078 (27.38)	.297 (7.54)	.828 (21.03)	.120  (3.05)	.004 (.102)
10	1.266 (32.15)	.3595 (9.1313)	.954 (24.23)		.010  (.254)
12	1.391 (35.33)	.406 (10.31)	1.047 (26.59)		
14	1.516 (38.50)	.453 (11.50)	1.141 (28.98)		
16	1.641 (41.68)	.4845 (12.30)	1.234 (31.34)		
18	1.766 (44.85)	.531 (13.48)	1.328 (33.73)		
20	1.891 (48.03)	.578 (14.68)	1.453 (36.90)		
22	2.016 (51.20)	.625 (15.87)	1.578 (40.08)		
24	2.204 (55.98)	.6875 (17.46)	1.703 (43.25)	.147 (3.73)	

MS27334D

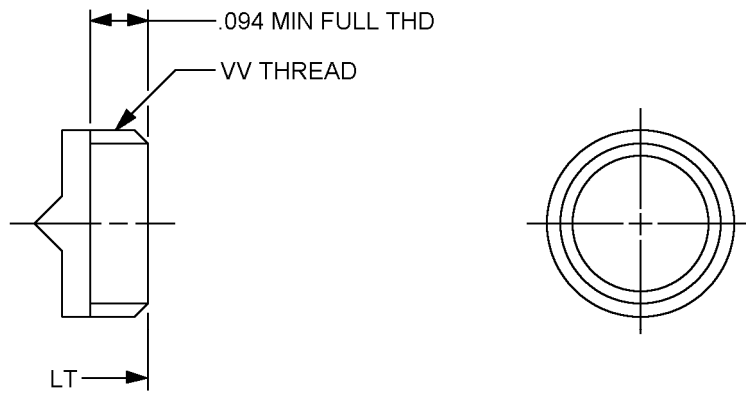

CLASS T

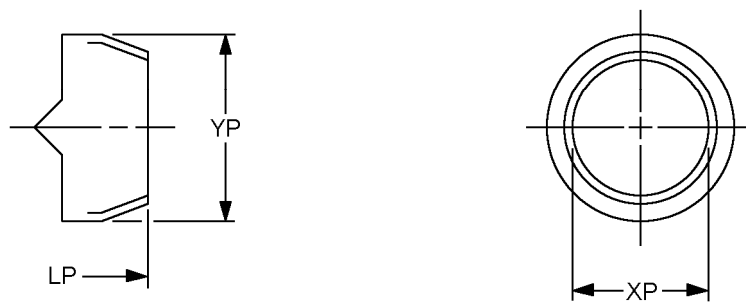

CLASS P

FIGURE 2. Receptacle, rear accessory areas.

## MS27334D

TABLE 2. Dimensions.

Shell size	LT max	VV thread UNEF-2A MOD (plated)		LP max	XP min dia	YP max dia
		Size	Major dia MOD			
8	.250 (6.35)	.4375 - 28	.421 - .417 (10.69 – 10.60)	.453 (11.50)	.317 (8.05)	.531 (13.48)
10		.5625 - 24	.542 - .538 (13.76 – 13.66)		.434 (11.02)	.641 (16.28)
12		.6875 - 24	.667 - .663 (16.94 – 16.84)		.548 (13.92)	.766 (19.45)
14		.8125 - 20	.791 - .787 (20.09 – 19.98)		.673 (17.09)	.891 (22.63)
16		.9375 - 20	.916 - .912 (23.26 – 23.16)		.798 (20.27)	1.016 (25.80)
18		1.0625 - 18	1.034 - 1.030 (26.26 – 26.16)		.899 (22.83)	1.125 (28.57)
20		1.1875 - 18	1.158 - 1.154 (29.41 – 29.31)		1.024 (26.01)	1.250 (31.75)
22		1.3125 - 18	1.283 - 1.279 (32.58 – 32.48)		1.149 (29.18)	1.375 (34.92)
24	.328 (8.33)	1.4375 - 18	1.408 - 1.404 (35.76 – 35.66)	.531 (13.48)	1.274 (32.36)	1.500 (38.10)

## REQUIREMENTS

Dimensions and configurations: See figures 1 and 2 and tables 1 and 2.

This connector mates with MS27336.

Insert arrangement shall be in accordance with MIL-STD-1560.

## MS27334D

Part or Identifying Number (PIN) example:

	<u>MS27334</u>	<u>T</u>	<u>24</u>	<u>A</u>	<u>61</u>	<u>P</u>	<u>A</u>
MS number	_____						
Class	_____						
Shell size	_____						
Finish (color)	_____						
Insert arrangement	_____						
Style	_____						
Polarizing position (No letter is required for normal position)	_____						

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. In addition to MIL-DTL-27599, this document references the following:

MIL-STD-1560  
MS27336

## CONCLUDING MATERIAL

Custodians:  
Air Force - 11  
DLA - CC

Preparing activity:  
DLA - CC

Review activities:  
Air Force - 99  
DLA - IS

(Project 5935-4650-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.