


DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities:

Review activities:

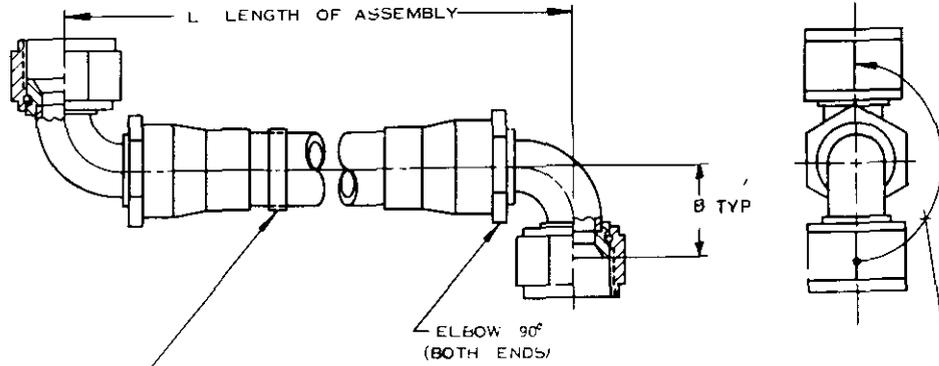

FED. SUP. CLASS  
4720

PERMANENT BAND CARRYING THE FOLLOWING MARKINGS:

MS PART NO.  
MFR. NAME OR TRADEMARK  
HOSE MFR. FED. SUPPLY CODE NO.  
OPERATING PRESSURE (3000 P.S.I.)  
PRESSURE TEST SYMBOL (PT)  
DATE OF HOSE ASSY. MFR. EXPRESSED IN TERMS OF MONTH AND YEAR

ANGLE ORIENTATION  
MEASURED IN DEGREES  
COUNTER-CLOCKWISE

TOLERANCE:  
± 2% FOR ALL HOSE LENGTHS

DASH NO.	CODE LETTER	TUBING O.D. REF	HOSE I.D. REF	"B" REACH	
				MIN	MAX
-4	E	1/4	7/32	.500	.805
-6	G	3/8	5/16	.673	1.006
-8	H	1/2	7/16	.797	1.300
-10	J	5/8	9/16	1.140	1.670
-12	K	3/4	11/16	1.340	1.940
-16	M	1	7/8	1.544	2.217
-20	N	1-1/4	1-1/8	2.172	2.297

SWIVEL NUTS MUST HAVE HEX DIMENSIONS IN ACCORDANCE WITH AN818 AND MUST BE INCAPABLE OF BEING REMOVED FROM THE FITTING ASSEMBLY.

FITTING END TO MATE WITH MS33656.

HOSE ASSEMBLIES TO BE SPECIFIED AS:

- 12 INCHES LONG AND UNDER--INCREMENTS NOT LESS THAN 1/8 INCH (TOLERANCE ± 1/8 INCH)
- 12 INCHES TO 18 INCHES LONG--INCREMENTS NOT LESS THAN 1/4 INCH (TOLERANCE ± 1/8 INCH)
- 18 INCHES TO 36 INCHES LONG--INCREMENTS NOT LESS THAN 1/2 INCH (TOLERANCE ± 1/4 INCH)
- OVER 36 INCHES LONG--INCREMENTS NOT LESS THAN 1 INCH (TOLERANCE ± 1% OF LENGTH)

THE PART NO. SHALL BE FORMULATED TO REFLECT THE BASE NUMBER, SIZE, LENGTH AND ANGLE.

Ⓢ CANCELLED - FOR PROCUREMENT USE AS158 AND AS632


P.A. USAF - II OTHER CUST. Army - ME Navy - AS	TITLE HOSE ASSEMBLY, TETRAFLOROETHYLENE, HYDRAULIC AND PNEUMATIC, (3000 P.S.I.) ELBOW 90° TO ELBOW 90° FLARED	MILITARY STANDARD <b>MS27368</b>
	PROCUREMENT SPECIFICATION MIL-H-38360	SUPPLEMENT:

APPROVED 2 Apr 65 REVISED (A) 7 Dec 66 (B) 21 Nov 67 (C) 21 May 68 (D) 18 Aug 72 (E) 15 DEC 76 (F) 20 JUNE 1986

4720-0737

FED. SUP CLASS  
4720

EXAMPLE OF PART NUMBER

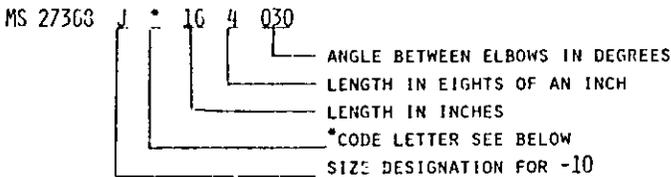

\* ADD CODE LETTER BELOW FOR ADDITIONAL FEATURES (IF REQUIRED)

- "A" AS 1072-XX-SIL SLEEVE, FIRE PROTECTION (SILICONE) (-65°F (-54°C) THRU +500°F (+260°C)) SECURE WITH CRES BANDS AS REQUIRED
- "B" AS 1073-XX-A/B SLEEVE, HEAT SHRINKABLE (-65°F (-54°C) THRU +250°F (121°C)) (A DESIGNATES TRANSPARENT COVER FOR I.D. BANDS, ETC., MATERIAL IRRADIATED POLYOLEFIN, NOT FLAME RESISTANT) (B DESIGNATES OPAQUE BLACK COVER FOR ABRASION PROTECTION, SELF-EXTINGUISHING IN FLAME)
- "C" AS 1291-XX-A/B SLEEVE, CHAFEGUARD, TFE (-65°F (-54°C) THRU +500°F (+232°C)) (A DESIGNATES WHITE EXTRUDED AND SEAMLESS) (B DESIGNATES BLACK EXTRUDED AND SEAMLESS) WITH CRES BANDS, AS REQUIRED
- "D" AS 1291-XX-C SLEEVE, CHAFE GUARD, FEP (-65°F (-54°C) THRU +350°F (+177°C)) (C DESIGNATES TRANSPARENT FEP) SECURE WITH CRES BANDS AS REQUIRED
- "E" AS 1291-XX SLEEVE, HEAVY WALL, CHAFE GUARD, TFE (-65°F (-54°C) THRU +450°F (+232°C)) SECURE WITH CRES BANDS
- "L" LOCKWIRE HOLE
- "F" CODE A + L
- "G" CODE B + L
- "H" CODE C + L
- "J" CODE D + L
- "K" CODE E + L

THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS, SHALL BE COATED WITH RTV RUBBER.

DIMENSIONS IN INCHES

FOR DESIGN PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Solicitation for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 2 Apr 65  
REVISED A 7 Dec 66 B 21 Nov 67 C 21 May 68 D 18 Aug 72 E 15 Dec 76 F 20 Jun 86

P. A. AIR FORCE - 11 Other Cust ARMY - ME NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, TETRAFLUOROETHYLENE, HYDRAULIC AND PNEUMATIC, (3000 P.S.I.) ELBOW 90° TO ELBOW 90° FLARED	MILITARY STANDARD
	PROCUREMENT SPECIFICATION MIL-H-38360	SUPERSEDES:	MS 27368
			SHEET 2 OF