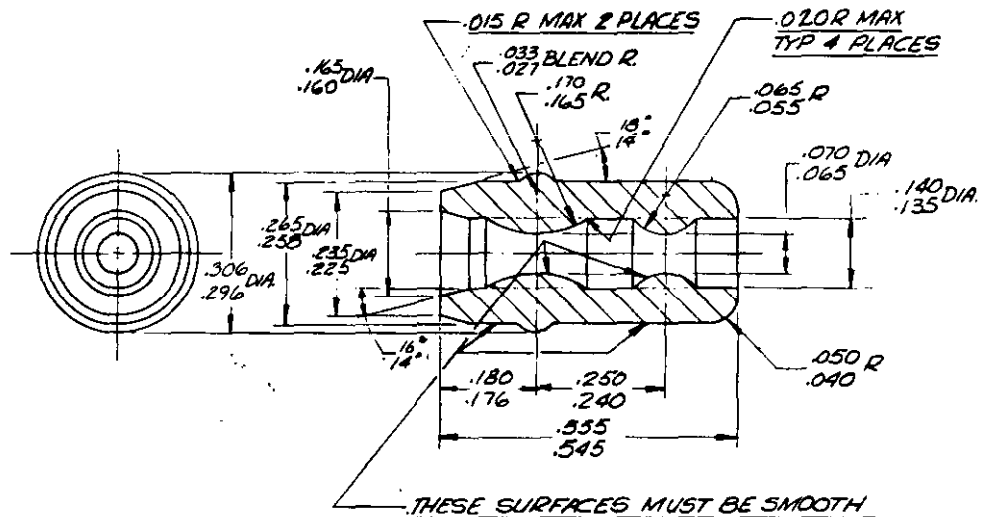


FED. SUP CLASS  
5935Review activities:  
Air Force - 99

(B) Cancelled for procurement use  
MIL-C-39029/54 or /55

## NOTES:

1. PART MUST BE FREE OF FLASH, CRACKS, OR CAVITIES.
2. ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .004 T.I.R.
3. CORNER RADII SHALL BE .008 MAX. UNLESS OTHERWISE SPECIFIED.
4. IMMEDIATELY AFTER MOLDING, CURE BOOTS.
5. ALL DIMENSIONS ARE AFTER CURING.

This military standard is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

P.A. AIR FORCE 85  
Other Cust

TITLE

BOOT, SEALING,  
COAXIAL CONTACTS

MILITARY STANDARD

MS27397(USAF)

PROCUREMENT SPECIFICATION  
MIL-C-26636

SUPERSEDES:

SHEET / OF /

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-F-146-1

APPROVED 15 JUNE 65 REVISED (A) 5 JAN 66 (B) 6 NOV 79