


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

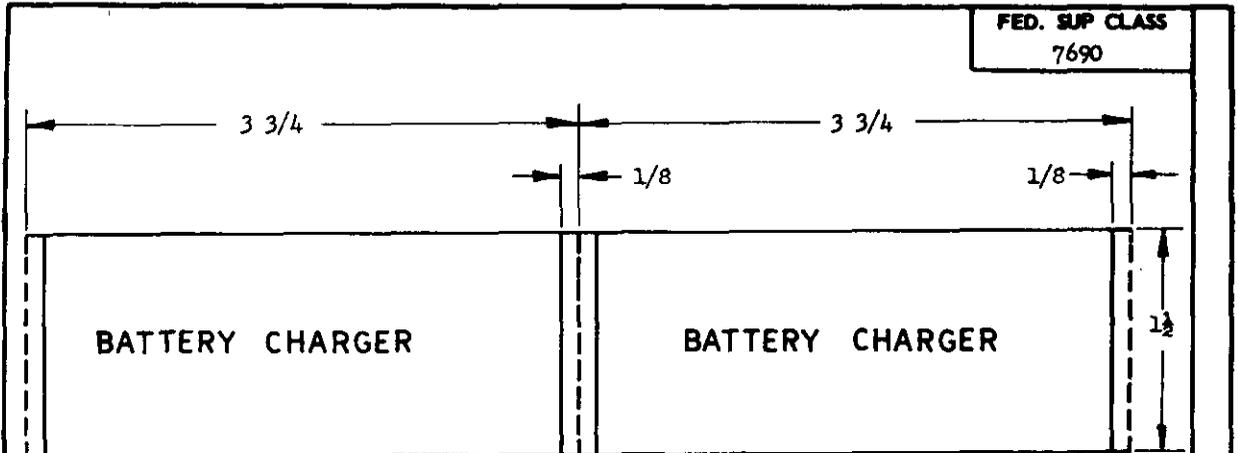

FED. SUP CLASS
7690

MS PART NO.	FIRM	DIMENSIONS
MS 27412		1 1/2 in. W. 36 yd. lg. O/A Dim.

NOTES: 1. The colors are in accordance with Federal Standard 595.

- (a) Background color yellow number 23655
- (b) Letters black color number 27036

2. The space between each printed legend " Battery Charger " shall be 1/4 inch. The perforations shall be 1/8 inch from the end of every two (2) labels and shall be perforated every 7 1/2 inches. A width tolerance of + or - 1/16 inch will be permitted. Material for label tape shall be in accordance with Military Specification MIL-T-9906.

3. This Standard takes precedence over documents referenced herein.

4. Referenced documents shall be of the issue in effect on date of invitations for bid.

ⓑ Cancelled after 6 Apr 84
NO SUPERSEDING STANDARD

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-096/5-5284

P.A. AIR FORCE: 84	TITLE	MILITARY STANDARD
Other Cust ARMY: GL NAVY: AS	LABEL TAPE, PRESSURE SENSITIVE ADHESIVE	MS27412
Procurement Specification	SUPERSEDES:	SHEET 1 OF 1

APPROVED 14 JUNE 1965 REVISED (A) 3 APRIL 1970 (B) 6 APR 84