
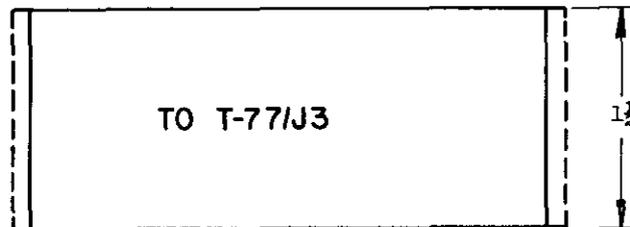
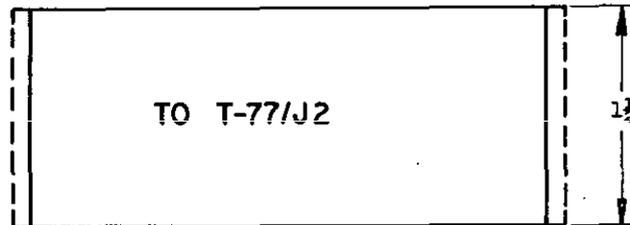


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacturer, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS
7690

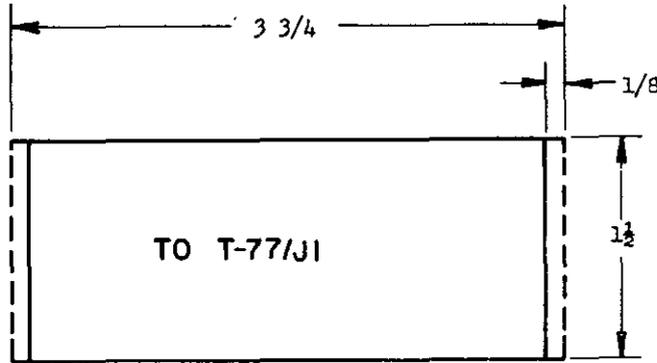

MS PART NO.	FILM	DIMENSIONS
MS 27415 - 1		1 1/2 IN.W. 36 YD. LG. O/A DIM.
MS 27415 - 2		1 1/2 IN.W. 36 YD. LG. O/A DIM.
MS 27415 - 3		1 1/2 IN.W. 36 YD. LG. O/A DIM.

NOTES: 1. The colors are in accordance with Federal Standard 595.

a. Background color yellow number 23655
Letters black color number 27038

2. The space between each printed legend shall be 1/2 inch. The perforations shall be 1/8 inch from the end of every two (2) labels and shall be perforated every 7 1/2 inches. A width tolerance of + or - 1/16 inch will be permitted. Material for label tape shall be in accordance with Military Specification MIL-T-9906.

This standard takes precedence over documents referenced herein.

(B) 4. Referenced documents shall be of the issue in effect on date of invitations for bid.

Canceled after
 NO SUPPLYING STANDARD
 APR 1984

APPROVED 14 JUNE 1965 REVISED (A) 3 APRIL 1970 (B) 6 APR 84

P.A. AIR FORCE: 84	TITLE	MILITARY STANDARD
Other Cust ARMY: GL NAVY: AS	LABEL, TAPE, PRESSURE SENSITIVE ADHESIVE	MS 27415
Procurement Specification	SUPERSEDES:	SHEET 1 OF 1