

INCH-POUND

MS27473N
2 February 2012
SUPERSEDING
MS27473M
12 July 2002

DETAIL SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, STRAIGHT,
CRIMP TYPE, BAYONET COUPLING, SERIES II

Reactivated after 24 May 2004 and may be used
for new and existing designs and acquisitions.

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-38999.

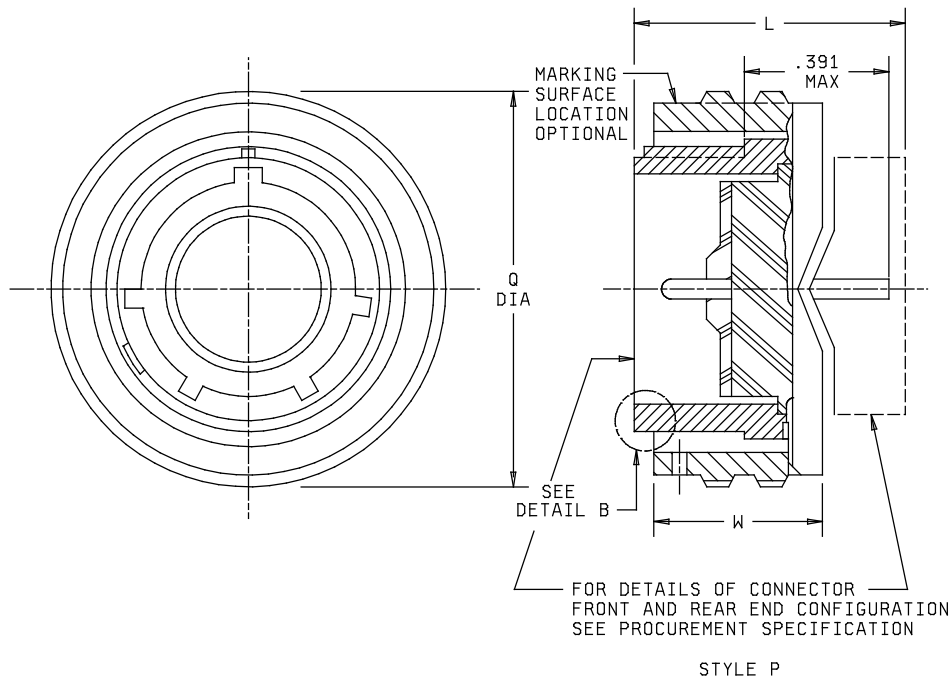


FIGURE 1. Plug, classes E, T and P.

MS27473N

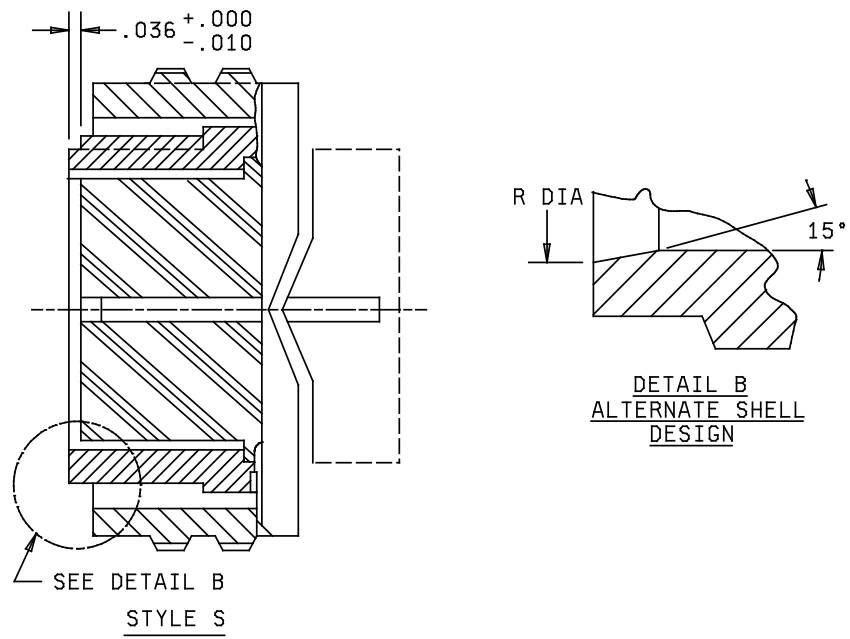


FIGURE 1. Plug, classes E, T and P - Continued.

MS27473N

Shell size	L max			Q dia max	R dia + .005 -.006	W ± .015
	Class E	Class P See note 5	Class T See note 6			
8	1.026	1.020	.766	.750	.316	.547
10				.859	.436	
12				1.031	.549	
14				1.156	.675	
16				1.281	.799	
18				1.406	.893	
20				1.531	1.018	.524
22				1.641	1.143	
24	1.104	1.080	.844	1.766	1.268	.575

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.524	13.31	.844	21.44	1.143	29.03
.006	0.15	.547	13.89	.859	21.82	1.156	29.36
.010	0.25	.549	13.94	.893	22.68	1.268	32.21
.015	0.38	.575	14.61	.953	24.21	1.281	32.54
.036	0.91	.675	17.15	1.018	25.86	1.406	35.71
.316	8.03	.750	19.05	1.020	25.91	1.531	38.89
.391	9.93	.766	19.46	1.031	26.19	1.641	41.68
.436	11.07	.799	20.29	1.080	27.43	1.766	44.86

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For main key polarization and key positions, see MIL-DTL-38999.
4. Dimensions and tolerances are in accordance with ASME Y14.5.
5. Applicable potting forms: SAE-AS85049/58 and SAE-AS85049/75.
6. To the end of teeth.

FIGURE 1. Plug, classes E, T and P - Continued.

MS27473N

REQUIREMENTS:


Dimensions and configurations: See figure 1.

Interface dimensions shall be in accordance with MIL-DTL-38999.

Mating connectors: MIL-DTL-38999/10, MS27472, MS27474, MS27475, MS27476, MS27477, MS27478, MS27479, MS27480, MS27481, MS27497, MS27499, MS27504, MS27508 and MS27513.

Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

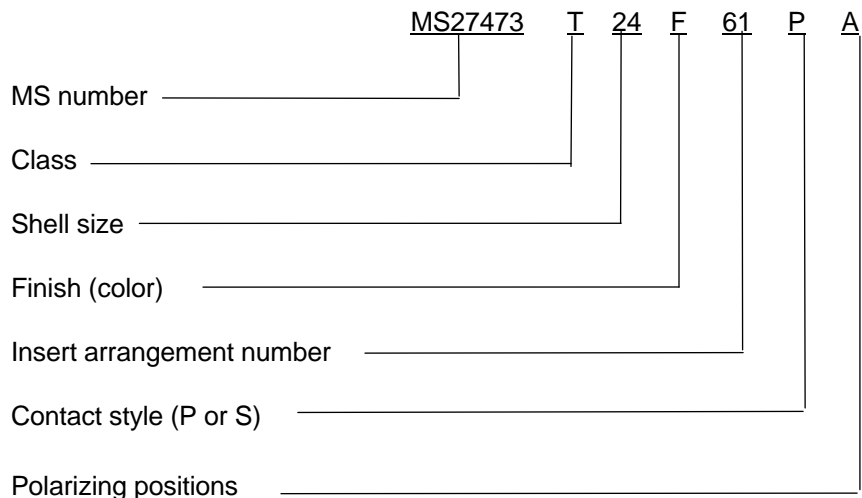

No letter is required for normal.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/10
 MIL-STD-1560
 MS27472
 MS27474
 MS27475
 MS27476
 MS27477
 MS27478
 MS27479
 MS27480
 MS27481
 MS27497
 MS27499
 MS27504
 MS27508
 MS27513
 ASME Y14.5
 SAE-AS85049/58
 SAE-AS85049/75

MS27473N

CONCLUDING MATERIAL

Custodians:

Army - CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2012-027)

Review activities:

Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99
DLA – IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>.