

INCH-POUND

MS27480H

27 June 2012

SUPERSEDING

MS27480G

12 July 2002

DETAIL SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, STRAIGHT,
CRIMP TYPE, BAYONET COUPLING, SERIES II

Inactive for new design after 27 June 2012.
For new design, use MS27473.

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-38999.

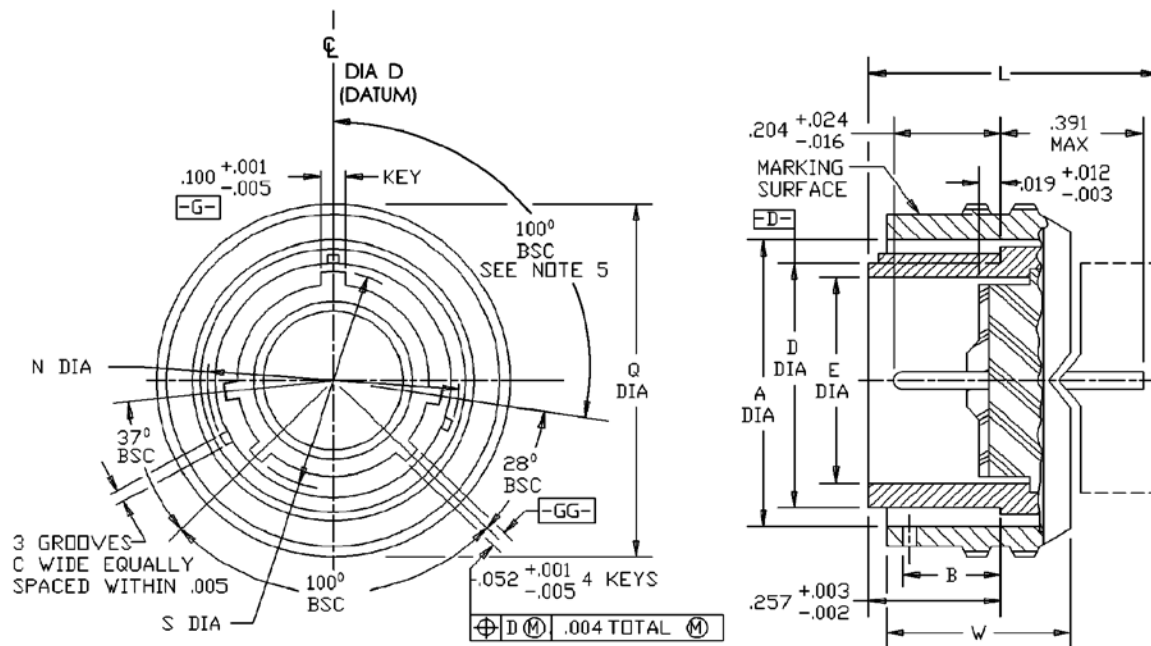


FIGURE 1. Plug, classes E and T.


MS27480H

Shell size	A dia +.005 -.001	B $\pm .020$	C +.015 -.001	D dia +.001 -.005	E dia min	F dia +.000 -.006	K max REF	N dia +.010 -.006
8	.481	.096	.090	.357	.306	.630	.155	.576
10	.602			.485	.423	.752		.697
12	.761			.597	.537	.925		.871
14	.885			.722	.662	1.050		.995
16	1.010			.847	.787	1.172		1.120
18	1.136			.947	.876	1.304		1.245
20	1.260	.123	.137	1.072	1.001	1.435	.109	1.370
22	1.385			1.197	1.126	1.560		1.495
24	1.510			1.322	1.251	1.688		1.624

Shell size	Q dia max	R +.005 -.006 dia	S +.001 -.010 dia	W $\pm .015$	For insert arrangement, see MS drawing	I dia max
8	.750	.316	.402	.547	27343, 27516	.290
10	.859	.436	.530		27344, 27517	.418
12	1.031	.549	.679		27345, 27518	.532
14	1.156	.675	.804		27346, 27519	.657
16	1.281	.799	.929		27347, 27520	.782
18	1.406	.893	1.029		27348, 27521	.871
20	1.531	1.018	1.154	.524	27349, 27522	.996
22	1.641	1.143	1.279		27350, 27523	1.121
24	1.766	1.268	1.404	.575	27351, 27524	1.246

FIGURE 1. Plug, classes E and T – Continued.

MS27480H

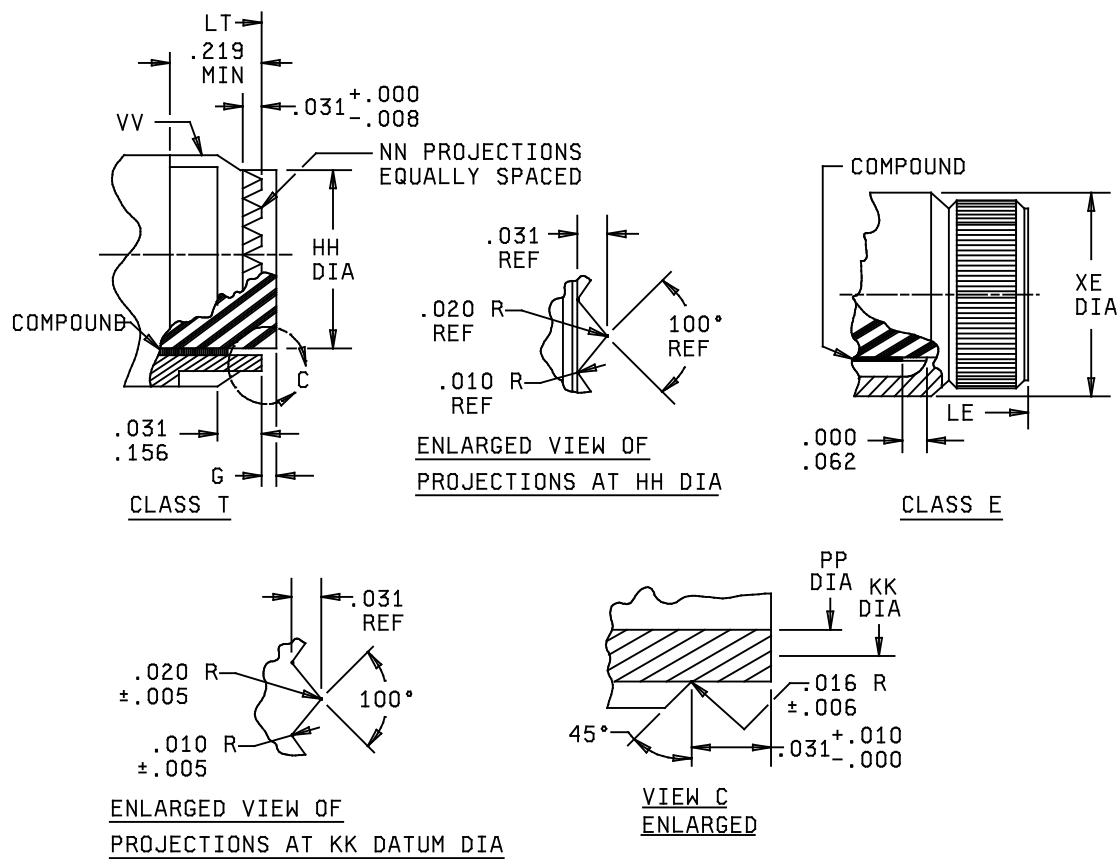

NOTES:

1. Insert front surface shall be flat within .005 T.I.R.
2. Diameter D with respect to diameter S shall be concentric at MMC.
3. Diameters A and N shall be concentric within .008 T.I.R.
4. Dimensions are in inches.
5. Normal key position. For other key positions, see MIL-DTL-38999.
6. The point at which a gage pin, having the same basic diameter as the mating contact and a square face, touches socket contact spring.
7. Holes shall be provided for visual inspection of lock when mated with receptacle.

FIGURE 1. Plug, classes E and T - Continued.

MS27480H

Shell size	G insert projection (class T only)	HH dia +.000 -.005	KK dia (DATUM)	NN	PP dia ± .003
8	.120 ± .030	.387	.366	12	.344
10		.515	.487	16	.472
12		.628	.609	20	.586
14		.754	.731	24	.711
16		.879	.853	28	.836
18		.985	.974	32	.942
20		1.110	1.097	36	1.067
22		1.235	1.218	40	1.192
24	.0900 ± .050	1.360	1.340	44	1.317

Shell size	LE max overall length	LT max overall length	XE dia max	VV thread UNEF-2A MOD (plated)	
				Size	Major dia MOD
8	.953	.766	.594	7/16 – 28	.421 – .417
10			.719	9/16 – 24	.542 – .538
12			.844	11/16 – 24	.667 – .663
14			.969	13/16 – 20	.791 – .787
16			1.094	15/16 – 20	.916 – .912
18			1.219	1 1/16 – 18	1.034 – 1.030
20			1.344	1 3/16 – 18	1.158 – 1.154
22			1.469	1 5/16 – 18	1.283 – 1.279
24		.844	1.594	1 7/16 – 18	1.408 – 1.404

FIGURE 1. Plug, classes E and T - Continued.

MS27480H

REQUIREMENTS:


Dimensions and configuration: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999.

Mating connectors: MIL-DTL-38999/10, MS27472, MS27474, MS27475, MS27476, MS27477, MS27478, MS27479, MS27480, MS27481, MS27497, MS27499, MS27504, MS27508 and MS27513.

Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

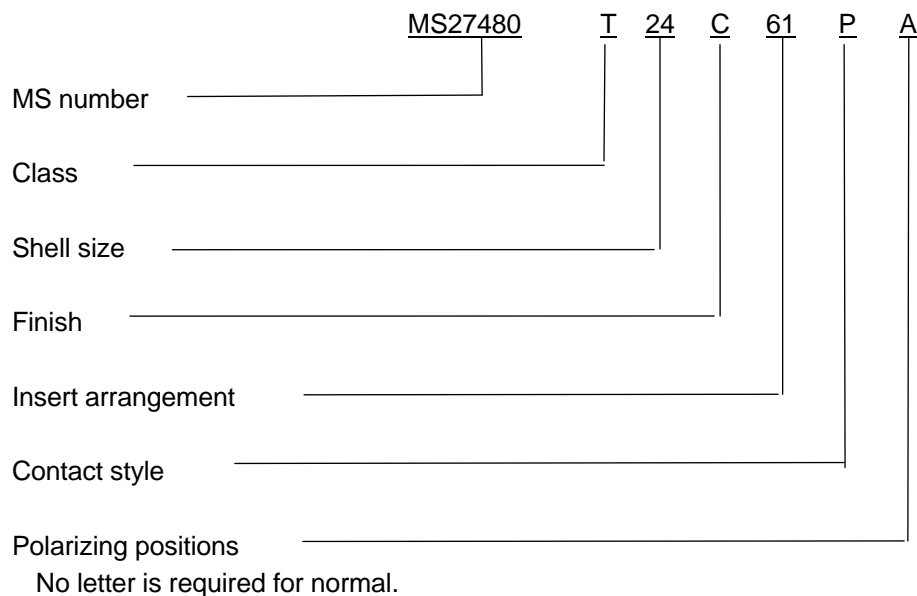

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/10
 MIL-STD-1560
 MS27472
 MS27473
 MS27474
 MS27475
 MS27476
 MS27477
 MS27478
 MS27479
 MS27480
 MS27481
 MS27497
 MS27499
 MS27504
 MS27508
 MS27513

MS27480H

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:

DLA – CC

(Project 5935-2012-030)

Review activities:

Army – AR, MI
Navy – EC, MC, OS
Air Force – 19, 99
DLA – IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.