INCH POUNDS


MS27566G 07 July 2000 SUPERSEDING MS27566F 30 March 1981

DETAILED SPECIFICATION SHEET

CAP ASSEMBLY, LIQUID OXYGEN FILL VALVE

This document remains Inactive for New Design

This specification is approved for use by all Departments and Agencies of the Department of Defense.

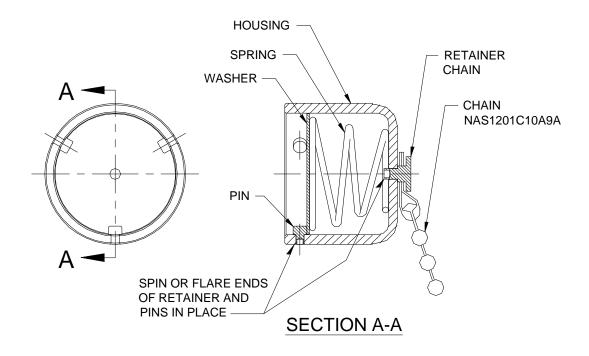

CAP ASSEMBLY MS27566-1


MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

REMOVE BURRS AND BREAK SHARP EDGES 0.005 MAX.


DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMALS $\pm .010$

AMSC N/A 1 of 4 FSC 1660 DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MS27566G

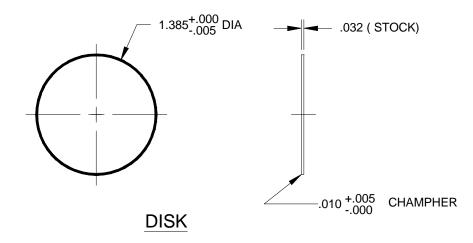

MATERIAL: SAE UNIFIED NUMBERING SYSTEM, S30200, PASSIVATE PER MIL-S-5002. ALTERNATE MATERIAL: S30400. ALL SURFACES TO BE 32/ PER ANSI B46.1

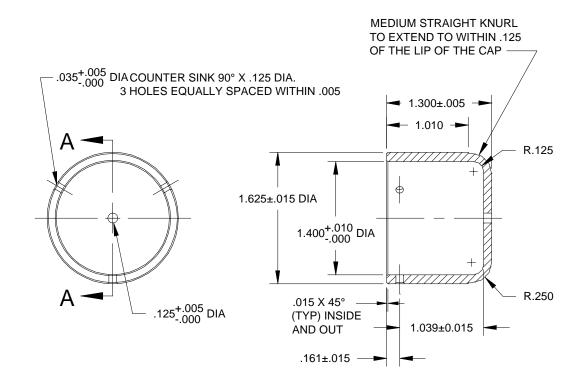


SECTION A-A

HOUSING

MATERIAL: ASTM B209: ALLOY 6061-T4 OR T6 TEMPER ALTERNATE MATERIAL: ASTM B209: ALLOY 2024-T3 OR T4 TEMPER ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR BLACK FINISH: ALL SURFACES 125/ PER ANSI B46.1


MS27566G

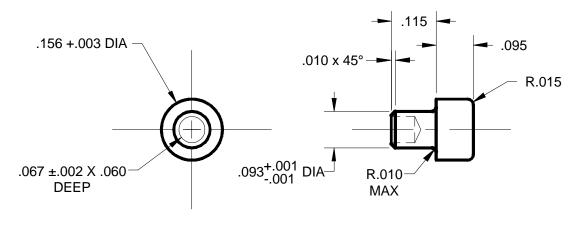

PIN

MATERIAL: S30300 PASSIVATE PER MIL-S-5002 FINISH: 125/ ALL OVER PER ANSI B46.1

3 EACH REQUIRED

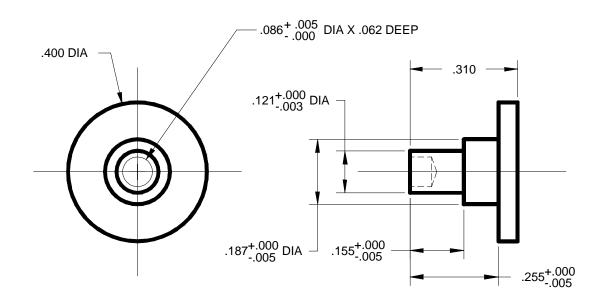


RETAINER-CHAIN

MATERIAL: ASTM B209: ALLOY 6061-T4 OR T6 ALTERNATE MATERIAL: ASTM B209: ALLOY 2024-T3 OR T4 ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR BLACK

FINISH: 125 / ALL OVER PER ANSI B46.1

MS27566G



SPRING

MATERIAL: S30200 DIA. OPTIONAL, .058 ±.002 RECOMMENDED, PASSIVATE PER MIL-S-5002.

TOTAL COILS: 3

TOTAL COMPRESSED HEIGHT: .070

SPRING RATE: 10.3 LBS./IN. TO SUPPORT 7 LBS. @ .300 HEIGHT.

END TO BE SQUARED.

Custodian:

Air Force – 99

Navy - AS

Review activity:

Air Force – 11

Preparing activity:

Air Force – 71

Agent activity:

Air Force – 99

(Project 1660-0812)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

- 1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
- 2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.
- 3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMB MS27566G	2. DO 2000	CUMENT DATE (YYYYMMDD) 0707	
3. DOCUMENT TITLE CAP ASSEMBLY, LIQUID OXYGEN FILL VALVE				
5. REASON FOR RECOMMENDATION				
6. SUBMITTER		I		
a. NAME (Last, First, Middle Initial)		b. ORGANIZATION		
c. ADDRESS (Include Zip Code)		d. TELEPHONE (Include Area Co	de) 7.DATE SUBMITTED	
		(1) Commercial	(YYYYMMDD)	
		(2) AUTOVON (if applicable)		
8. PREPARING ACTIVITY				
a. NAME DENISE A. SIKES		b. TELEPHONE <i>Include Area Co</i> d (1) Commercial	de) (2) AUTOVON	
		(405) 736-2785	336-2785	
c. ADDRESS (Include Zip Code)		IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM)		
OC-ALC/TICLA 3001 STAFF DRIVE		8725 John J. Kingman road, Suite 2533, Ft. Belvoir, VA 22060-2533		
TINKER AFB, OK 73145-5990		Telephone (703) 767-6888	AUTOVON 427-6888	