


Users: Army-ME  
Navy  
Air Force  
DLA - IS

Review: Army - AS  
Activity: Navy - AS  
Air Force - 99  
DLA - IS

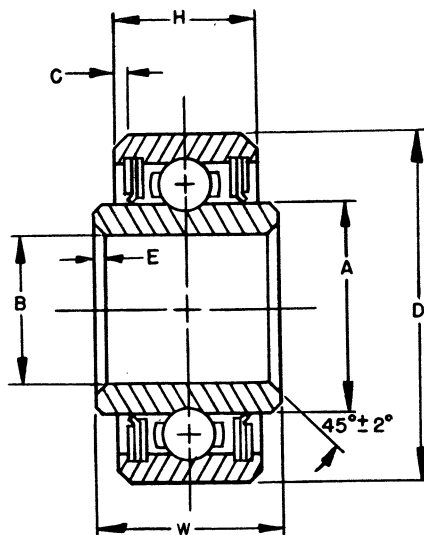

DIMENSIONS IN INCHES

MS DASH NO.	REF. PART NO.	B BORE (a)	D OUTSIDE DIAMETER (a)	W WIDTH INNER RING	H WIDTH OUTER RING	A SHOULDER DIAMETER INNER RING (APPROX.)	E CORNER CHAMFER X 45° INNER RING (b) BORE	C OUTER RING (c) O.D.	RADIAL LIMIT LOAD (f) RATING LBS.	THRUST LIMIT LOAD (f) RATING LBS.	RADIAL LOAD RATING (LBS.) FOR AVERAGE LIFE OF 10,000 COMPLETE (e) 90° CYCLES		WEIGHT POUNDS (APPROX)
		+ .0000 - .0005	+ .0000 - .0005	+ .0000 - .0025	+ .000 - .005		+ .015 - .000				(d) CASE I	(d) CASE II	
-3	AW3AK	.1900	.6250	.406	.312	.317	.005	.016	450	210	440	440	.018
-4	AW4AK	.2500	.7500	.438	.312	.415	.005	.016	525	250	510	510	.028
-5	AW5AK	.3125	.8125	.469	.344	.462	.015	.016	820	380	800	800	.033
-6	AW6AK	.3750	.8750	.469	.344	.520	.015	.016	820	380	800	800	.034
-8	AW8AK	.5000	1.1250	.562	.438	.681	.015	.016	1350	630	1310	1310	.075
-10	AW10AK	.6250	1.3750	.594	.469	.848	.015	.032	1840	860	1790	1790	.119
-12	AW12AK	.7500	1.6250	.656	.531	1.052	.015	.032	2400	1120	2340	2340	.189
-16	AW16AK	1.0000	2.0000	.688	.562	1.334	.015	.032	3000	1400	2920	2920	.296
-20	AW20AK	1.2500	2.2500	.688	.562	1.615	.015	.032	3600	1680	3500	3270	.355

- (a) OUT OF ROUND TOLERANCES, BORE: +.0002, -.0007  
OUTER DIA.: +.0005, -.0010
- (b) A RADIUS GIVING APPROXIMATELY THE SAME GRIP FOR STAKING THE BEARING IN THE HOUSING WILL BE ACCEPTABLE.
- (c) A RADIUS GIVING APPROXIMATELY THE SAME FILLET CLEARANCE WILL BE ACCEPTABLE.
- (d) CASE I - LOAD FIXED WITH RESPECT TO OUTER RACE.  
CASE II - LOAD FIXED WITH RESPECT TO INNER RACE.
- (e) THESE RATINGS ARE FOR OPERATION UP TO 250°F MAX. WHEN SUBJECT TO OPERATION UP TO 350°F, THE RATINGS SHALL BE REDUCED BY 20%.

- (D) 1. MATERIALS: RINGS: AISI 440C, CORROSION RESISTANT STEEL  
BALLS: AISI 440C, CORROSION RESISTANT STEEL
2. SEALS: POLYTETRAFLUOROETHYLENE PER AMS3652 OR POLYTETRAFLUOROETHYLENE SHEET, GLASS FABRIC REINFORCED AMS3666.
3. SEAL RETAINERS: STEEL, CORROSION RESISTANT
4. LUBRICANT: MIL-G-81322 OR MIL-G-23827. MIL-G-81322 SHALL BE USED FOR OPERATION ABOVE 250°F. ALL BEARINGS SHALL BE PREPACKED WITH GREASE CONFORMING TO MIL-G-81322 UNLESS OTHERWISE SPECIFIED. IF MIL-G-23827 IS REQUIRED, ADD THE LETTER G AFTER THE MS PART NUMBER. BEARINGS SHALL BE FILLED 80% MINIMUM.
5. HARDNESS: HEAT TREAT RINGS AND BALLS TO ROCKWELL "C" 57 to 63 AND STABILIZED FOR OPERATION AT 250°F.
6. SURFACE ROUGHNESS: RACEWAYS AND BALLS - 8 MICROINCHES AA PER ANSI B46.1.
7. RADIAL PLAY: .0003 TO .0009.
8. RADIAL ECCENTRICITY: INNER RING: .0010 MAXIMUM, OUTER RING: .0016 MAXIMUM.
9. FACE RUNOUT: INNER RING: .0010 MAXIMUM, OUTER RING: .0016 MAXIMUM.
10. PART NUMBER = MS NUMBER AND DASH NUMBER  
EXAMPLES: MS27469-3, MS27469-3G.
11. REMOVABLE SEALS ARE REQUIRED.

P.A. AIR FORCE - 11	INTERNATIONAL INTEREST	TITLE BEARING, BALL, AIRFRAME, ANTIFRICTION, INTERMEDIATE DUTY	MILITARY STANDARD MS 27649
OTHER CUST ARMY - AV NAVY - AS			
PROCUREMENT SPECIFICATION MIL-B-7949	SUPERSEDES:		SHEET 1 OF 1