

INCH-POUND

MS27709H

1 November 2011

SUPERSEDING

MS27709G

6 February 1996

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 10 AMPERES, 4 PDT,
TYPE I, HERMETICALLY SEALED

INACTIVE FOR NEW DESIGN AFTER 5 JUNE 1987. NO SUPERSEDING STANDARD.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relays described herein shall consist of this specification sheet and MIL-PRF-6106.

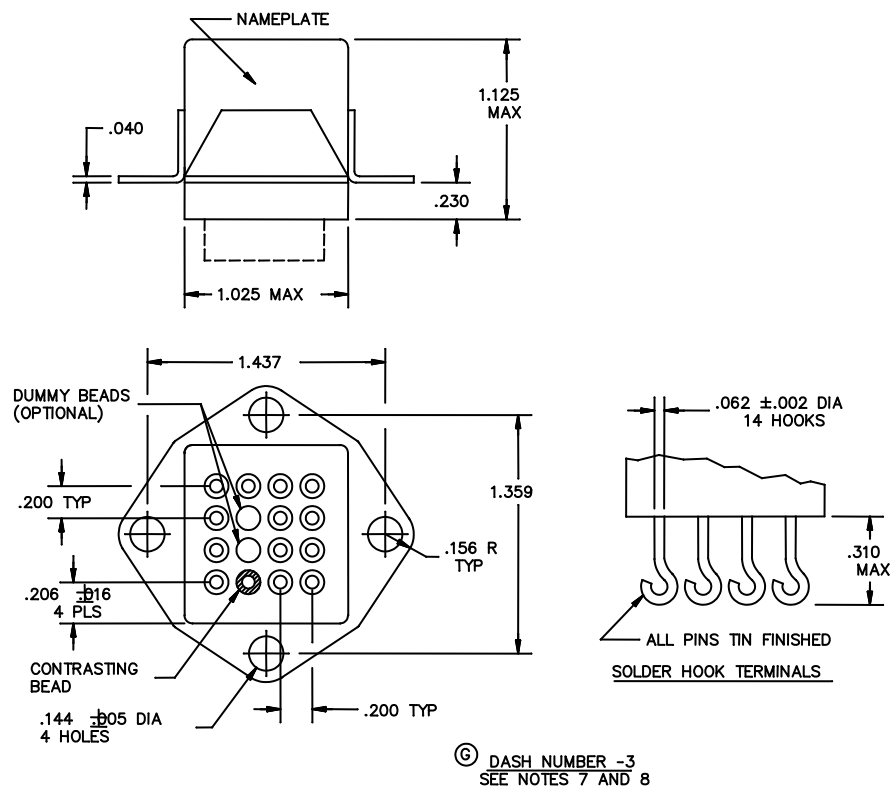


FIGURE 1. Configurations and dimensions.

MS27709H

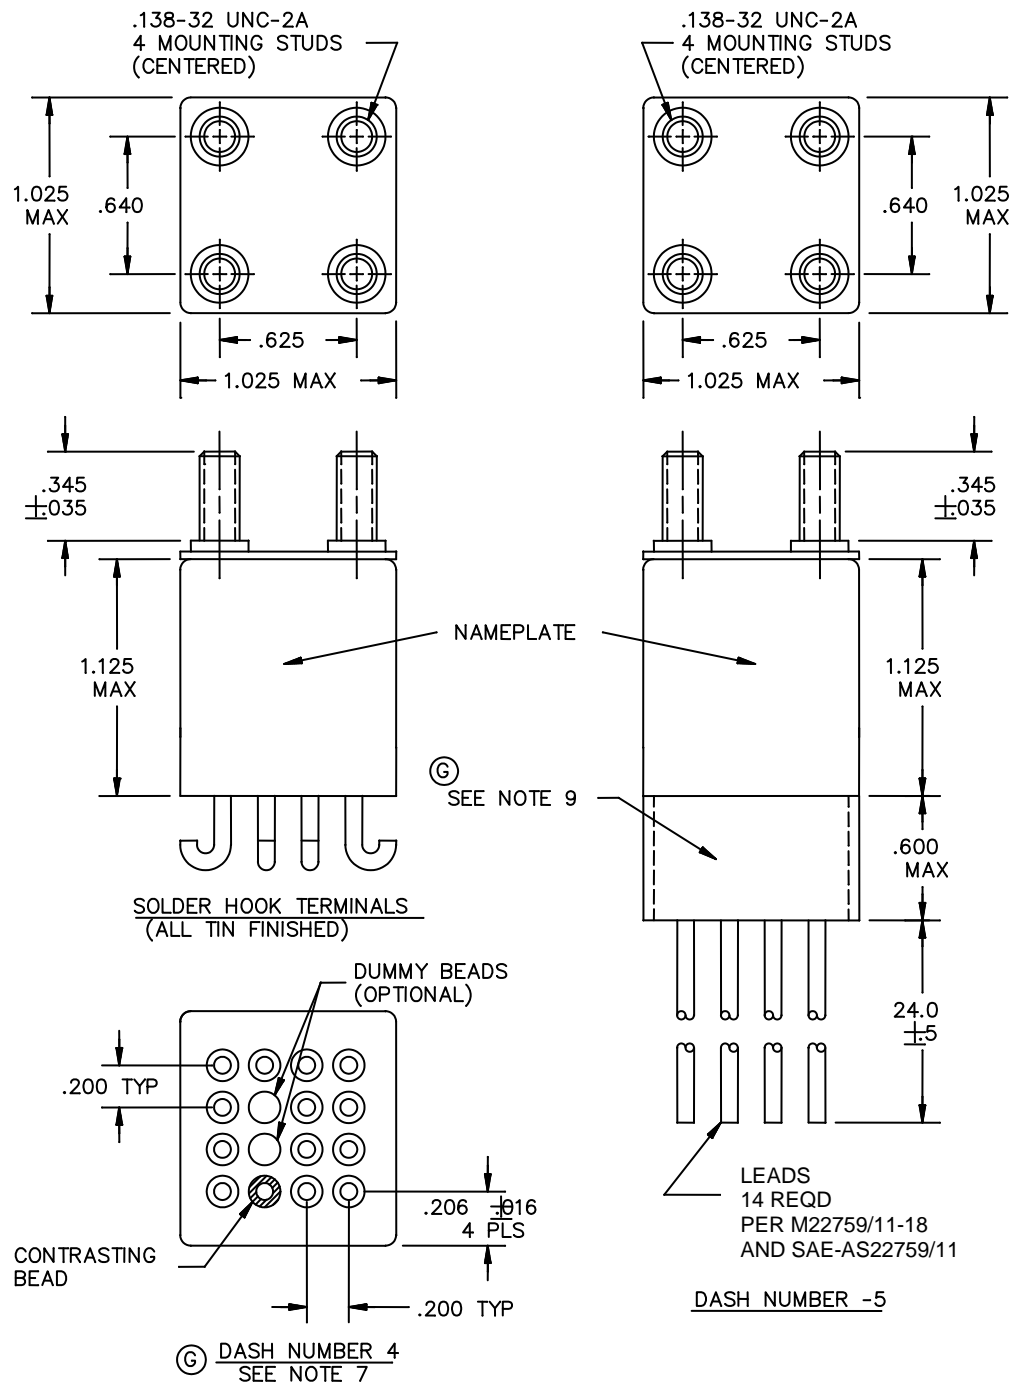


FIGURE 1. Configurations and dimensions - Continued.

MS27709H


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.156	3.96	.625	15.88
.005	0.13	.200	5.08	.640	16.26
.010	0.25	.206	5.23	1.025	26.04
.016	0.41	.230	5.84	1.125	28.58
.035	0.89	.300	7.62	1.359	34.52
.040	1.02	.310	7.87	1.437	36.50
.062	1.57	.345	8.76	24.0	610
.138	3.51	.500	12.70		
.144	3.66	.600	15.24		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 0.010 (0.25 mm).
4. Terminal numbers shall not appear on relay header. There shall be affixed to the relay a legible circuit diagram that identifies each terminal location specified.
5. In the event of a conflict between the test of this document and the references cited herein, the text of this document shall take preference.
6. Referenced Government documents specified in the solicitation are available online at <https://assist.daps.dla.mil/quicksearch/> or <https://www.assist.daps.dla.mil/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094 and form a part of this document to the extent specified herein.
7. Orientation of solder lugs is optional.
8. Shape of flange is optional within the envelope dimensions shown.
9. Shell material shall be diallyl phthalate type SDG in accordance with ASTM-D5948, or equivalent material as approved by the qualifying activity. Shell shall be filled with encapsulation in accordance with MIL-PRF-23586, grade B, type II, class II, or equivalent filler as approved by the qualifying activity.

FIGURE 1. Configurations and dimensions - Continued.

Lead coding (-5 only)			
Term	Color	Term	Color
A1	Blue	C2	White-brown
A2	Brown	C3	White-red
A3	Red	D1	White-yellow
B1	Yellow	D2	White-orange
B2	Orange	D3	White-green
B3	Green	X1	White
C1	White-blue	X2	Black

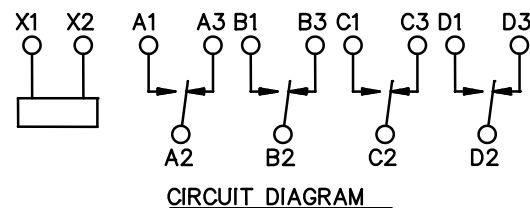CIRCUIT DIAGRAMFIGURE 2. Lead coding and circuit diagram.

MS27709H

REQUIREMENTS:

Configurations and dimensions: See figure 1.

Lead coding and circuit diagram: See figure 2.

Dash numbers and general characteristics: See table I.

Contact data:

Rated contact load: See table II.

Maximum contact drop, initial: 0.150 V.

After life test: 0.175 V.

Overload current (NO): 40 amperes dc.

Rupture current (NO): 50 amperes dc.

Operating characteristics: See table III.

Duty rating: Continuous.

RFI specification: Not applicable.

Electrical data:

Minimum insulation resistance:

Initial: 100 megohms.

After life or environmental test: 50 megohms.

Dielectric strength:

Sea level, 2-5 seconds:

	Initial	After life tests
Coil to case:	1,000 V rms	1,000 V rms
Auxiliary contacts:	N/A	N/A
All other points:	1,250 V rms	1,000 V rms

Altitude, 1 minute (80,000 ft.): 1/

	N/A	250 V rms
Coil to case:	N/A	N/A
Auxiliary contacts:	N/A	350 V rms
All other points:	N/A	

1/ Dielectric may be improved by suitable insulation of terminals and wiring after installation.

MS27709H

Environmental characteristics:

Temperature range: -70°C to +125°C.

Maximum altitude rating: 80,000 feet.

Shock, g-level: 50 g's.

Duration: 10 ms.

Maximum duration contact opening: 1 ms.

Vibration, sinusoidal:

G-level: 20 g's.

Frequency range curve: 10 Hz to 2,000 Hz.

Vibration, random: Not applicable.

High shock: Not applicable.

Acceleration: 15 g's.

Terminal strength (high temperature pull and torque test): Not applicable.

Part or Identifying Number (PIN): MS27709- (plus applicable dash number from table I).

Quality assurance provisions: Group B and group C testing are not required. The manufacturer shall notify the qualifying activity in the event of any design or construction changes, and shall impose additional testing requirements as necessary.

The Qualified Products List (QPL) associated with this inactive for new design specification will be maintained until acquisition of the product is no longer required, whereupon the specification and the QPL will be canceled.

Qualification by similarity: See MIL-PRF-6106.

Supersession data: See table IV.

MS27709H

TABLE I. Dash numbers and general characteristics.

PIN MS27709-	Type	Coil	Terminal type	Mounting or mating socket	Max weight (pound)
3	I	dc	Solder hook	Flange (4 hole)	0.2
4	I	dc	Solder hook	Stud	0.2
5	I	dc	Potted leads	Stud	0.5

TABLE II. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles x 10 ³	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appro- priate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	10	10			10				10				
Inductive	50	8	8			8				8				
Motor	100	4	4			4				4				
Lamp	100	2	2			2				2				
Transfer load														<u>2/</u>
Mechanical' life (reduced current	400	2.5	2.5			2.5				2.5				
Mixed loads		Applicable in accordance with MIL-PRF-6106.												

1/ Absence of value indicates that the relay is not rated for 3 phase applications.

2/ Transfer load indicates that the relay is suitable for transfer between unsynchronized ac power supplies at the rating indicated.

TABLE III. Operating characteristics.

PIN MS27709-	Coil data											Time - (milliseconds maximum)					
	Coil	Rated			Max		Max pickup voltage			Hold voltage 2/	Drop- out voltage 2/	Oper- ate 3/	Re- lease 4/	Contact bounce			
		Volts 1/	Freq. (Hz)	Res (Ω) min	Volts	A	Normal 2/	High temp test	Cont current test					Main		Aux	
														NO	NC	NO	NC
3	X1,X2	28	dc	260	29	.200	18	19.8	22.5	7.0	1.5	15	15	2	2		
4	X1,X2	28	dc	260	29	.200	18	19.8	22.5	7.0	1.5	15	15	2	2		
5	X1,X2	28	dc	260	29	.200	18	19.8	22.5	7.0	1.5	15	15	2	2		

1/ CAUTION: Use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

2/ Over the temperature range,

3/ With rated coil voltage.

4/ From rated coil voltage.

TABLE IV. Supersession data.

Superseded PIN MS27709-	Replacement PIN M83536/15-
1	021
2	022
6	No replacement

MS27709H

MS27709H

Referenced documents:

MIL-PRF-6106
MIL-PRF-23586
ASTM-D5948
SAE-AS22759/11

The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2011-013)

Review activity:
Air Force - 11

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil/>.