

INCH-POUND


MS27719F  
 26 June 1995  
 SUPERSEDING  
 MS27719E  
 18 June 1990

## MILITARY SPECIFICATION SHEET

## (F) SWITCH, TOGGLE, MINIATURE DOUBLE POLE, TOGGLE SEAL

This specification is approved for use by all Departments  
 and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of  
 this specification sheet and the issue of the following specification  
 listed in that issue of the Department of Defense Index of Specifications  
 and Standards (DODISS) specified in the solicitation: MIL-S-83731.

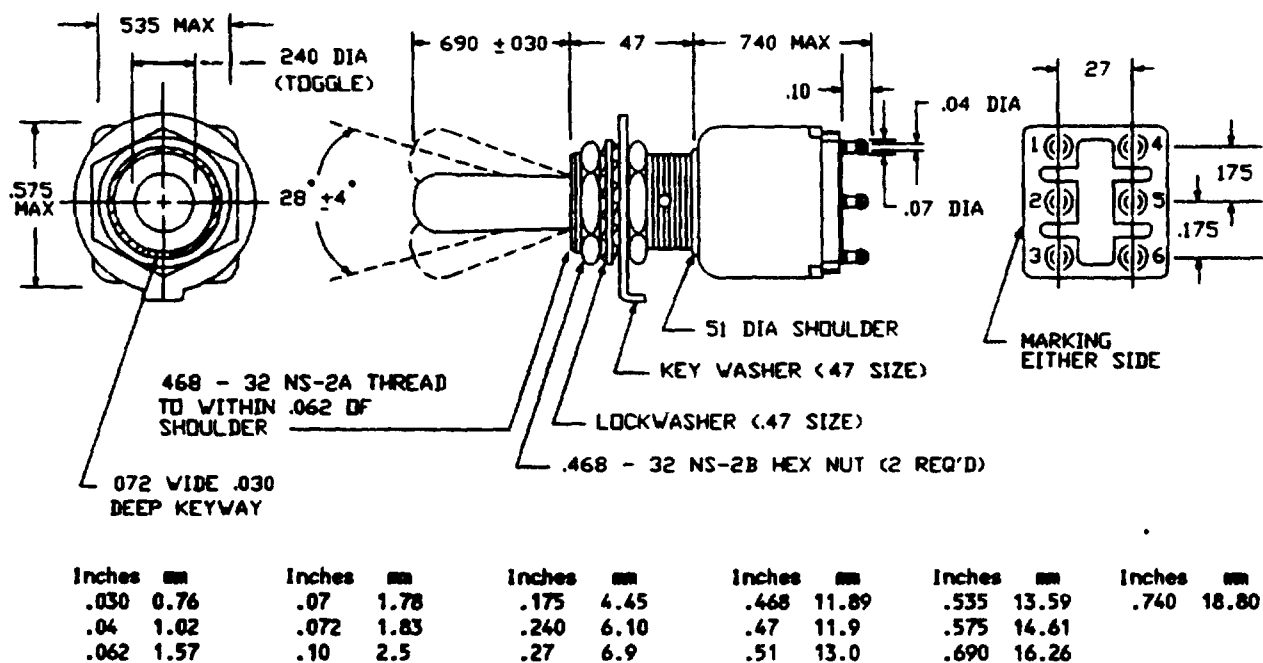

## NOTES:

1. Metric equivalents are given for information only.
2. Dimensions are in inches.
3. Unless otherwise specified, tolerances are ±.020 (0.51 mm) on two place decimals and ±.005 (0.13 mm) on three place decimals.
4. For hardware detail specifications see appendix of MIL-S-83731.
5. Configuration of switch case is optional provided maximum dimensions specified are not exceeded.
6. Terminals shall accommodate no.18 awg wire.

FIGURE 1. Dimension and configurations.

(F) denotes changes

AMSC N/A

1 of 3

FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

## MS27719F

## REQUIREMENTS:

Design and construction: See figure 1.

Switching characteristics: See table 1. Direction of the movement of the switch mechanism is opposite to that of the toggle lever.

Weight: .4 ounce maximum.

Dielectric withstanding voltage: Test voltage for dielectric withstanding voltage at reduced barometric pressure, shall be 400 V rms minimum.

Toggle seal test: Applicable

Electrical endurance: 30,000 cycles.

Electrical ratings:

28 V dc and 115 V ac 400 Hz:

Resistive loads: 5 amperes

Inductive loads: 2 amperes.

Lamp loads: 1 ampere.

Intermediate current: 30,000 cycles

Mechanical endurance: 50,000 cycles at -65°C then 50,000 cycles at 85°C

Part or Identifying Number (PIN):

Example:

MS27719 - 21 - 1

Dash number \_\_\_\_\_  
(see table 1)

PIN MS27719-21-1 identifies a switch with a circuit configuration of ON in the down position (keying side), OFF in center position, and , ON in the up position (opposite the keying side).

(F) TABLE 1. Switching characteristics.

MS PART NUMBER 1/	CIRCUITS MADE WITH TOGGLE LEVER IN		
	KEYING SIDE 1-2    4-5	CENTER POSITION	OPPOSITE KEYING SIDE 2-3    5-6
MS27719-21-1	ON	OFF	ON
-22-1	OFF	NONE	ON
-23-1	ON	NONE	ON
-26-1	MON-ON	NONE	ON
-27-1	MON-ON	OFF	MON-ON
-31-1	MON-ON	OFF	ON

1/ The canceled part numbers (without a -1 suffix) are no longer procurable; the substitute part numbers shown have a lower dielectric withstanding voltage at reduced barometric pressure

MS27719F

Ⓕ CONCLUDING MATERIAL

**Custodian:**

Air Force - 85  
Navy - EC  
Army - ER

**Preparing activity:**  
DLA - ES

(Project 5930-1608)

**Review activity:**

Air Force - 99  
Army - AV