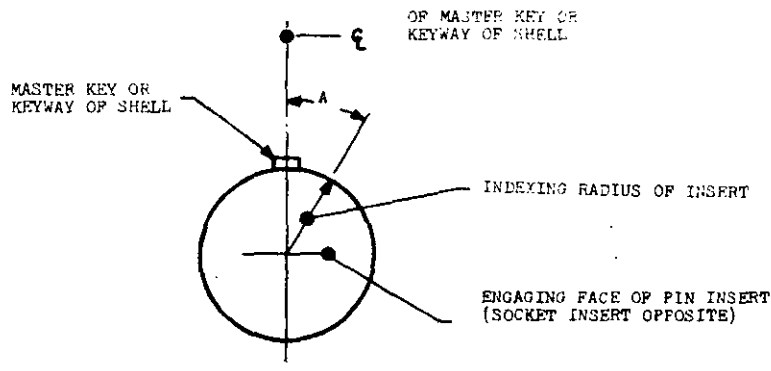


FED. SUP CLASS
5935

NOTES:

1. DIMENSIONS IN INCHES. DIMENSIONING IN ACCORDANCE WITH USASI Y14.5-1966.
2. DIMENSIONS LOCATING CONTACTS AND INSERTS ARE TRUE POSITION. FOLLOWING TOLERANCES APPLY TO INSERT INSTALLED IN SHELL.
 - (A) FOR CRIMP CONTACT CONNECTORS, CENTER OF EACH HOLE IN INSERT SHALL BE LOCATED AT TRUE POSITION WITHIN .014 DIA. $\pm .014$ DIA.
 - (B) CENTER OF ENGAGING END OF EACH CONTACT SHALL BE LOCATED AT TRUE POSITION WITHIN .024 DIA. $\pm .024$ DIA.
3. DIMENSIONS AND MARKINGS SHOWN ARE FOR ENGAGING FACE OF PIN INSERT (SOCKET INSERT OPPOSITE).
4. UNLESS OTHERWISE INDICATED, DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINES.
5. EACH INSERT ARRANGEMENT IS SHOWN IN ITS NORMAL POSITION IN THE SHELL.
6. IN NORMAL POSITION THE INDEXING RADIUS COINCIDES WITH ϵ OF THE MASTER KEY OR KEYWAY OF SHELL.
7. IN ALTERNATE POSITIONS THE PIN INSERT IS ROTATED CLOCKWISE SO THAT ANGLE "A" BETWEEN THE INDEXING RADIUS AND THE ϵ OF THE MASTER KEY OR KEYWAY OF SHELL IS AS REQUIRED.
8. IN ALTERNATE POSITIONS THE SOCKET INSERT IS ROTATED COUNTER-CLOCKWISE SO THAT ANGLE "A" BETWEEN THE INDEXING RADIUS AND THE ϵ OF THE MASTER KEY OR KEYWAY OF SHELL IS AS REQUIRED.

CANCELED AFTER 20 February 78
USE MIL-STD-1669

(A) Denotes Changes

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

P.A. AIR FORCE 85 Other Cast	TITLE INSERT ARRANGEMENTS MIL-C-83723 ELECTRIC CONNECTOR SIZE 22	MILITARY STANDARD MS27732 (USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978-703-122/1155

5935-F089-6

APPROVED 26 MARCH 1969 REVISED (A) 20 Feb 78

Custodian : AF 85
Reviewers : AF 99

This standard is approved by the AF 85/201E Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.