


FED. SUP CLASS
1670

User activities:

Review activities:

ARMY - AV

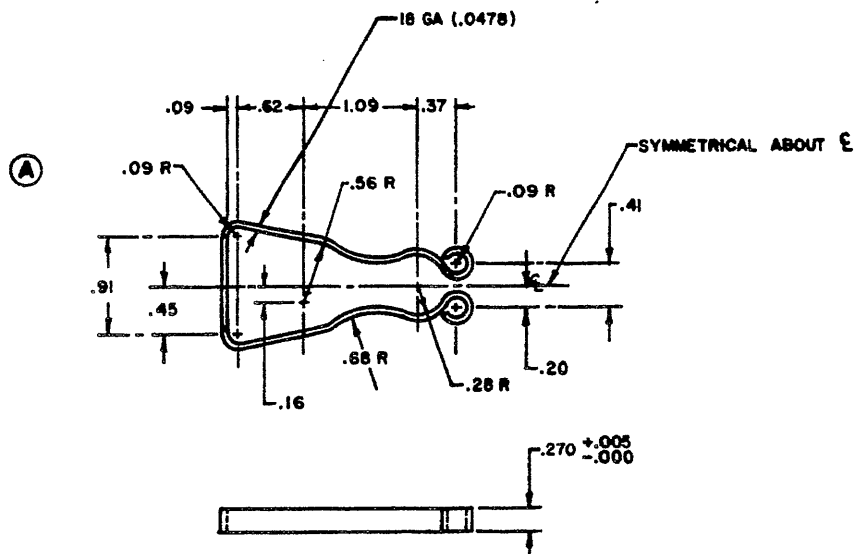

NOTES:

1. MATERIAL: STEEL MIL-S-7947.
2. FINISH: MIL-P-16232 TYPE Z, CLASS 4B FOLLOWED BY WAX EMULSION MIL-W-3688.
3. HEAT TREATMENT: HEAT TREAT TO SPRING TEMPER AFTER FORMING, IN A/W MIL-H-6875.
4. DIMENSIONS SHALL BE IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCES: DECIMALS $\pm .03$
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. USAF - 82 Other Cost Army - GL Navy - AS	TITLE CLIP - PARACHUTE HARNESS QUICK RELEASE, SAFETY	MILITARY STANDARD	
		MS 27759	
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: USAF DWG 44A9348	SHEET	OF