


FED. SUP CLASS  
1670

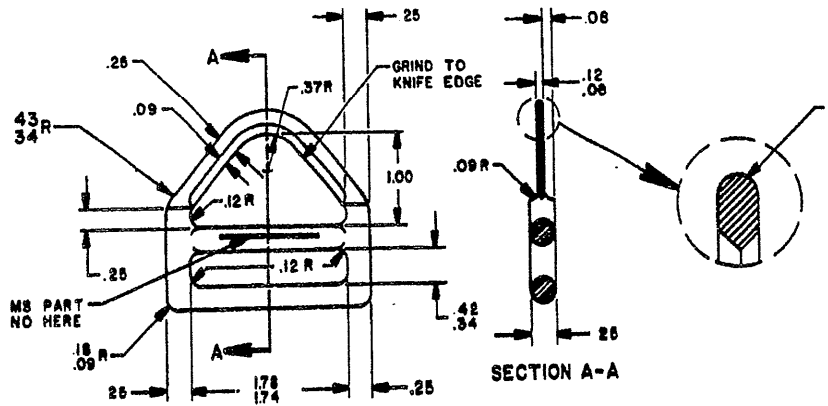

NOTES:

1. MATERIAL: STEEL, MIL-S-8889 OR MIL-S-3044.
2. METHOD OF FORMING: HOT FORGE.
3. SURFACE ROUGHNESS SHALL BE  $1\sqrt{R}$  MAX. IN ACCORDANCE WITH ANSI B46.1.
4. HEAT TREATMENT: 170,000 TO 190,000 LB/NO. IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-8075.
5. FINISH: PHOSPHATE COAT, MIL-P-16232, TYPE Z, CLASS 40, FOLLOWED BY WAX EMULSION, MIL-W-3006.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES  $\pm .03$ .
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) ENTIRE STANDARD REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Substitutions for all other engineering and design applications and for repetitive use shall be made from this document.

USAF - 82  
USAF - 82  
ARMY - GL  
NAVY - AS

APPROVED 17 JUNE 70  
REVISED (A) 9 AUG 74

P.A. USAF - 82  
Other Cost  
ARMY - GL  
NAVY - AS  
PROCUREMENT SPECIFICATION  
MIL-H-7195

TITLE  
KNIFE, RELEASE, CARGO  
PLATFORM  
SUPERSEDES:  
AF DWG. 48A7313

MILITARY STANDARD  
MS 27761  
SHEET 1 OF 1