


FED. SUP CLASS  
1670

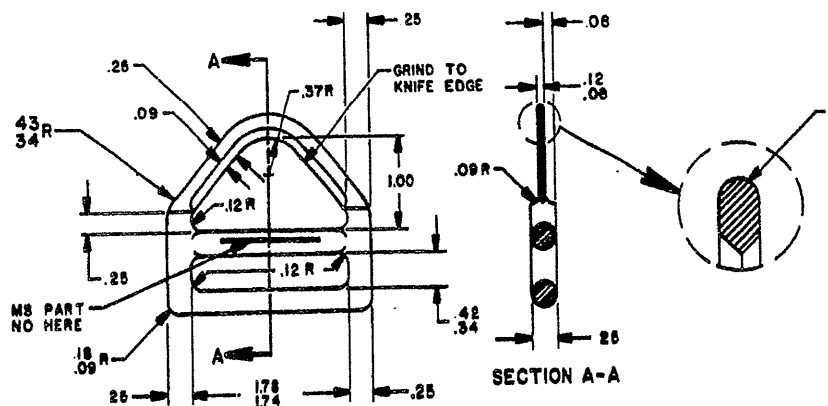

**NOTES:**

1. MATERIAL: STEEL, MIL-S-8820 OR MIL-S-8840.
2. METHOD OF FINISH: HOT FORGE.
3. SURFACE ROUGHNESS SHALL BE 125 MAX. IN ACCORDANCE WITH ANSI B46.1.
4. HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ. IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-8875.
5. FINISH: PHOSPHATE COAT, MIL-P-16232, TYPE Z, CLASS 48, FOLLOWED BY WAX EMULSION, MIL-W-3000.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES ±.02.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) ENTIRE STANDARD REVISED

P.A. USAF - 82	TITLE	MILITARY STANDARD
Other Cust:	KNIFE, RELEASE, CARGO PLATFORM	MS 27761
ARMY - GL		
NAVY - AS		
PROCUREMENT SPECIFICATION NIL-H-7195	SUPERSEDES: AF DWG. 48A7313	SHEET 1 OF 1

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Subsequent to this new engineering and design standard, all drawings and/or assemblies used shall be made from this document.

RECEIVED ON 14 APR 74  
REVISED 4 APR 74