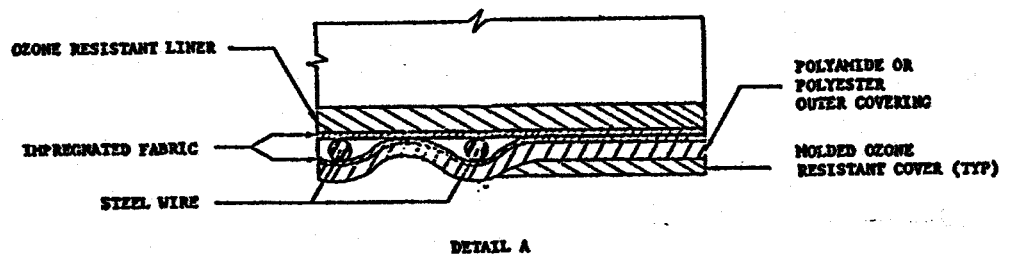
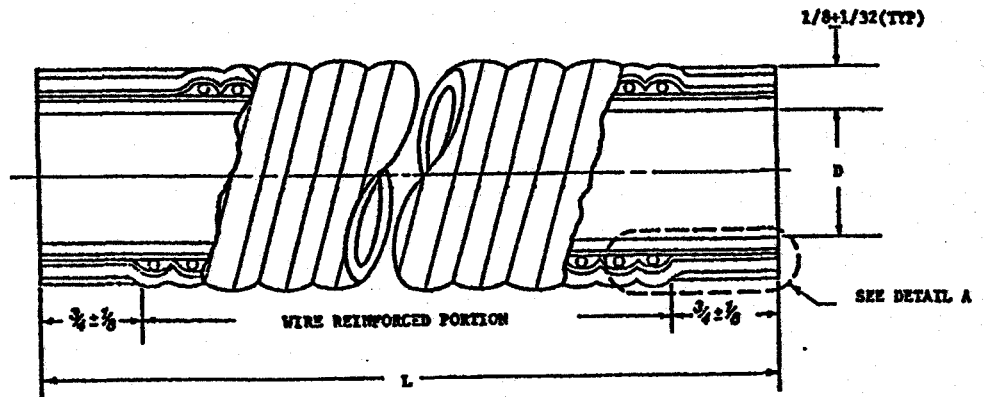


FED. SUP CLASS
165C

MS PART NUMBER	D-1/32	L ± 1/8
MS27797-6-12	3/8	5.2
-6-60	3/8	6.0
-6-130	3/8	12.0
-6-214	3/8	21.6
-10-120	5/8	12.0
-10-190	5/8	19.0
-10-200	5/8	20.0
-10-240	5/8	24.0

NOTES:

FIRST DASH IN MS NUMBER IS INSIDE DIAMETER IN SIXTEENTHS OF INCH
 SECOND DASH IN MS NUMBER IS LENGTH IN TENTHS OF INCHES
 HOSE MUST BE CLEAN, DRY, AND FREE FROM OIL, GREASE, AND OTHER FOREIGN MATERIAL.
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE AS SPECIFIED

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to comply with this standard when suitable.

P.A. Other Cont	AF-71	TITLE HOSE, OXYGEN AND PRESSURIZATION, OZONE RESISTANT	MILITARY STANDARD MS 27797 (USAF)
PROCUREMENT SPECIFICATION NIL-H-26795	SUPERSEDED	SHEET 1 OF 1	

DD FORM 672-1

U. S. GOVERNMENT PRINTING OFFICE: 1970-305-075-3-2410

APPROVED 15 DEC 1969 REVISED