
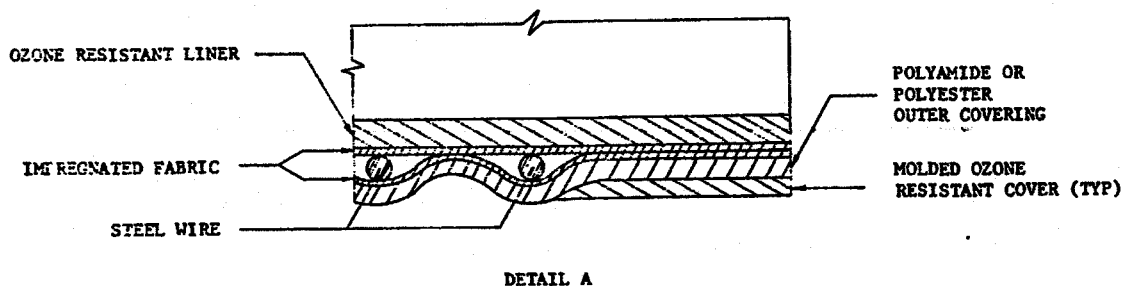


FED. SUP CLASS
166C

REVIEW ACTIVITY: AF-11, 82

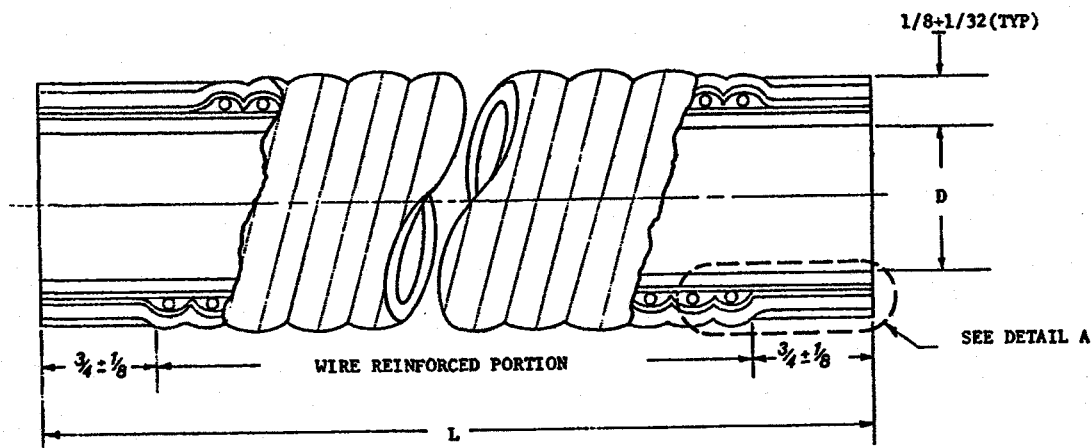

(A)

MS PART NUMBER	D ± 1/32	L ± 5%
MS27797-6-52	3/8	5.2
-6-60	3/8	6.0
-6-140	3/8	14.0
-6-214	3/8	21.4
-10-080	5/8	8.0
-10-120	5/8	12.0
-10-180	5/8	18.0
-10-200	5/8	20.0
-10-240	5/8	24.0

NOTES:

FIRST DASH IN MS NUMBER IS INSIDE DIAMETER IN SIXTEENTHS OF INCH
 SECOND DASH IN MS NUMBER IS LENGTH IN TENTHS OF INCHES
 HOSE MUST BE CLEAN, DRY, AND FREE FROM OIL, GREASE, AND OTHER FOREIGN MATERIAL
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE AS SPECIFIED

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Other Cost	AF-71 AF-99	TITLE HOSE, OXYGEN AND PRESSURIZATION, OZONE RESISTANT	MILITARY STANDARD MS27797(USAF)
PROUREMENT SPECIFICATION MIL-H-25385	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 672-1

APPROVED 15 DEC 1969 REVISED (A) 15 AUG 83