
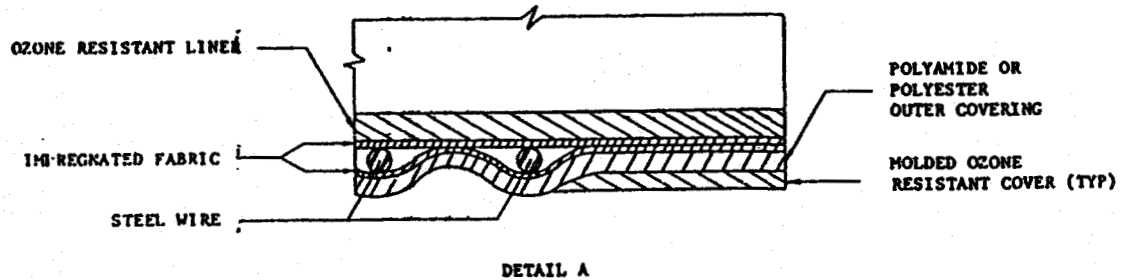


FED. SUP CLASS
166C

REVIEW ACTIVITY: AF-11, 82

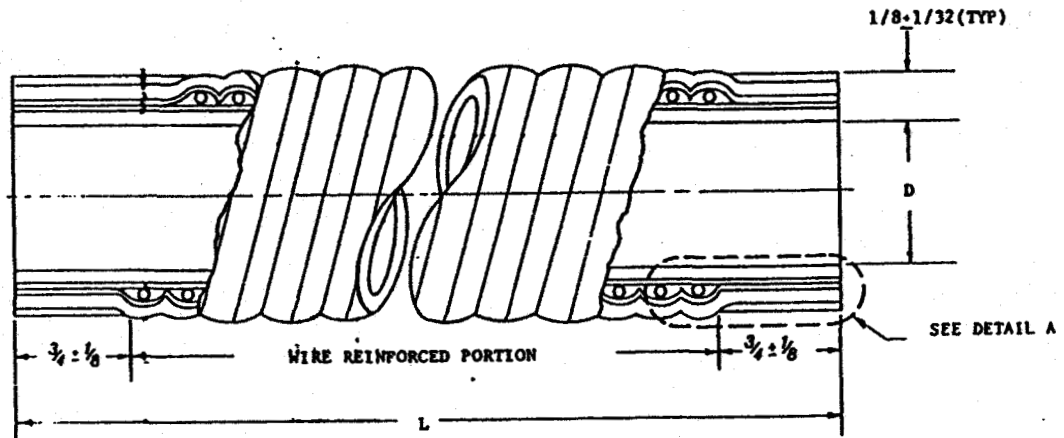

MS PART NUMBER	D ± 1/32	L ± 5%
MS27797-6-32	3/8	5.2
-6-60	3/8	6.0
-6-140	3/8	14.0
-6-214	3/8	21.4
-10-080	5/8	8.0
-10-120	5/8	12.0
-10-160	5/8	16.0
-10-200	5/8	20.0
-10-240	5/8	24.0
-10-085	5/8	8.5
-10-115	5/8	11.5

NOTES:

FIRST DASH IN MS NUMBER IS INSIDE DIAMETER IN SIXTEENTHS OF INCH
 SECOND DASH IN MS NUMBER IS LENGTH IN TENTHS OF INCHES
 HOSE MUST BE CLEAN, DRY, AND FREE FROM OIL, GREASE, AND OTHER FOREIGN MATERIAL
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE AS SPECIFIED

For information of the user, the following information is provided:
 1. The material of the hose and the material of the cover are not specified.
 2. The material of the hose and the material of the cover are not specified.
 3. The material of the hose and the material of the cover are not specified.
 4. The material of the hose and the material of the cover are not specified.
 5. The material of the hose and the material of the cover are not specified.
 6. The material of the hose and the material of the cover are not specified.
 7. The material of the hose and the material of the cover are not specified.
 8. The material of the hose and the material of the cover are not specified.
 9. The material of the hose and the material of the cover are not specified.
 10. The material of the hose and the material of the cover are not specified.

P.A. AF-71 Other Cust AF-99	TITLE HOSE, OXYGEN AND PRESSURIZATION, OZONE RESISTANT	MILITARY STANDARD MS 27797(USAF)
PROCUREMENT SPECIFICATION MIL-H-24189	SUPersedes:	SHEET 1 OF 1

DD FORM 672-1

APPROVED 15 DEC 1969 REVISED 4 15 AUG 1983 19 OCT 1984