
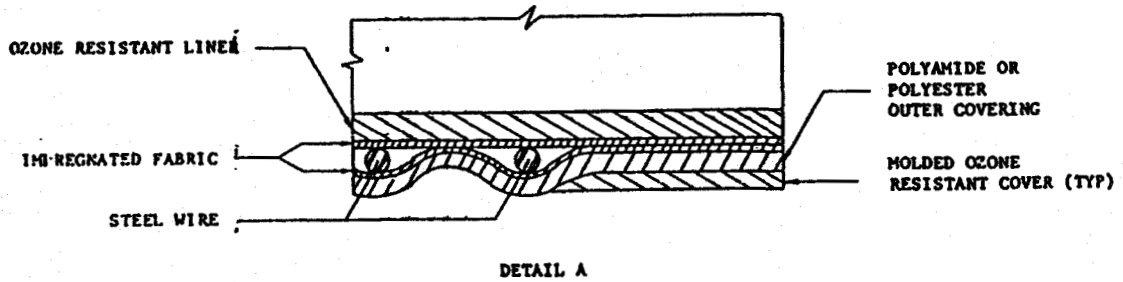


FED. SUP CLASS  
166C

REVIEW ACTIVITY: AF-11, 82

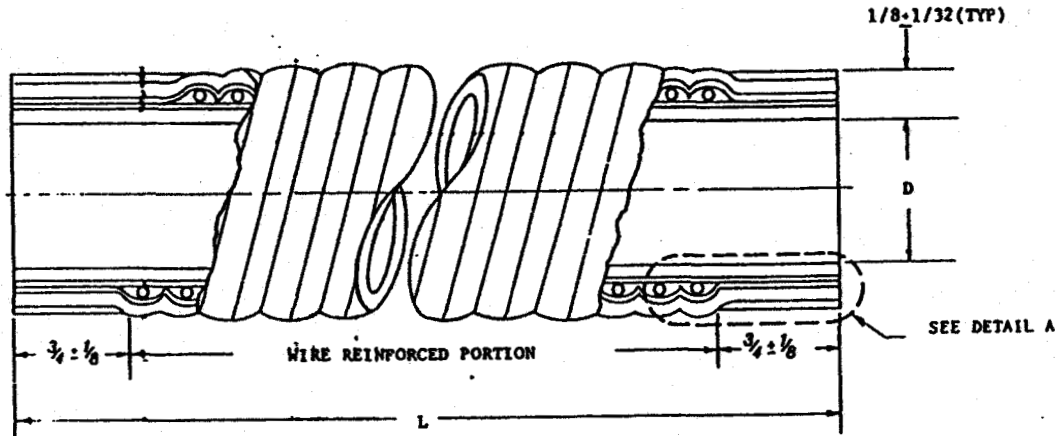

MS PART NUMBER	D ± 1/32	L ± 5%
MS27797-6-32	3/8	5.2
-6-50	3/8	6.0
-6-140	3/8	14.0
-6-214	3/8	21.4
-10-080	5/8	8.0
-10-120	5/8	12.0
-10-160	5/8	16.0
-10-200	5/8	20.0
-10-240	5/8	24.0
-10-085	5/8	8.5
-10-115	5/8	11.5

NOTES:  
 FIRST DASH IN MS NUMBER IS INSIDE DIAMETER IN SIXTEENTHS OF INCH  
 SECOND DASH IN MS NUMBER IS LENGTH IN TENTHS OF INCHES  
 HOSE MUST BE CLEAN, DRY, AND FREE FROM OIL, GREASE, AND OTHER FOREIGN MATERIAL  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ARE AS SPECIFIED

For information of the user, the following information is provided:  
 1. The number of the drawing is shown in the upper left corner.  
 2. The drawing is the property of the Department of Defense and is loaned to the user.  
 3. All drawings are to be used for information only and are not to be used for manufacturing or other purposes.  
 4. The user is to protect this drawing from unauthorized disclosure.  
 5. The user is to return this drawing to the source of issue when it is no longer needed.

APPROVED 15 DEC 1969 REVISED (A) 15 AUG 1983 (B) 19 OCT 1984

P.A. AF-71 Other Cust AF-99	TITLE HOSE, OXYGEN AND PRESSURIZATION, OZONE RESISTANT	MILITARY STANDARD <b>MS 27797(USAF)</b>
PROCUREMENT SPECIFICATION MIL-H-24195	SUPERSEDES:	SHEET 1 OF 1