



This drawing has been approved by the Department of the Air Force and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE—When procurement drawings, specifications, or other data are used for any purpose other than in connection with a definite Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
6680



DIAL SHOWN FOR REFERENCE ONLY.
SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.

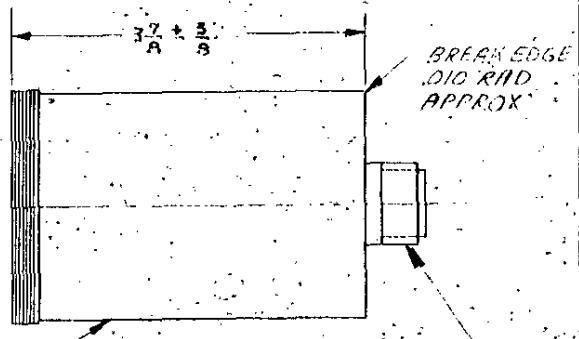

CASE IN ACCORDANCE WITH AND 10412 EXCEPT AS SHOWN

ELECTRICAL RECEPTACLE AND 10066D-105L-3P

MS PART NO
MS28000-1

(A) CANCELED AFTER 20 AUGUST 1965. USE MIL-I-25623 FOR REPLACEMENT. CANCELED PARTS SHOULD BE USED UNTIL STOCK IS DEPLETED.

DIMENSIONS IN INCHES.

APPROVED 10 Jan 51 REVISED (A) 20 Aug 65

P.A. USAF-11	TITLE	MILITARY STANDARD
Other Cust Navy - WP	INDICATOR TACHOMETER, 0-110 PERCENT RPM, 2-INCH SIZE	MS 28000(ASG)
Procurement Specification MIL-I-5573	SUPERSEDES:	SHEET 1 OF 1