



NOTES: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have furnished, or is any way supplied the said drawings, specifications, or other data is not to be regarded by implication as an endorsement of the views or opinions of the individual named herein, or of the views or opinions of the organization named herein, or of the views or opinions of the Government, or of the views or opinions of any other person or corporation, or of any patent or invention that may in any way be related thereto.

DRILL NO. 50 (.077)
2 HOLES

THE TWO .070 INCH HOLES ARE PROVIDED FOR SAFETY WIRING. ALTERNATE LOCATION ACROSS OPPOSITE CORNERS IS ACCEPTABLE

STAMP OR ENGRAVE MS PART NO.
MANUFACTURER'S PART NO.
NAME OF MANUFACTURER
MANUFACTURER'S SERIAL NO.

FED. SUP CLASS.
6685

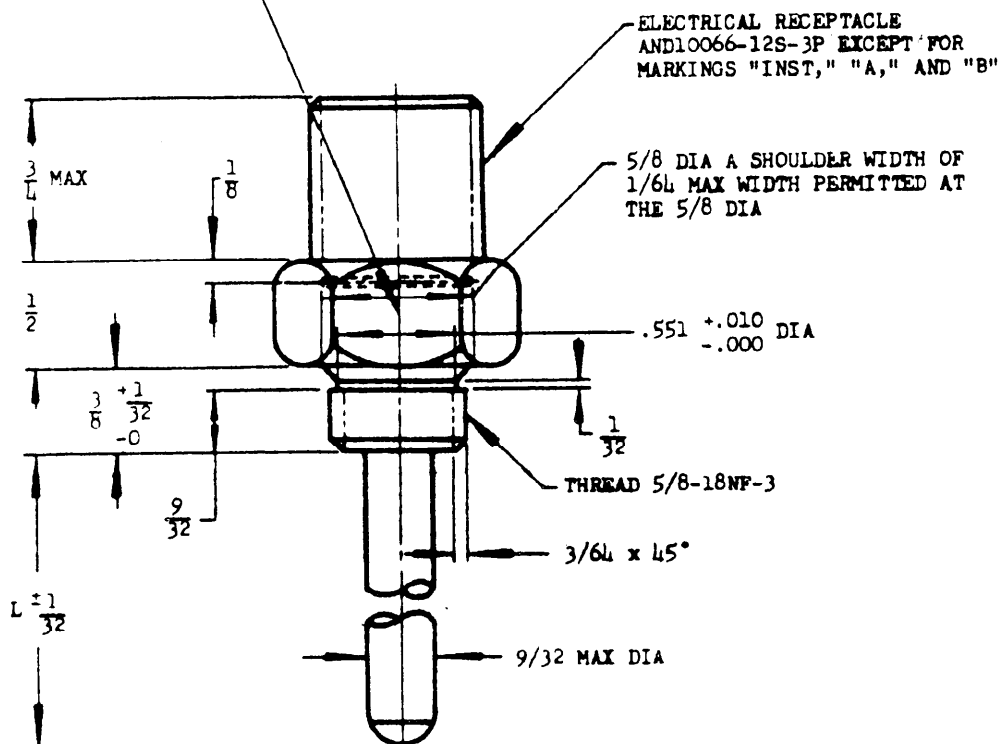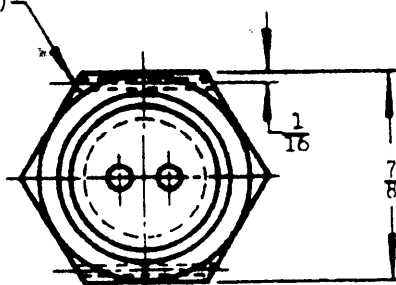

MS PART NO.	LENGTH "L"
MS28034-1	1-7/8
MS28034-2	4

THE CENTERLINE THROUGH THE ALIGNMENT KEY IN THE RECEPTACLE SHALL BE PERPENDICULAR TO THE CENTERLINE THROUGH THE PINS. THE POSITION OF THE PINS RELATIVE TO THE FLATS ON THE HEXAGONAL IS OPTIONAL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm 1/64$, ANGLES $\pm 2^\circ$.

THIS BULB TO BE FURNISHED WITH GASKET AN900-10.

REFERENCED SPECIFICATIONS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

A SHEET NO. 2 ADDED.

CUSTODIANS Navy - BuAer Air Force Army - SigC	OTHER INT. A - T N - S AF -	MILITARY STANDARD	MS28034
		BULBS, TEMPERATURE, ELECTRICAL RESISTANCE (-70°C TO +300°C)	
Procurement Specification MTI-R-7200	SUPERSEDES:	DRAWING AN5525	SHEET 1 OF 2


APPROVED 21 NOV 52 REVISED 25 NOV 52 24 MAR 55

NOTES: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as an endorsement or approval of the quality, value, or use of any other person or organization, or carrying any rights or privileges of manufacture, use, or sale of any patented invention that may in any way be related thereto.

FED. SUP CLASS.
6685


THE TWO .070 INCH HOLES
ARE PROVIDED FOR SAFETY
WIRING. ALTERNATE LOCA-
TION ACROSS OPPOSITE
CORNERS IS ACCEPTABLE

DRILL .070
AND 10387
2 HOLES

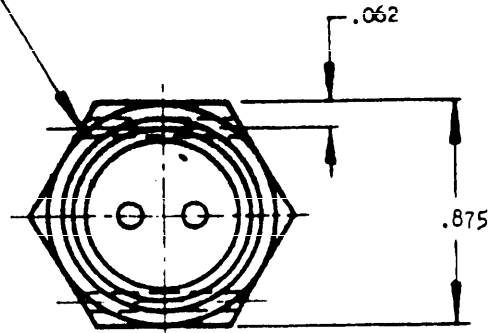

STAMP OR ENGRAVE MS PART NO.,
MANUFACTURER'S PART NO.,
NAME OF MANUFACTURER,
MANUFACTURER'S SERIAL NO.

ELECTRICAL RECEPTACLE
AND 10066-12S-3P EXCEPT
FOR MARKINGS "INST,"
"A," AND "B"

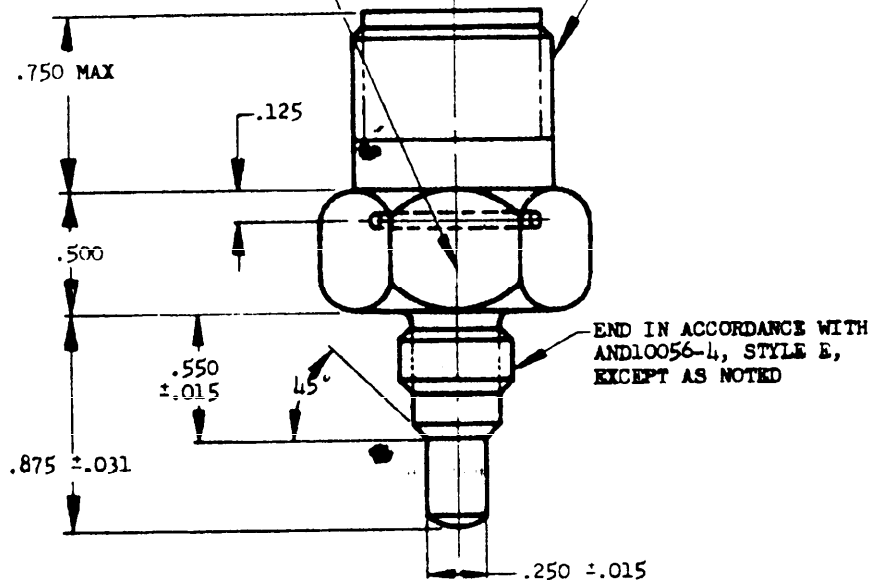

MS PART NO.	FIIN
MS28034-3	

THE CENTERLINE THROUGH THE ALIGNMENT KEY IN THE RECEPTACLE SHALL BE PERPENDICULAR TO THE CENTERLINE THROUGH THE PINS. THE POSITION OF THE PINS RELATIVE TO THE FLATS ON THE HEXAGONAL IS OPTIONAL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .016$,
ANGLES $\pm 1/2^\circ$.

THE BULB TO BE FURNISHED WITH GASKET AN900-7.

APPROVED 24 Mar 55 REVISED

CUSTODIANS Navy - BuAer Air Force Army - SigC	OTHER INT. A - T N - S AF -	MILITARY STANDARD	MS28034
		BULBS, TEMPERATURE, ELECTRICAL RESISTANCE (-70°C TO +300°C)	
Procurement Specification MIL-B-7990	SUPERSEDES:	SHEET 2 OF 2	