



NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

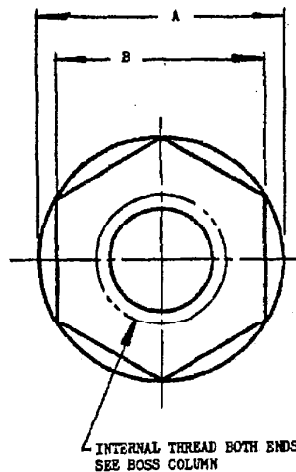

CLEARANCE ENVELOPE FOR BODY OF VALVE. DESIGN WITHIN THIS AREA OPTIONAL. CONTINUOUS HEX PERMISSIBLE.

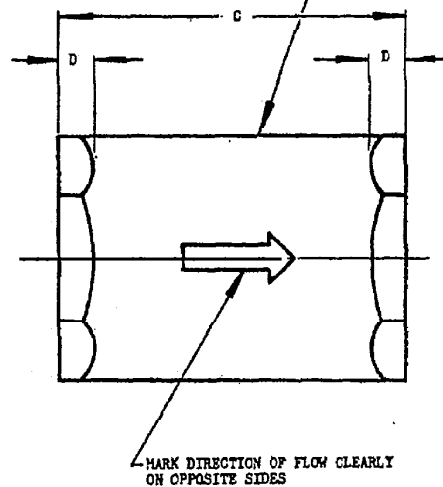

FED. SUP. CLAS.
L520

HS PART NO.	FTIN	A MAX	B MAX	C ±1/16	D MTN	WT MAX LB	BOSS	GASKET TWO EACH REQUIRED	TUBING SIZE (RPP) OD
MS28050-1		1.750	1.125	2.250	.250	.30	AND10050-4	AN6290-4	.250
MS28050-2							AND10050-6	AN6290-6	.375
MS28050-3		2.000	1.250	2.500	.281		AND10050-8	AN6290-8	.500
MS28050-4		2.188	1.375	3.000	.312	.45	AND10050-10	AN6290-10	.625
MS28050-5		2.500	1.750	3.500	.344	.60	AND10050-16	AN6290-16	1.000

DESIGNED FOR USE WITH AIR, COOLANTS AND WATER AT PRESSURES NOT EXCEEDING 50 PSI.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

CUSTODIANS Navy - BuAer Air Force	OTHER INT. A - N - AF -	MILITARY STANDARD		MS28050 (ASG)
		VALVE, CHECK, LOW PRESSURE, INTERNAL THREADS		
PROCUREMENT SPECIFICATION MIL-V-6129		SUPERSEDES:		SHEET 1 OF 1

APPROVED 1 Sep 55 REVISED