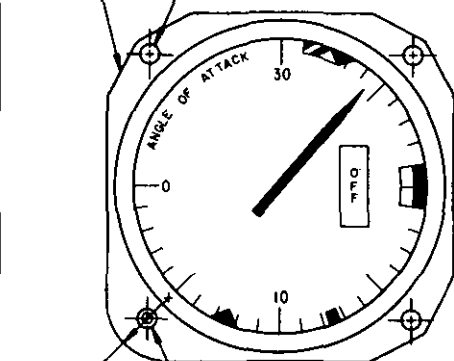
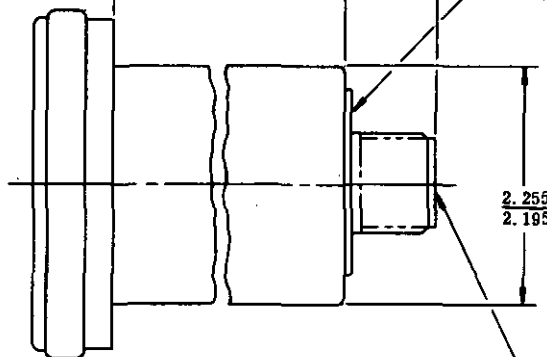


FED. SUP CLASS
6610CASE IN ACCORDANCE WITH
MS33638, 3 INCH SIZE CASE
EXCEPT AS SHOWN3 HOLES EQUALLY SPACED
ON 4 HOLE SPACING.593
.531 RDIAL READING AT 3 O'CLOCK
ADJUSTABLE BY MEANS OF
EXTERNAL HEXAGON WRENCH
3/32 ACROSS FLATS5.125 MAX.
.850
.800

NAMEPLATE

ELECTRICAL CONNECTOR TO MATE
WITH MS3106-20-29S. CONNECTOR LOCATED
ON VERTICAL AND HORIZONTAL CENTERLINES.

PART NO.	WEIGHT
MS28062-1	1.8 LBS. MAX

NOTES:

1. DIMENSIONS IN INCHES.
 2. DIAL AND INDICES SHOWN FOR REFERENCE ONLY. SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.
- Ⓒ INACTIVE FOR DESIGN AFTER DEC.68 , NO SUPERSEDING STANDARD. USE ONLY FOR REPLACEMENT OF IDENTICAL ITEMS IN EXISTING MILITARY EQUIPMENT.

Ⓓ **CANCELLED** 27 JUNE 1978 **SUPERSEDED BY MS28067**

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓒ ENTIRE STANDARD REVISED AND REDRAWN

P.A. NAVY - AS Other Cus.	TITLE INDICATOR, ANGLE OF ATTACK, 2-3/4 DIAL, 28 VOLT D.C.	MILITARY STANDARD MS28062 (AS)
PROCUREMENT SPECIFICATION MIL-I-18856 (AS)	SUPERSEDES: MS28062(WEP)	SHEET 1 OF 2

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709