


FED. SUP CLASS
6610


CASE IN ACCORDANCE WITH
MS33638, 3 INCH SIZE CASE
EXCEPT AS SHOWN

3 HOLES EQUALLY SPACED
ON 4 HOLE SPACING

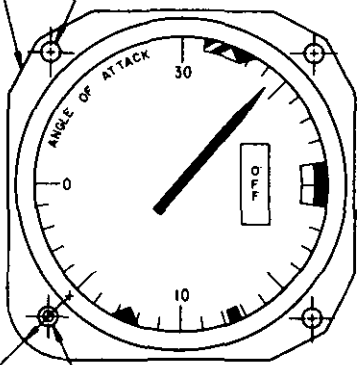

.593
.531 R

DIAL READING AT 3 O'CLOCK
ADJUSTABLE BY MEANS OF
EXTERNAL HEXAGON WRENCH
3/32 ACROSS FLATS

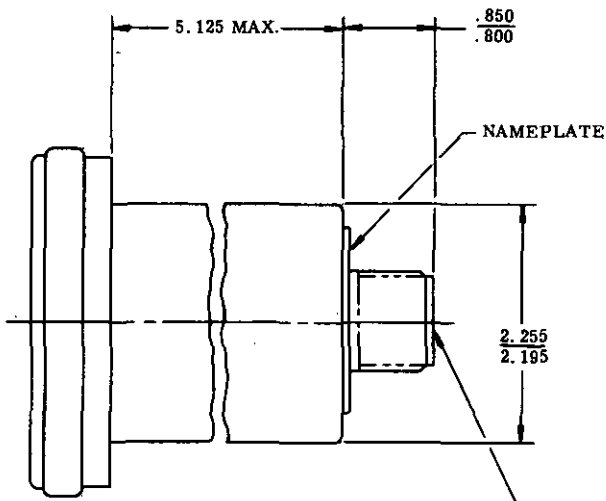

ELECTRICAL CONNECTOR TO MATE
WITH MS3106-20-29S. CONNECTOR LOCATED
ON VERTICAL AND HORIZONTAL CENTERLINES.

PART NO.	WEIGHT
MS28062-1	1.8 LBS. MAX

NOTES:

1. DIMENSIONS IN INCHES.
 2. DIAL AND INDICES SHOWN FOR REFERENCE ONLY. SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.
- (C) INACTIVE FOR DESIGN AFTER DEC.68 , NO SUPERSEDING STANDARD. USE ONLY FOR REPLACEMENT OF IDENTICAL ITEMS IN EXISTING MILITARY EQUIPMENT.

(D) **CANCELLED** 27 JUNE 1978 **SUPERSEDED BY MS28067**

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED AND REDRAWN

P.A. NAVY - AS Other Cus.	TITLE	MILITARY STANDARD
	INDICATOR, ANGLE OF ATTACK, 2-3/4 DIAL, 28 VOLT D.C.	MS28062 (AS)
PROCUREMENT SPECIFICATION MIL-I-18856 (AS)	SUPERSEDES: MS28062(WEP)	SHEET 1 OF 2

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by their activity. All other military activities are required to employ this standard where suitable.

APPROVED 8 JUNE 1955 REVISED (A) 8 DECEMBER 1955 (B) 2 MAY 1960 (C) 31 MARCH 1969 (D) 27 JUN 1978