


USER ACTIVITIES:

REVIEWER ACTIVITIES: ARMY - AV

DLA - CS

AIR FORCE - 85

**DISTRIBUTION STATEMENT A.** Approved for public release; distribution is unlimited.  
This military standard is approved for use by all Departments and Agencies of the Department of Defense.  
Selection for all new engineering and design applications and for repetitive use shall be made from this document.

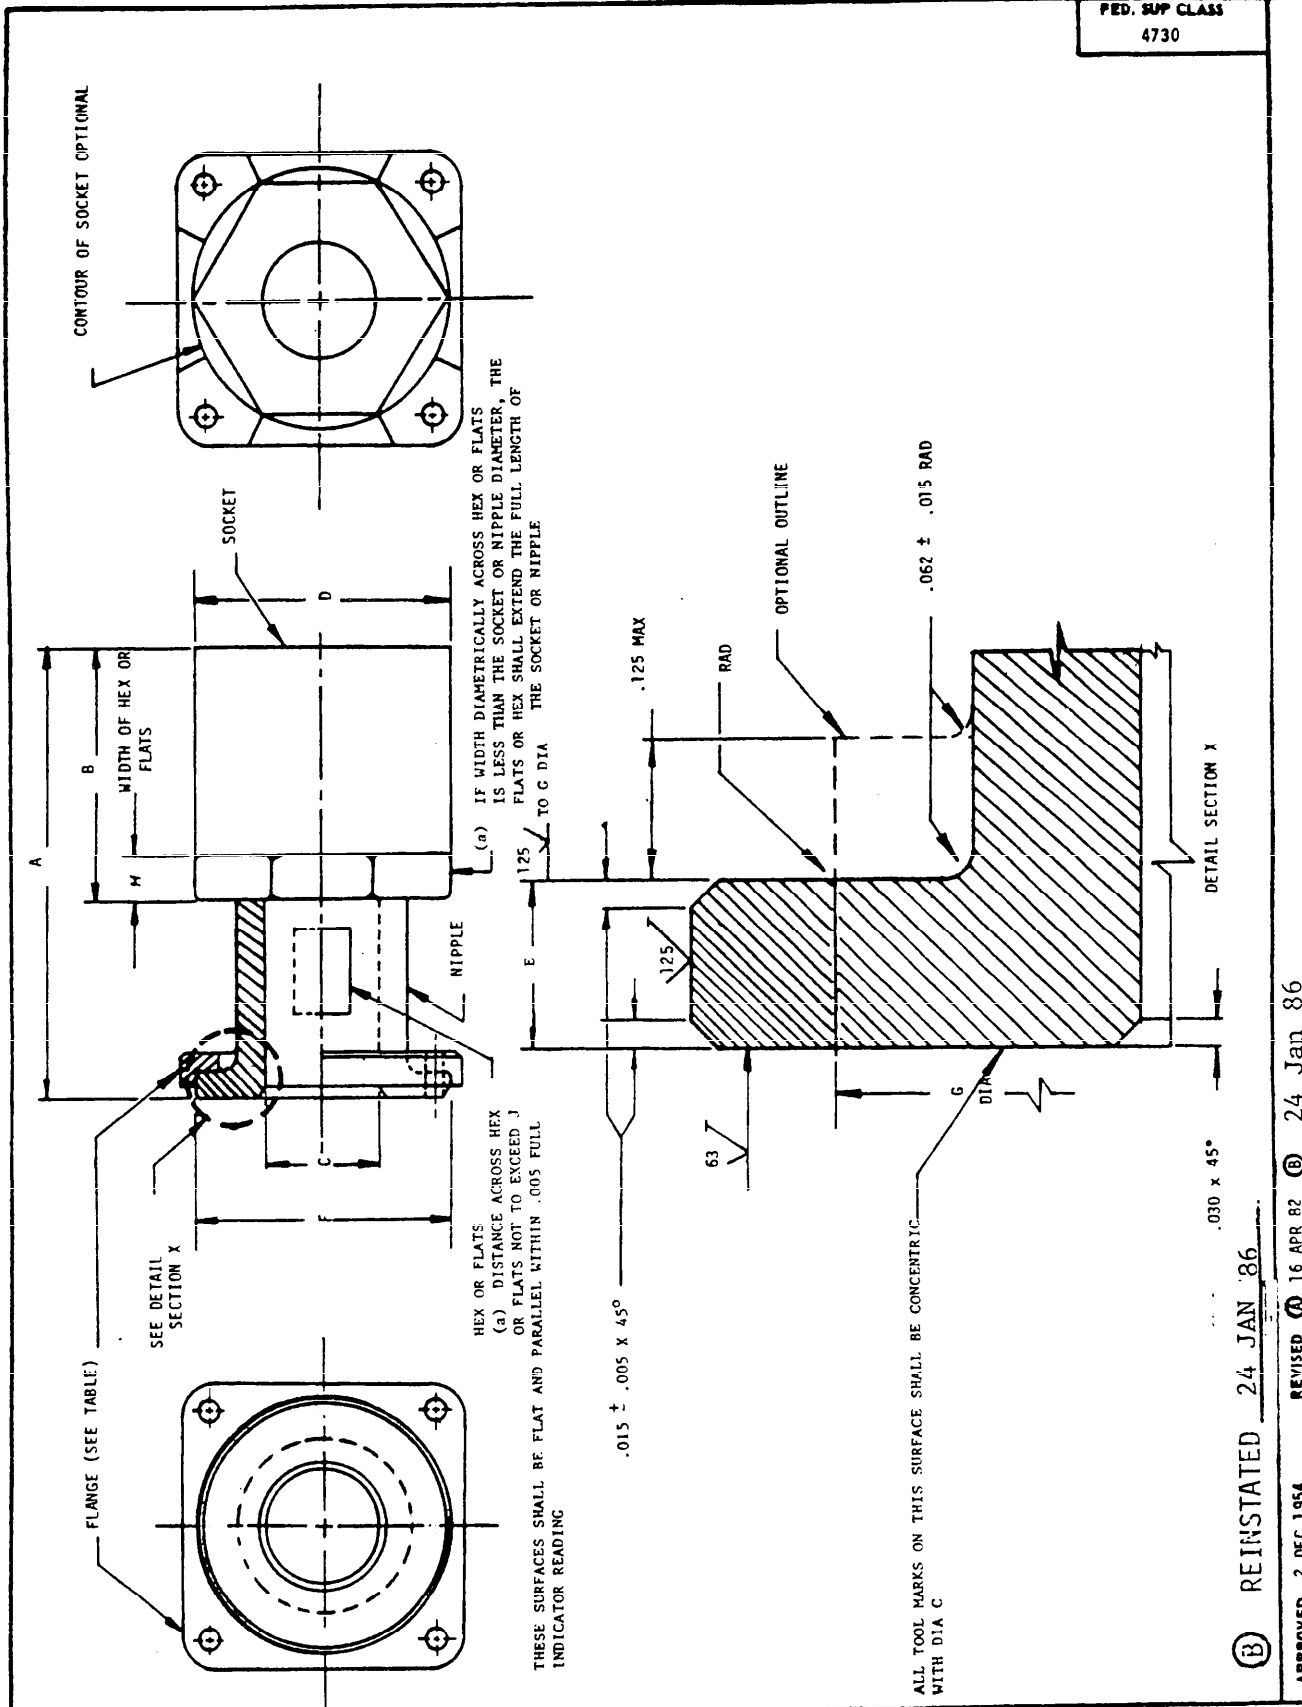

P. A. USAF - 82 Other Cust (B) AF - 99 ARMY - ME NAVY - AS	INTERNATIONAL INTEREST	TITLE FITTING END, SELF SEALING FUEL HOSE, SWIVEL DETACHABLE, FLANGED, STRAIGHT
PROCUREMENT SPECIFICATION	SUPERSEDES:	

MILITARY STANDARD	
MS 28753	
SHEET 1	OF 2

(B) REINSTATED 24 JAN 86  
REVISED (A) 16 APR 82 (B) 24 Jan 86  
APPROVED 2 DEC 1954

FED. SUP CLASS  
4730

MS PART NO.	NOMINAL TUBING AND HOSE SIZE REF	FLANGE PART NUMBER	A MAX	B MAX	(b)C MIN DIA	D MAX	F +.000 -.005	(b)F +.000 -.005 DIA	(b)C MAX DIA	H MIN	J REF	WRIGHT LB APPROX
MS28753D16	1	MS2075D16	3.141	2.000	.813	1.953	.156	1.500	1.188	.375	1.343	.261
MS28753D20	1 1/4	MS2075D20	3.141	2.000	1.047	2.313	.156	1.844	1.500	.500	1.656	.299
MS28753D24	1 1/2	MS2075D24	3.078	2.000	1.281	2.563	.188	2.125	1.750	.500	1.906	.305
MS28753D32	2	MS2075D32	3.500	2.250	1.750	3.125	.188	2.750	2.375	.625	2.531	.325
MS28753D40	2 1/2	MS2075D40(c)	3.891	2.500	2.250	3.625	.188	3.281	2.875	1.000	3.031	.607
MS28753D48	3	MS2075D48(c)	3.891	2.500	2.875	4.438	.188	3.781	3.375	1.250	3.250	.954

- (a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
- (b) DIAMETERS F, G AND C SHALL BE CONCENTRIC WITHIN .010 FULL INDICATOR READING.
- (c) HEX FLANGE MS20756 NOT SHOWN.

(B)

MATERIAL: ALUMINUM ALLOY.

(B)

FOR SURFACE ROUGHNESS, SEE ANSI B46.7-78  
 THE INTERIOR SURFACE OF THE FITTING SHALL BE SMOOTH AND FREE FROM PROJECTIONS.  
 REMOVES ALL BURRS AND SHARP EDGES.  
 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS + .010, ANGLES + 1°.  
 THE AIRPLANE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATION.  
 FITTINGS SHALL BE PERMANENTLY MARKED WITH THE MS PART NUMBER ON AN UNFINISHED SURFACE OF THE NIPPLE.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:

ARMY - AV  
 DLA - CS  
 AIR FORCE - 85

REVIEWER ACTIVITIES:  
 This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 2 DEC 1954 REVISED (A) 16 APR 82 FOR CHANGES SEE PAGES 1 AND 2.

P. A. USAF - 82 Other Cost (B) AIR FORCE - 99 ARMY - ME NAVY - AS	INTERNATIONAL INTEREST	TITLE FITTING END, SELF SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, STRAIGHT	MILITARY STANDARD
			MS 28753
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2	