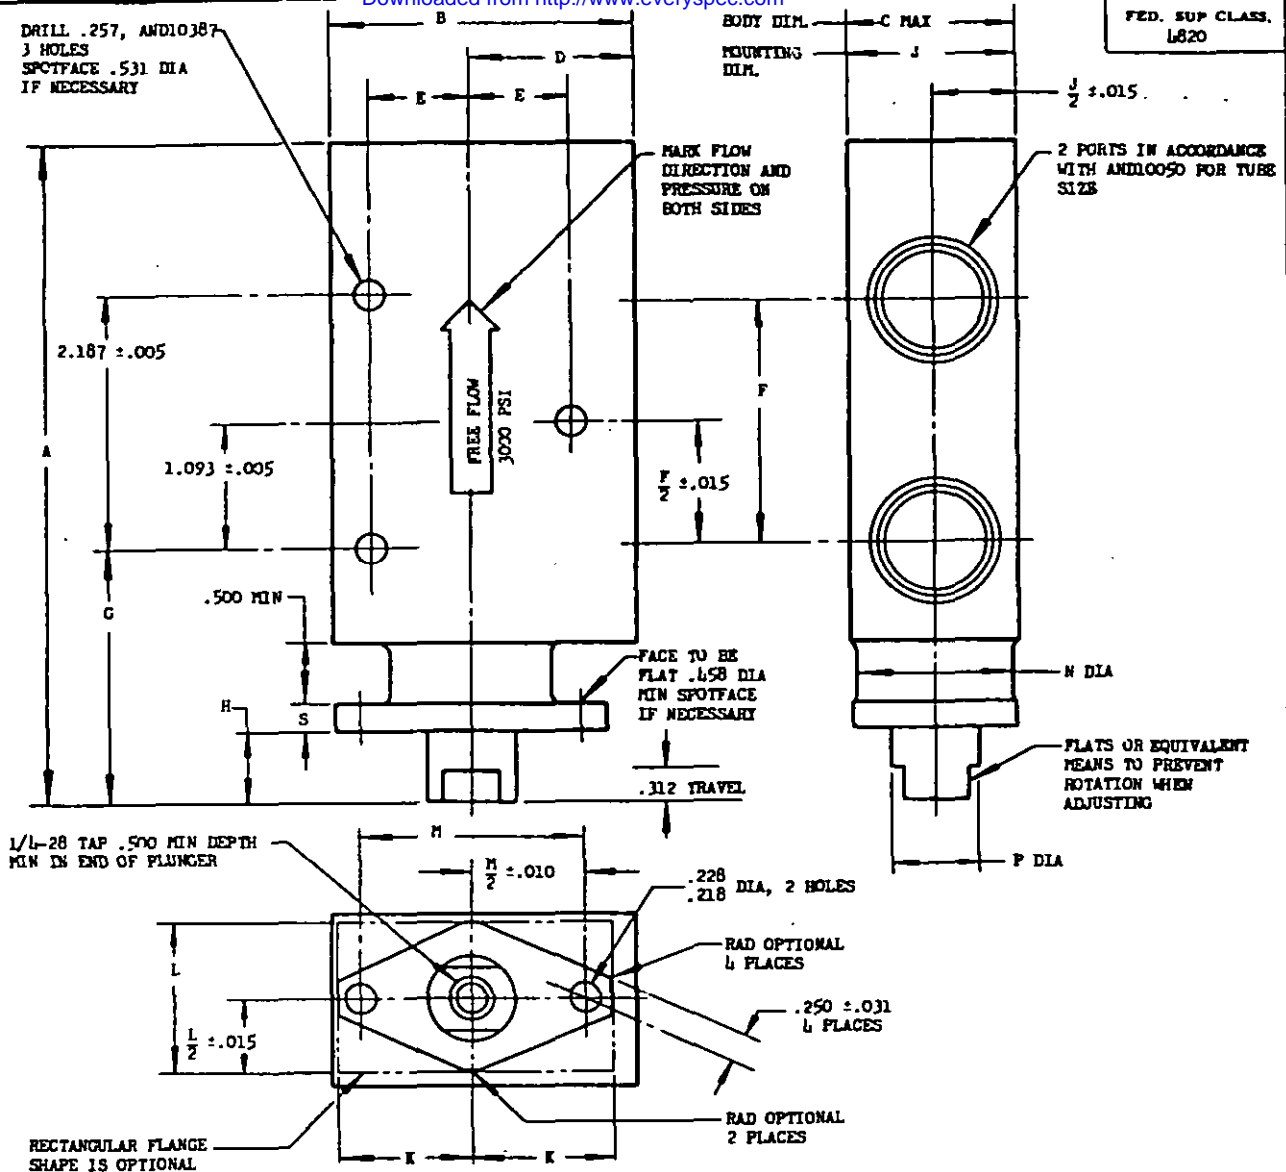


[illegible][illegible]

PRESSURE DROP TAKEN AT .188-INCH TRAVEL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± 0.015 .

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) MS28757(AER) CONVERTED TO MS28758(ASG).

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

CUSTODIANS Navy - BuAer Air Force	OTHER INT. A - N - AF -	MILITARY STANDARD	MS28768 (ASG)
		VALVE, CHECK, CONTROLLABLE, PLUNGER-TYPE, HYDRAULIC, 3,000 PSI, TYPE II SYSTEMS	
PROCUREMENT SPECIFICATION MIL-V-15067		SUPERSEDES:	SHEET 1 OF 1

APPROVED 13 Sep 55
REVISED (A) 3 May 57